

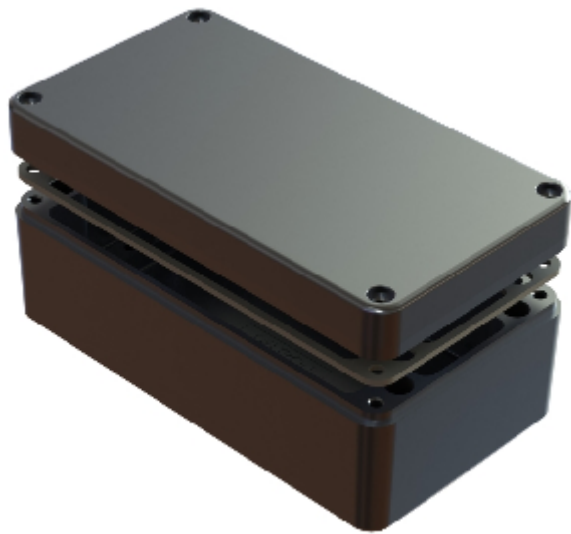
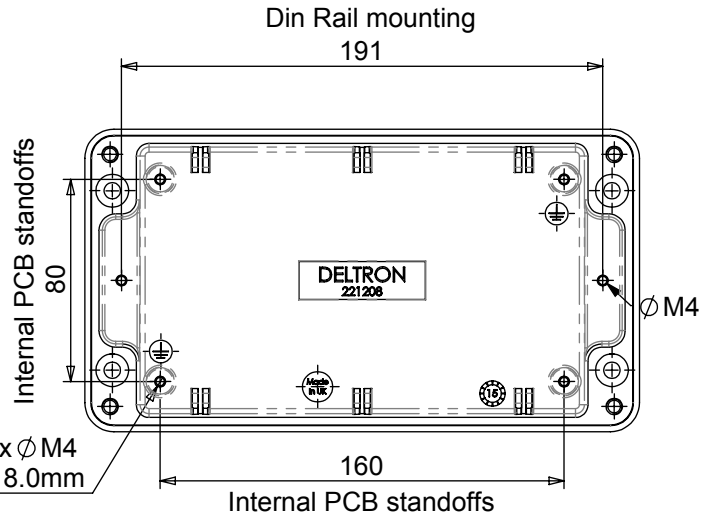
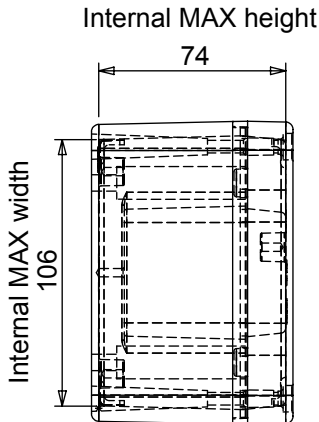
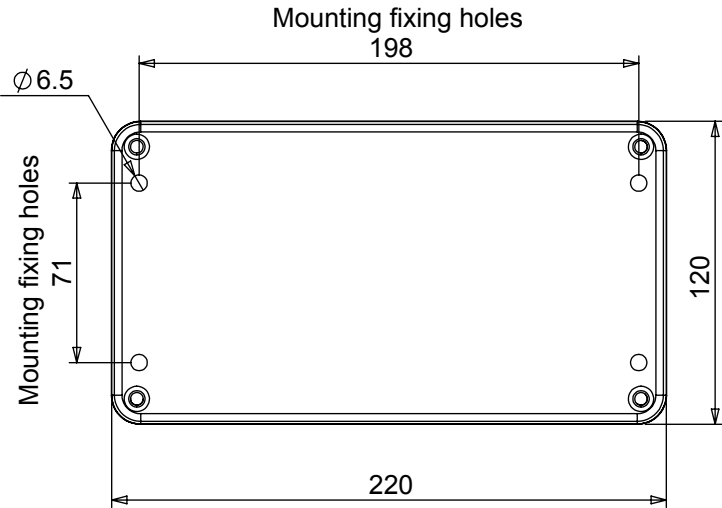


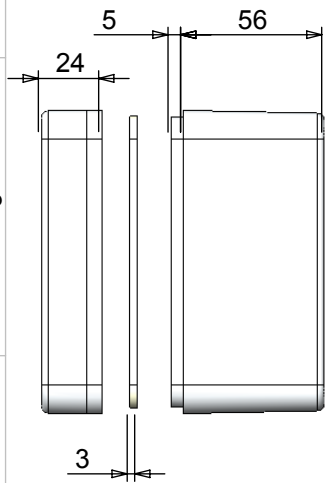

Length	Width	Height	Un-Painted	Powder Coat	Nylon Coat
220	120	80	486-221208-66	487-221208*-66	488-221208*-66
Box Dimensions in mm			Colour Option - Colour suffix * - Grey= A / Blue= B / Black= E		

- Die cast aluminium enclosure sealed to
BS EN 60529:1992 IP66, IP67
- 3mm One piece Die cut Silicone Rubber Sponge 01-255FR Seal
 - Seal has Self Adhesive Backing. 01-255SAB Suitable for -60 °c to 240 °c.
 - Min seal thickness 3.0mm - min seal frame width 3.5mm
 - Min enclosure wall thickness 3mm
 - Min enclosure lid thickness 3mm
 - PCB maximum dimensions 106mm Length, 1.7mm Width
 - Enclosures can be supplied Machined to your specifications
 - Made in the UK

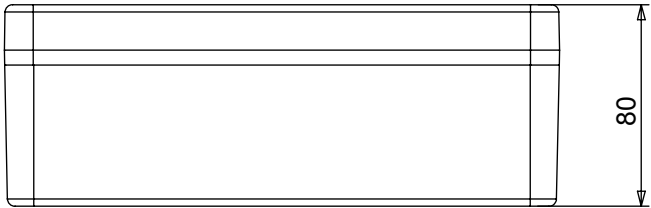

Tel No. +44(0)1724 273200 Website www.dem-uk.com



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
ALPHA 3 MANUFACTURING.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
ALPHA 3 MANUFACTURING IS PROHIBITED.



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES.
TOLERANCE:
NO DECIMAL PLACES ±0.2mm
1 DECIMAL PLACE ±0.1mm
2 DECIMAL PLACES ±0.05mm
ANGULAR TOLERANCE: ±1°

FINISH -
See paint code for colour


IF IN DOUBT ASK
DO NOT SCALE DRAWING

MATERIAL LM24 / LM2

DEBURR AND BREAK
SHARP EDGES

DRAWN BY
APPROVED BY

THIRD ANGLE PROJECTION



SPB
WC

SHEET 1 OF 1

SCALE 1:3
A4

TITLE
**HEAVY DUTY
DIE-CAST ENCLOSURE
IP66**

DRAWING NO.
486-221208-66

ISSUE
04
Release