

RoHS Compliant

Circuit 1





LCK-WF-A150Z-NA

连晟欣
LCK

产品类别
WF: WAFER 针座

产品间距
ZH 1.50 直针: A150Z
ZH 1.50 弯针: A150WZ

PIN 位
2A: 2PIN
.....
15A: 15P

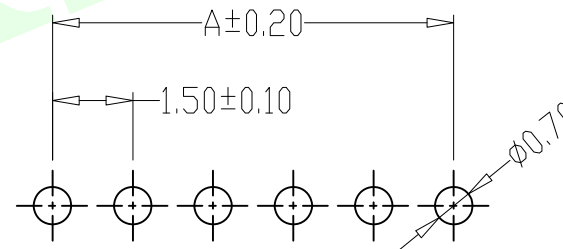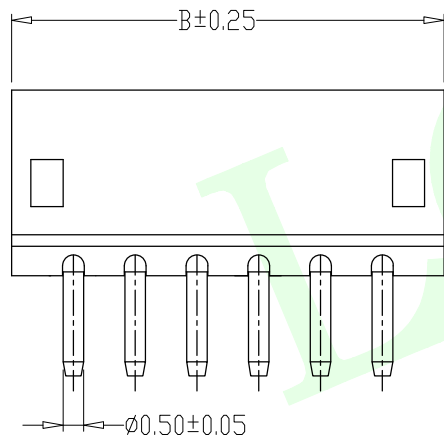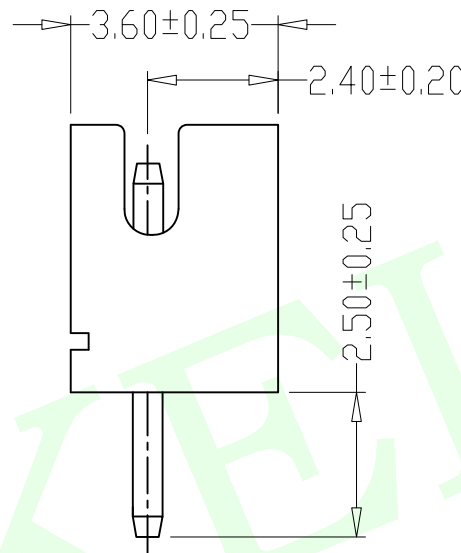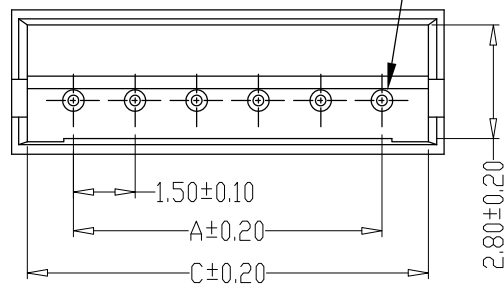

PIN	尺寸 (mm)		
	A	B	C
02A	1.50	4.50	3.70
03A	3.00	6.00	5.20
04A	4.50	7.50	6.70
05A	6.00	9.00	8.20
06A	7.50	10.50	9.70
07A	9.00	12.00	11.20
08A	10.50	13.50	12.70
09A	12.00	15.00	14.20
10A	13.50	16.50	15.70
11A	15.00	18.00	17.20
12A	16.50	19.50	18.70
13A	18.00	21.00	20.20
14A	19.50	22.50	21.70
15A	21.00	24.00	23.20
16A	22.50	25.50	24.70
17A	24.00	27.00	26.20
18A	25.50	28.50	27.70
19A	27.00	30.00	29.20
20A	28.50	31.50	30.70

SPECIFICATIONS

- Current Rating: 1A AC, DC
- Voltage Rating: 100V AC, DC
- Temperature Range: -25°C ~ +85°C
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 500MΩ Min
- Withstanding Voltage: 500V AC/minute
- Material: Wafer PBT/PA46 White/Beige, UL94V-0
PIN Brass Tin-plated

PCB LAYOUT




MEASURE POINT:	QUADRANT POINT	TANGENCY POINT	INTERSECTION POINT
	QP	TP	IP
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	X. ±0.20	X.x ±0.10	X.xx ±0.05
	ANGULAR	±3°	



联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	WAFER ZH1.50 直针
CHECKED		DATE			
APPROVED		DATE			
PART NO:	LCK-WF-A150Z-NA	REV:	04	SCALE:	1:1
DRAWING NO:	ZH150Z-NA	SIZE:	A4	SHEET:	1/1

RoHS Compliant

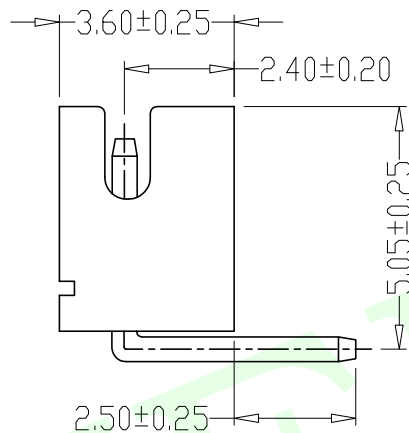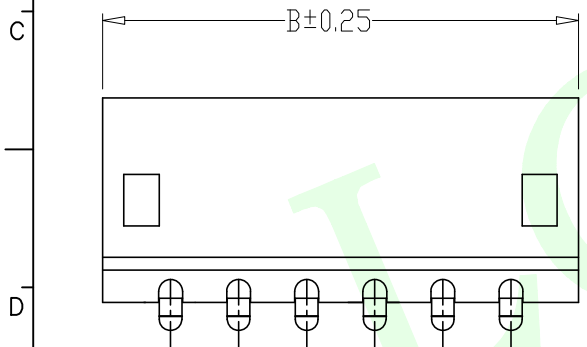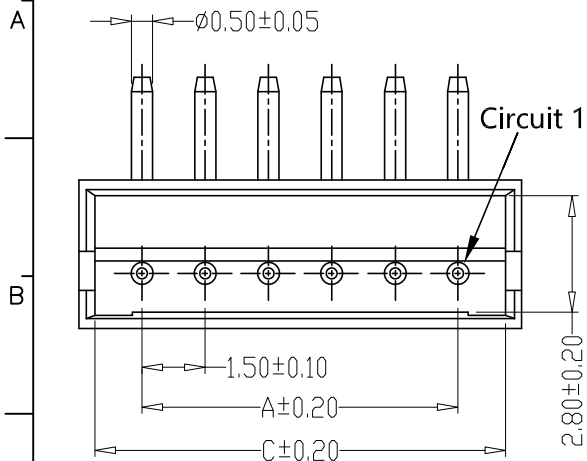

LCK-WF-A150WZ-NA
连晟欣
LCK
产品类别
WF: WAFER 针座
产品间距
ZH 1.50 直针: A150Z
ZH 1.50 弯针: A150WZ
PIN 位
2A: 2PIN
.....
15A: 15P

PIN	尺寸 (mm)		
	A	B	C
02A	1.50	4.50	3.70
03A	3.00	6.00	5.20
04A	4.50	7.50	6.70
05A	6.00	9.00	8.20
06A	7.50	10.50	9.70
07A	9.00	12.00	11.20
08A	10.50	13.50	12.70
09A	12.00	15.00	14.20
10A	13.50	16.50	15.70
11A	15.00	18.00	17.20
12A	16.50	19.50	18.70
13A	18.00	21.00	20.20
14A	19.50	22.50	21.70
15A	21.00	24.00	23.20
16A	22.50	25.50	24.70
17A	24.00	27.00	26.20
18A	25.50	28.50	27.70
19A	27.00	30.00	29.20
20A	28.50	31.50	30.70

SPECIFICATIONS

- Current Rating: 1A AC, DC
- Voltage Rating: 100V AC, DC
- Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Contact Resistance: $20\text{m}\Omega$ Max
- Insulation Resistance: $500\text{M}\Omega$ Min
- Withstanding Voltang: 500V AC/minute
- Material: Wafer PBT/PA46 White/Beige, UL94V-0
PIN Brass Tin-plated

PCB LAYOUT

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT	GP TP IP	联晟欣连接器 (深圳) 有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd			
UNLESS OTHERWISE SPECIFIED, TOLERANCE:		DESIGN	Andy	DATE	2014.12.24
X. ± 0.20		CHECKED		DATE	
X.x ± 0.10		APPROVED		DATE	
X.xx ± 0.05		PART NO:	LCK-WF-A150WZ-NA	REV:	04
ANGULAR $\pm 3^{\circ}$		DRAWING NO:	ZH150WZ-NA	SCALE:	1:1
				UNIT:	mm
				SHEET:	1/1