
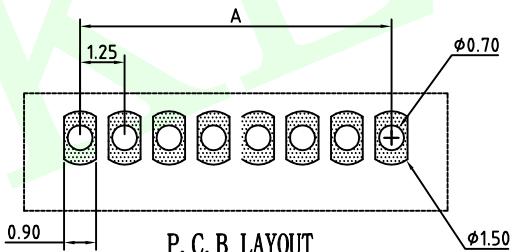
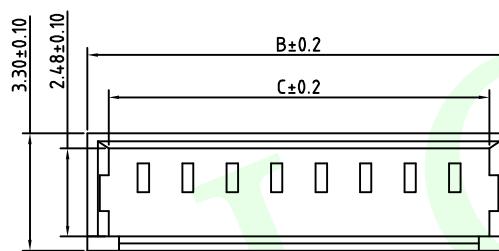
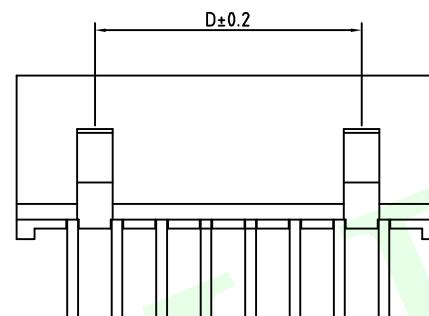



1 2 3 4 5 6 7

RoHS Compliant

A

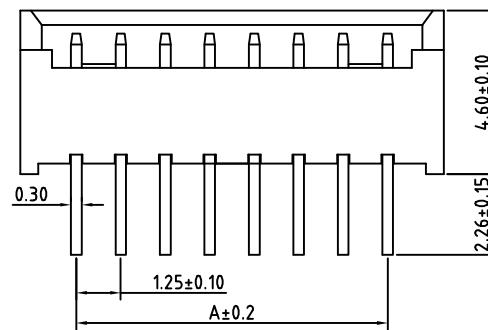

Pin	A	B	C	D
2	1.25	4.40	3.20	
3	2.50	5.65	4.45	
4	3.75	6.90	5.70	2.50
5	5.00	8.15	6.95	3.75
6	6.25	9.40	8.20	5.00
7	7.50	10.65	9.45	6.25
8	8.75	11.90	10.70	7.50
9	10.00	13.15	11.95	8.75
10	11.25	14.40	13.20	10.00
11	12.50	15.65	14.45	11.25
12	13.75	16.90	15.70	12.50
13	15.00	18.15	16.95	13.75
14	16.25	19.40	18.20	15.00
15	17.50	20.65	19.45	16.25
16	18.75	21.90	20.70	17.50

技术参数

间距: 1.25

温度范围: -25~+85°C

额定电压: 125V AC, DC

额定电流: 1.0A AC, DC

接触电阻: 20mΩ

绝缘电阻: 100MΩ

耐压: 500V AC/minute

LCK-WF-A1250Z-NA
连晟欣
LCK
产品类别
WF: WAFER针座
产品间距
MX 1.25直针: A1250Z
MX 1.25弯针: A1250WZ

PIN位
2A:2PIN
.....
15A:15P

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT	QP TP IP	Lianshengxin Connector (Shenzhen) Co., Ltd Lianshengxin 连晟欣连接器(深圳)有限公司
UNLESS OTHERWISE SPECIFIED, TOLERANCE:		
X. ±0.20		
X.x ±0.10		
X.xx ±0.05		
ANGULAR ±3°		
DESIGN Andy	DATE	2014.12.24
CHECKED	DATE	
APPROVED	DATE	
PART NO: LCK-WF-A1250Z-NA	REV: 04	SCALE: 1:1
DRAWING NO: MX125Z-NA	SIZE: A4	UNIT: mm
	SHEET: 1/1	

1 2 3 4 5 6 7