

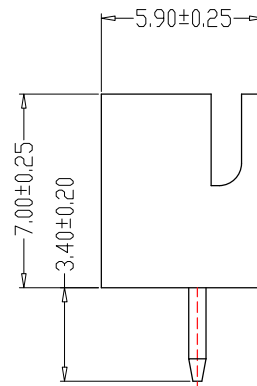


RoHS Compliant


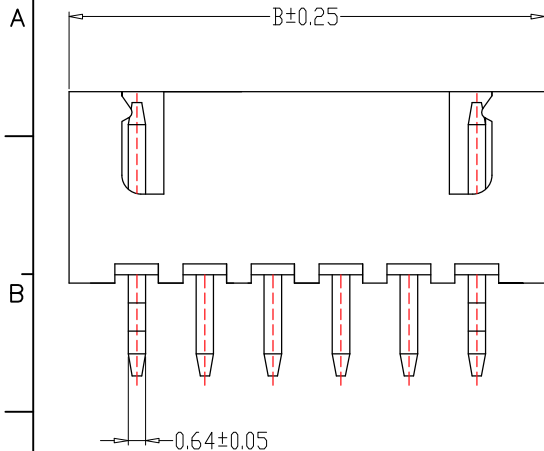


TYPE 1

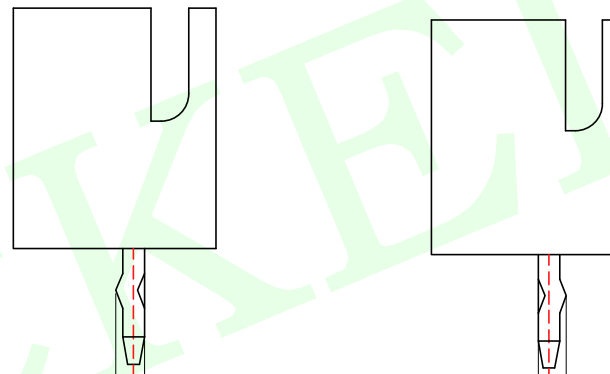

TYPE 2

TYPE 3

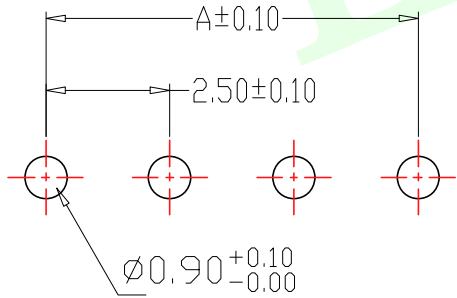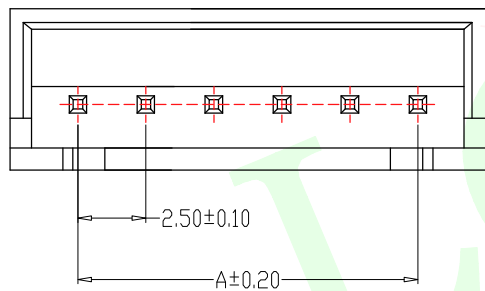

PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

LCK-WF-A254Z-NA

连晟欣
LCK

产品类别

WF: WAFER针座

产品间距

XH 2.54直针: A254Z

XH 2.54弯针: A254WZ

PIN位

2A: 2PIN

15A: 15P

Dimension mm

PIN	A	B
2P	2.50	7.50
3P	5.00	10.00
4P	7.50	12.50
5P	10.00	15.00
6P	12.50	17.50
7P	15.00	20.00
8P	17.50	22.50
9P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
20P	47.50	52.50

序号	名称	材料	电镀(锡): 整个表面镀底镍 30U"MIN 再镀锡80U" MIN				
1	端子/Contact	黄铜					
2	基座/Wafer	LCP/PA66 (UL94V-0)	白色				
MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT		 联晟欣连接器(深圳)有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd					
UNLESS OTHERWISE SPECIFIED, TOLERANCE:		DESIGN	Andy	DATE	2014.12.24	TITLE:	
X.	±0.20	CHECKED		DATE		WAFER XH 2.54直针	
X.x	±0.10	APPROVED		DATE			
X.xx	±0.05	PART NO: LCK-WF-A254Z-NA			REV: 04	SCALE: 1:1	UNIT: mm
ANGULAR	±3°	DRAWING NO: XH254Z-NA			SIZE: A4	SHEET: 1/1	

RoHS Compliant

LCK-WF-A254WZ-NA

连晟欣

LCK

产品类别

WF:WAFER针座

产品间距

XH 2.54直针: A254Z

XH 2.54弯针: A254WZ

PIN位

2A:2PIN

.....

15A:15P

TABLE:

CSG PART NO.	PIN	Dimension mm	
		A	B
2A	2P	2.50	7.50
3A	3P	5.00	10.00
4A	4P	7.50	12.50
5A	5P	10.00	15.00
6A	6P	12.50	17.50
7A	7P	15.00	20.00
8A	8P	17.50	22.50
9A	9P	20.00	25.00
10A	10P	22.50	27.50
11A	11P	25.00	30.00
12A	12P	27.50	32.50
20A	20P	47.50	52.50

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Wafer Nylon66,UL94V-0
PIN Brass Tin-plated

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

序号	名称	材料	电镀（锡）：整个表面镀底镍 30U”MIN 再镀锡80U” MIN				
1	端子/Contact	黄铜					
2	基座/Wafer	LCP/PA66（UL94V-0）	白色				
MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT		联晟欣连接器（深圳）有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd					
UNLESS OTHERWISE SPECIFIED,TOLERANCE:		DESIGN	Andy	DATE	2014.12.24	TITLE:	
X. ±0.20		CHECKED		DATE		WAFER XH 2.54 弯针	
X.x ±0.10		APPROVED		DATE			
X.xx ±0.05		PART NO: LCK-WF-A254WZ-NA			REV: 04	SCALE: 1:1	UNIT: mm
ANGULAR ±3°		DRAWING NO: XH254WZ-NA			SIZE: A4	SHEET: 1/1	