


DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1864	A	RELEASED	JWM	3/14/03	JN	03/19/08	JN	03/19/08
1864	B	RoHS Added	DCM	1/24/06	Jn	03/19/08	Jn	03/19/08


 RoHS  
Compliant

## Mounting Hole

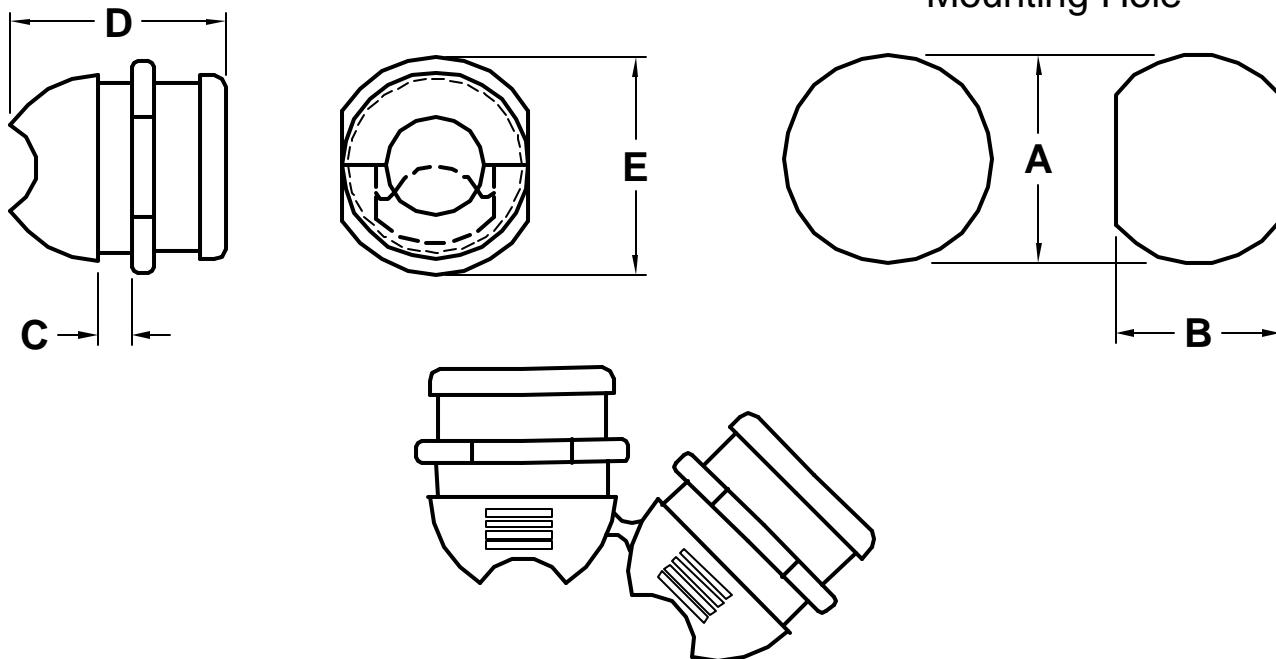

SPC Type No.	Cross Section	Cable Size	Cable Type	Gauge (AWG)	Mounting Hole		Bushing		
					A (Diameter)	B (Flats)	C (Max. Panel Thickness)	D (Length)	E (Width)
2462	Flat	.150 x .280	HPN	18/2	0.5	.465	0.1	0.55	0.505
				16/2					
2463	Flat	.150 x .280	SPT	18/2	0.5	.465	0.1	0.58	0.51
				16/2					
2464	Flat	.150 x .280	HPN	18/2	0.5	.465	.062	0.55	0.505
2465	Flat	.150 x .280	SPT	18/2	0.5	.465	.062	0.57	0.5
		.160 x .300		16/2					
2466	Round	.300	SJT	16/3	.625	0.55	.062	0.74	0.64
		.355	SJ	16/3					
		.405	SJT	18/3					

SPC-F004.DWG

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE: Strain Relief Bushings, "EZ" Type, Nylon			
	Jeff McVicker	3/14/03				
	CHECKED BY:	DATE:				
	Jason Nash	03/19/08	SIZE	DWG. NO.	ELECTRONIC FILE TA-447.dwg	
	APPROVED BY:	DATE:	A	TA-447		
	Jason Nash	03/19/08	SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.