

RoHS Compliant

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer PA66, Beige UL94V-0
PIN Brass Tin-plated


TABLE:

CSG PART NO.	尺寸(mm)		
	A	B	C
2A	2.50	7.50	3.50
3A	5.00	10.00	6.00
4A	7.50	12.50	8.50
5A	10.00	15.00	9.00
6A	12.50	17.50	11.50
7A	15.00	20.00	14.00
8A	17.50	22.50	16.50
9A	20.00	25.00	19.00
10A	22.50	27.50	21.50
11A	25.00	30.00	24.00
12A	27.50	32.50	26.50
15A	35.00	40.00	34.00

LCK-WF-C254Z-NA

连晟欣
LCK
产品类别
WF: WAFER针座
产品间距
XHS 2.54直针: C254Z
XHS 2.54弯针: C254WZ

PIN位
2A: 2PIN
.....
15A: 15P


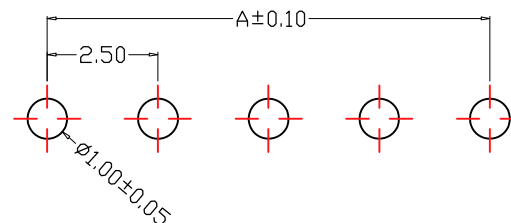


PCB LAYOUT

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)
UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.20
X.X ±0.10
X.XX ±0.05
ANGULAR ±3°


 联晟欣连接器（深圳）有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd				TITLE: WAFER XHS 2.54直针	
DESIGN	Andy	DATE	2014.12.24	REV: 04	
CHECKED		DATE		SCALE: 1:1	
APPROVED		DATE		UNIT: mm	
PART NO: LCK-WF-C254Z-NA				SIZE: A4	
DRAWING NO: XHB254Z-NA				SHEET: 1/1	

RoHS Compliant

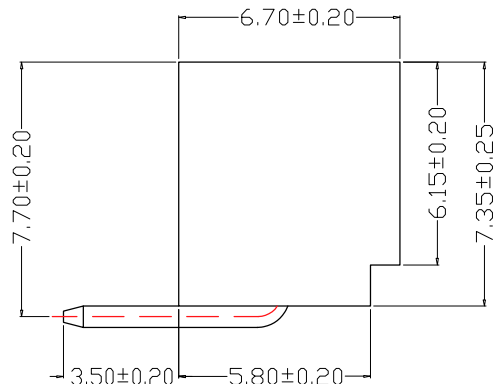
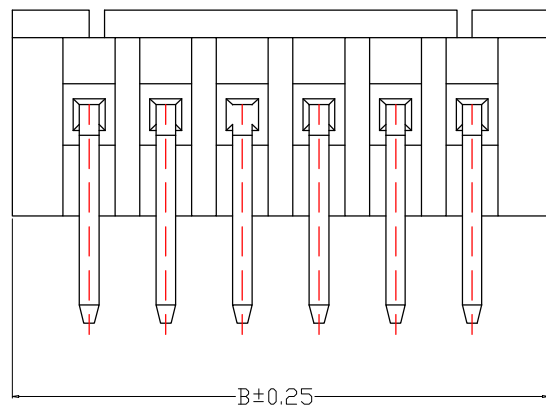


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer PA66, Beige UL94V-0
PIN Brass Tin-plated

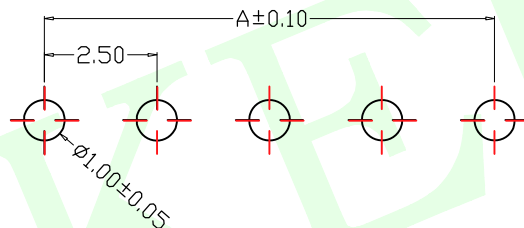

PCB LAYOUT

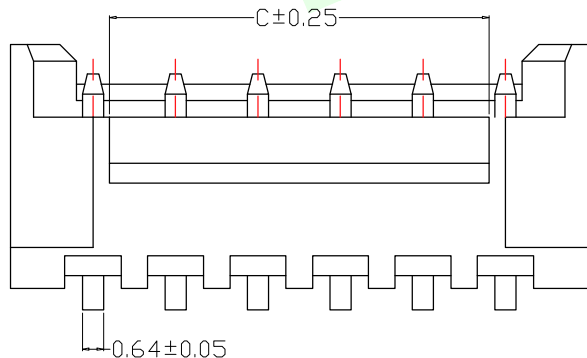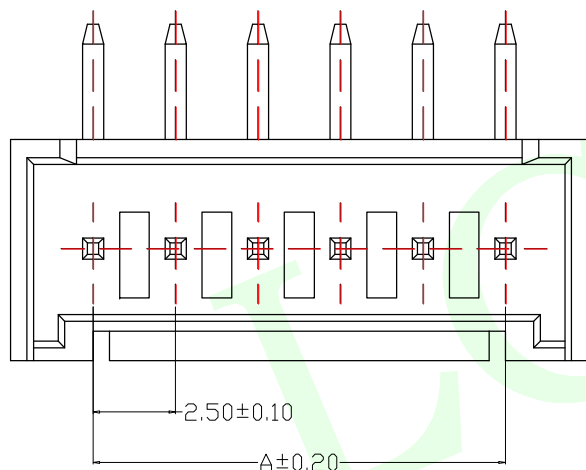

LCK-WF-C254WZ-NA

连晟欣
LCK

产品类别

WF: WAFER 针座

产品间距

XHS 2.54 直针: C254Z


XHS 2.54 弯针: C254WZ

PIN 位

2A: 2PIN

.....

15A: 15P

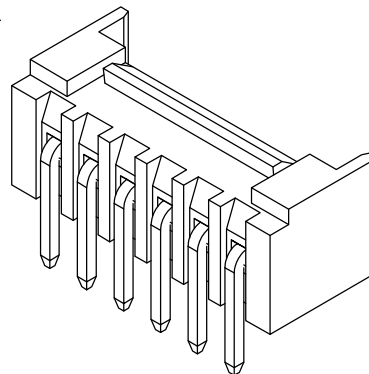

尺寸 (mm)

	A	B	C
2A	2.50	7.50	3.50
3A	5.00	10.00	6.00
4A	7.50	12.50	8.50
5A	10.00	15.00	9.00
6A	12.50	17.50	11.50
7A	15.00	20.00	14.00
8A	17.50	22.50	16.50
9A	20.00	25.00	19.00
10A	22.50	27.50	21.50
11A	25.00	30.00	24.00
12A	27.50	32.50	26.50
15A	35.00	40.00	34.00

MEASURE POINT:

QUADRANT POINT

TANGENCY POINT

INTERSECTION POINT

QP

TP

IP

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ±0.20

X.x ±0.10

X.xx ±0.05

ANGULAR ±3°



联晟欣连接器 (深圳) 有限公司

Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	WAFER XHS 2.54 弯针		
CHECKED		DATE					
APPROVED		DATE					
PART NO:	LCK-WF-C254WZ-NA			REV:	04	SCALE:	1:1
DRAWING NO:	XHB254WZ-NA			UNIT:	mm		
				SIZE:	A4	SHEET:	1/1