
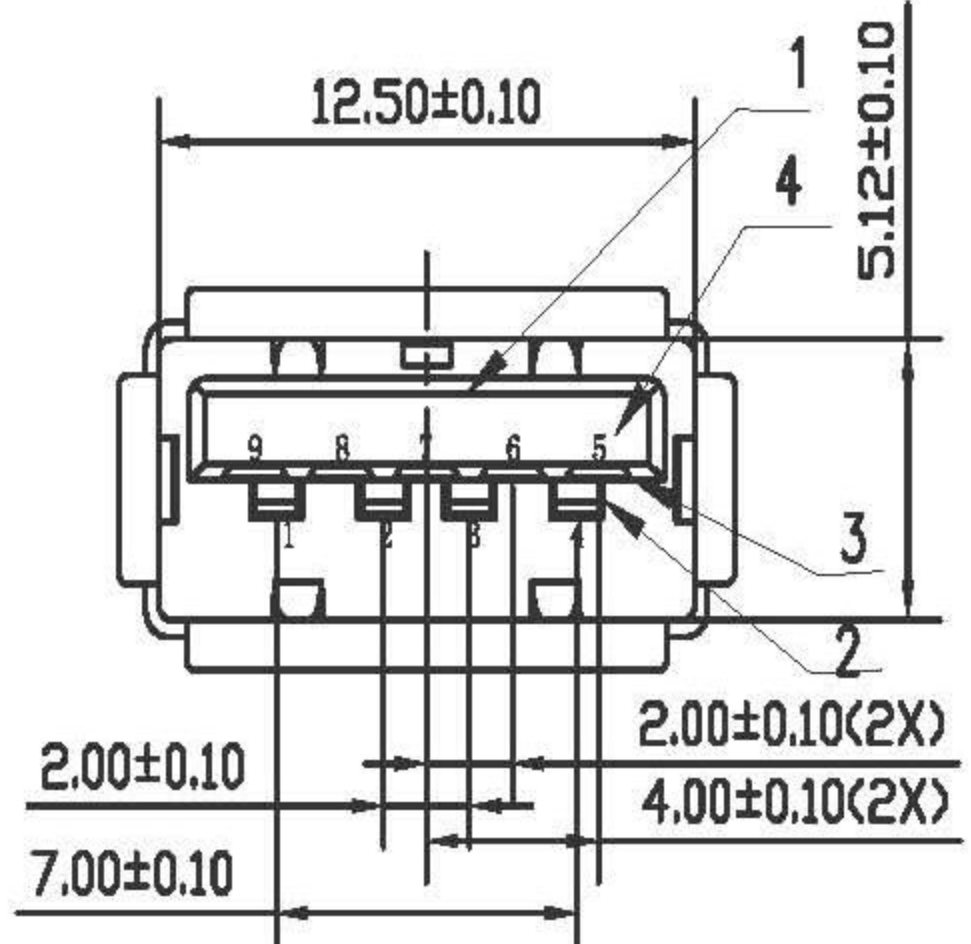
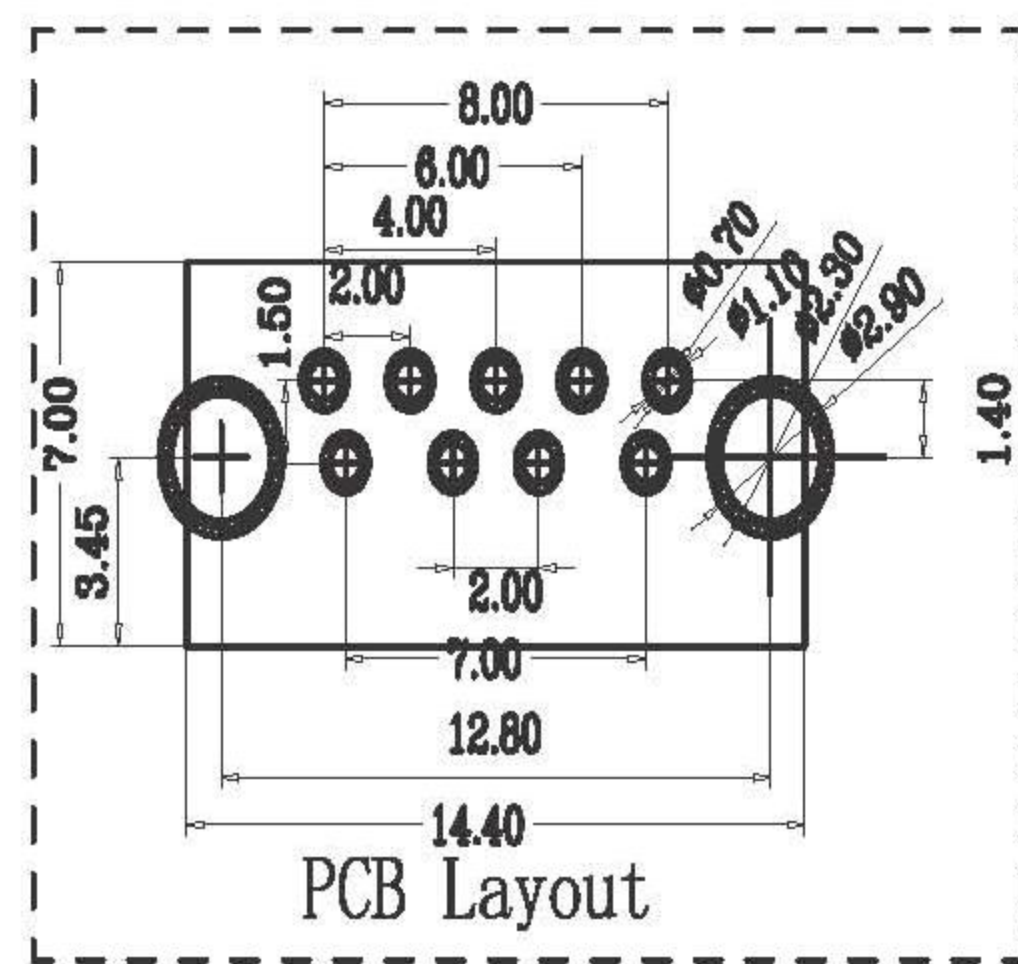


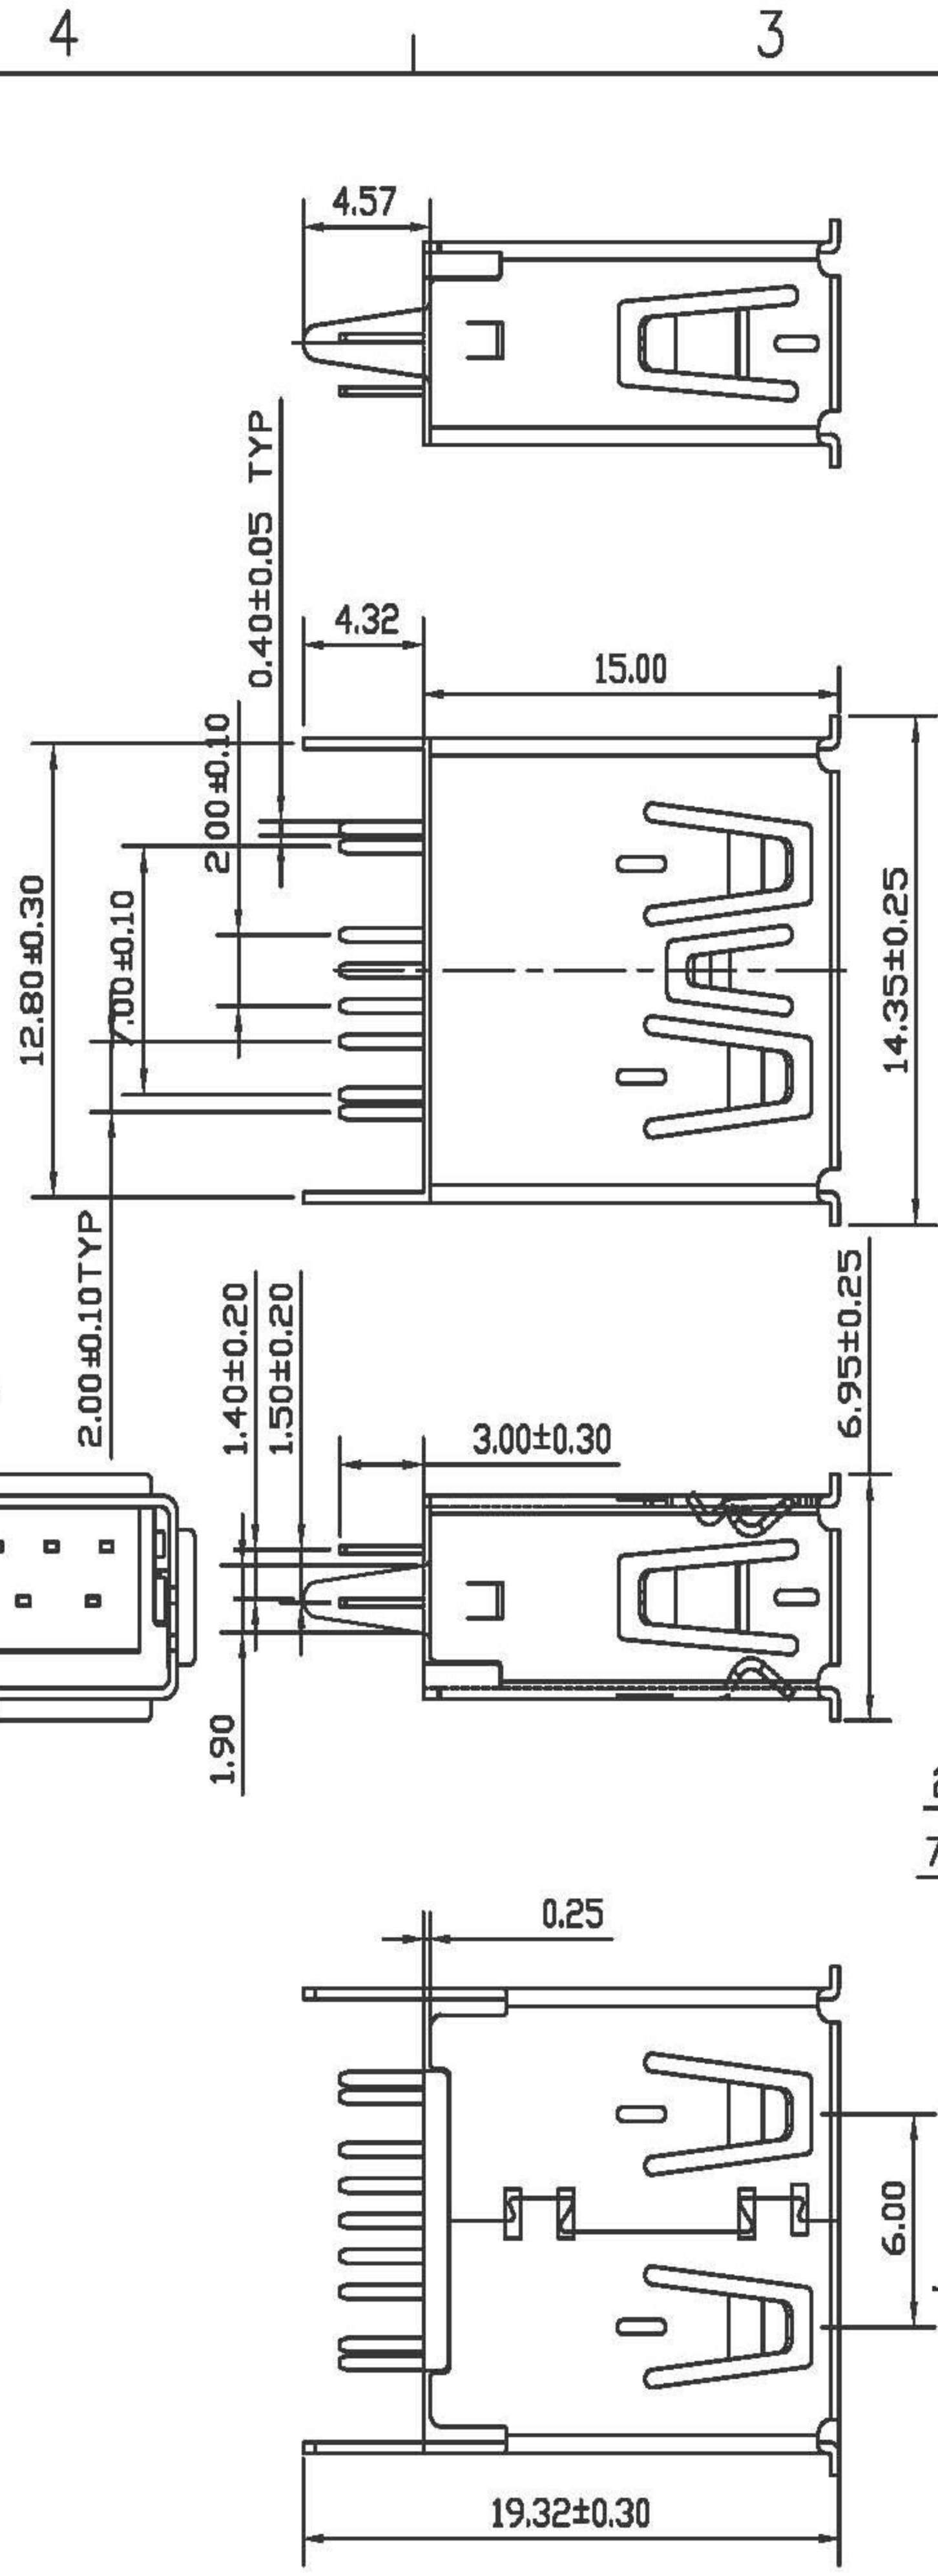

SPECIFICATIONS:

Contact current Rating:
1.8 Amperes for pin1&pin4.
0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)
Insulation resistance:100Megohms Minimum.

Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts

Mechanical Characteristics:
Mating Force:35 Newtoms.Maximum
Unmating Force:10 Newtoms.Minimum.

MATERIAL: 8N Min After Durability
Housing: PBT+30%GF 94V-0 COLOR:BLUE
Contact: copper alloy(T=0.25mm)
Shell: Brass

PLATING:
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all
Shell: Nickel Plated

operating Temperature:-55°to+85°

L&X 深圳市连欣科技有限公司						
TEL: 0755-33978030 FAX: 0755-32937438						
单位(units)	MM	设计(draw)	邓辉剑	材料 (mt'l)	图名(name)	USB AF 3.0 180° 插板直脚
比例(scale)	1 : 1	审核(ch'k)		UNIT:mm .xx +/-0.25, xxx +/-0.13		
版次(rev.)	A / 1	核准(app'd)		HOUSING	料号(Part number)	XUSF-1803-0523
视图(view)		日期(date)	2011.08.12	PIN	图档(File Name)	E:\工程图