

# TDS:EMIC

## 拓電半導體

自主封測 品質把控 售後保障


WEB | [WWW.TDSEMIC.COM](http://WWW.TDSEMIC.COM)




電源管理




顯示驅動




二三極管



LDO穩壓器




觸摸芯片



MOS管




運算放大器



存儲芯片



MCU



串口通信

# SS54F

產品規格說明書

## SS52F THRU SS520F

Surface Mount Schottky Barrier Rectifier  
 Reverse Voltage - 20 to 200V  
 Forward Current - 5.0A

### FEATURES

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

### MECHANICAL DATA

- Case: SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 27mg / 0.00095oz

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



### Absolute Maximum Ratings and Electrical characteristics


Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	SS52F	SS54F	SS56F	SS58F	SS510F	SS512F	SS515F	SS520F	Units	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	20	40	60	80	100	120	150	200	V	
Maximum RMS voltage	$V_{RMS}$	14	28	42	56	70	84	105	140	V	
Maximum DC Blocking Voltage	$V_{DC}$	20	40	60	80	100	120	150	200	V	
Maximum Average Forward Rectified Current	$I_{F(AV)}$	5.0								A	
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	150								A	
Max Instantaneous Forward Voltage at 5 A	$V_F$	0.45	0.55	0.70		0.85			V		
Maximum DC Reverse Current at Rated DC Reverse Voltage	$I_R$					1.0 50					mA
Typical Junction Capacitance <sup>1)</sup>	$C_j$	800		500						pF	
Typical Thermal Resistance <sup>2)</sup>	$R_{\theta JA}$	45								°C/W	
Operating Junction Temperature Range	$T_j$	-55 ~ +125								°C	
Storage Temperature Range	$T_{stg}$	-55 ~ +150								°C	

1) Measured at 1MHz and applied reverse voltage of 4 V D.C.

2) P.C.B. mounted with 0.5 X 0.5" (12.7 X 12.7 mm) copper pad areas.

## SS52F THRU SS520F

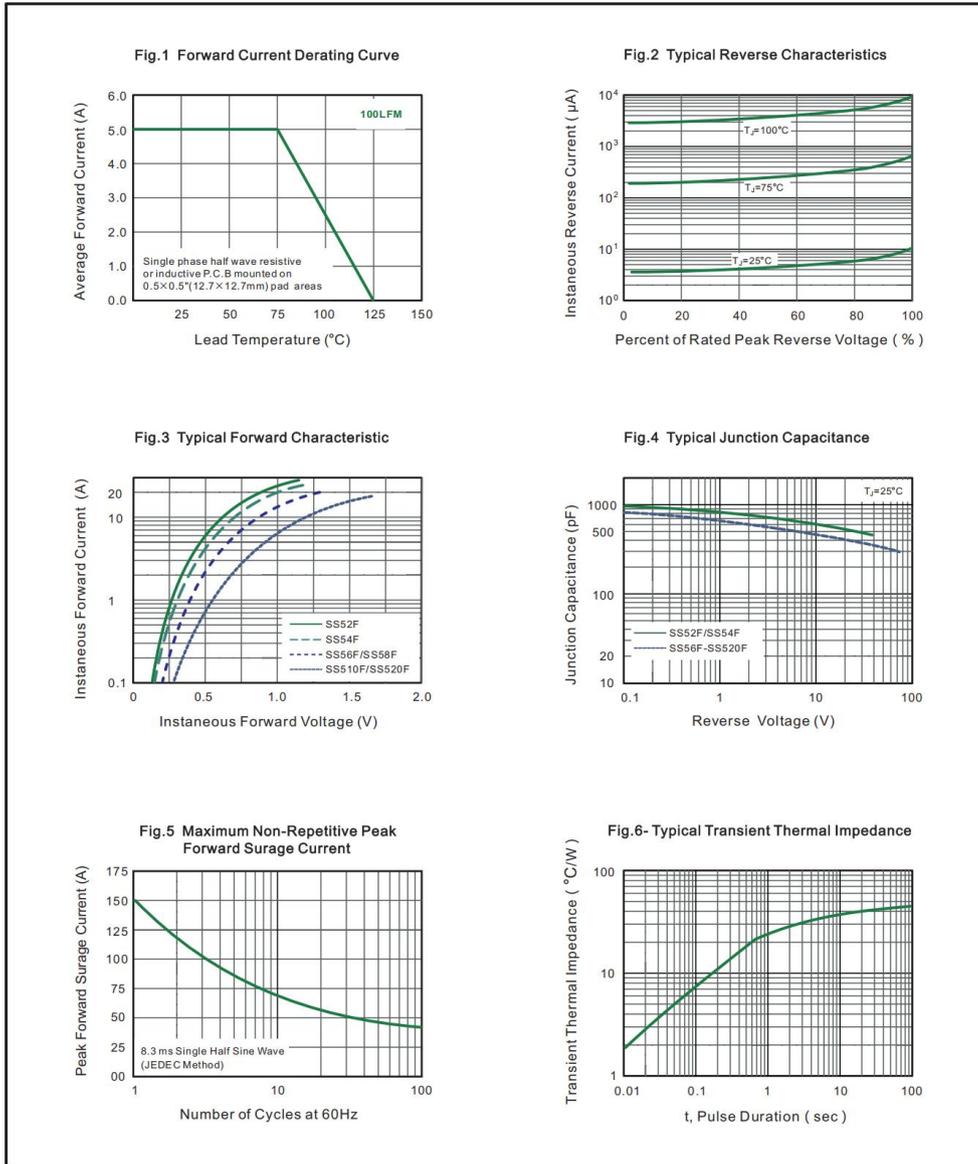


## SS52F THRU SS520F


### PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SMAF

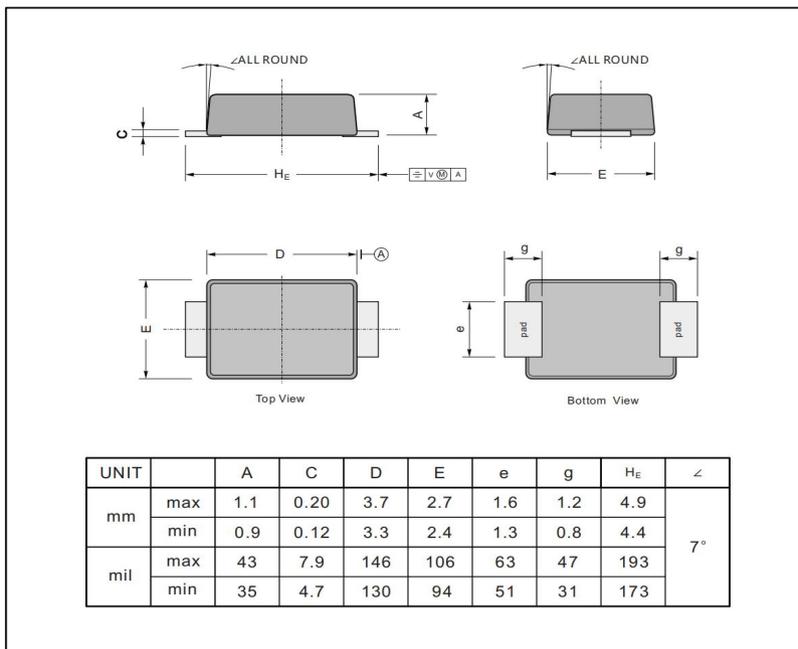

### The recommended mounting pad size

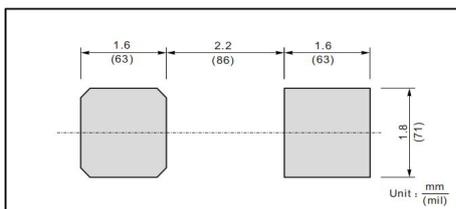

### Marking

Type number	Marking code
SS52F	SS52
SS54F	SS54
SS56F	SS56
SS58F	SS58
SS510F	SS510
SS512F	SS512
SS515F	SS515
SS520F	SS520