
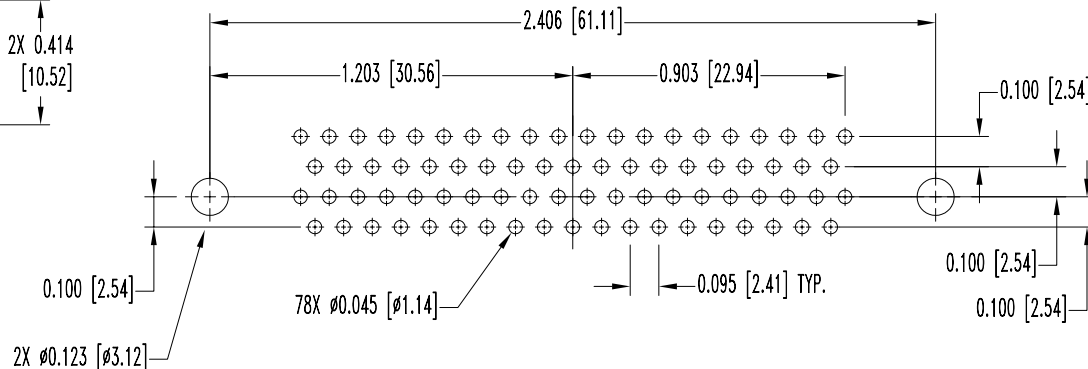
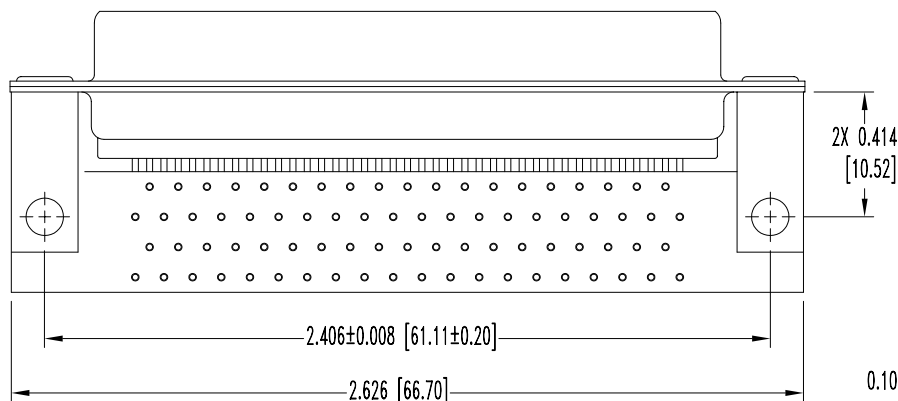
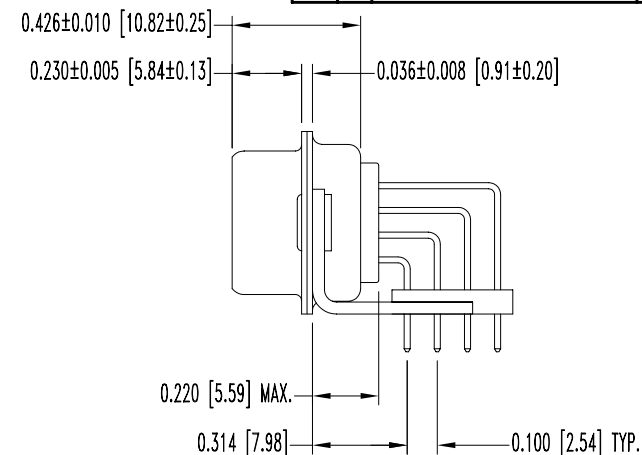


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK8575

DATE	REV	REVISION RECORD	APP	DR	CK
5-18-07	NC	ECO 27921		YK	

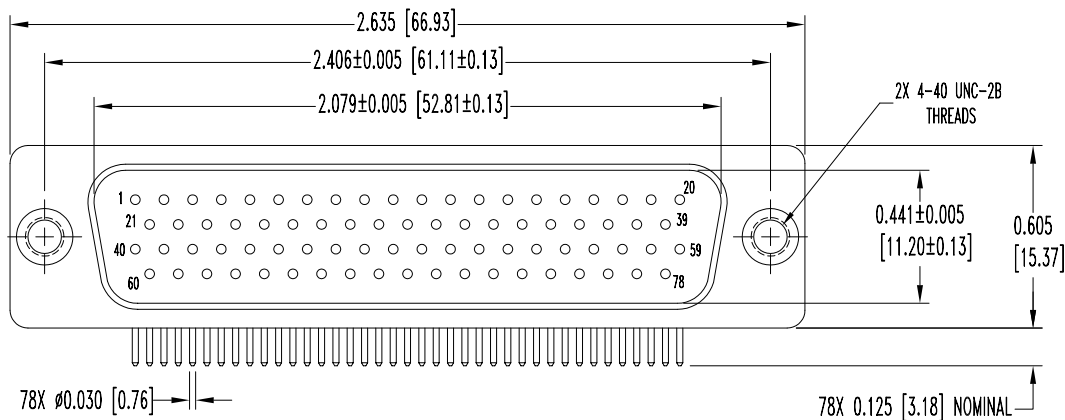

CONTACT HOLE PATTERN

NOTES:

1. MATERIAL AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLACK COLOR.

CONTACTS: PRECISION MACHINED BRASS ALLOY, GOLD FLASH OVER NICKEL FINISH.

SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

ANGLE BRACKETS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

RIVETS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

ALIGNMENT BAR: GLASS FILLED NYLON, BLACK COLOR.

2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 5 AMPERES NOMINAL.


INITIAL CONTACT RESISTANCE: 0.010 OHMS MAXIMUM.

INSULATOR RESISTANCE: 5 G OHMS.

WORKING VOLTAGE: 300 V r.m.s.

3. TEMPERATURE RANGE: -55°C TO +125°C.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198	
 DECIMAL TOL. ± 0.015 [0.38]	ODD SERIES TITLE ODD78M4R7000	SCALE N.T.S.	DRAWN BY YK
DATE 5-18-07	DRAWING NUMBER SK8575	REV. NC	APPROVED BY