

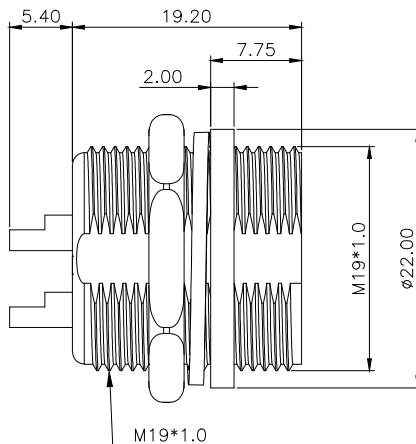


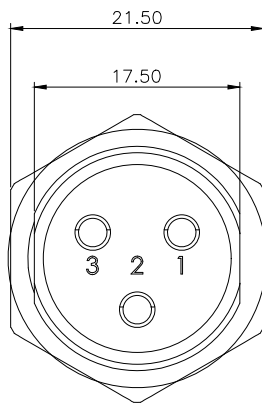

Specifications

Coupling: Threaded coupling
Shell material: Brass with Nickel Plate
Insert material: bakelite
Contact material: copper Silver Plate/Nickel
Termination: Solder
Mating cycle: 500
Cable diameter: -20°C +85°C

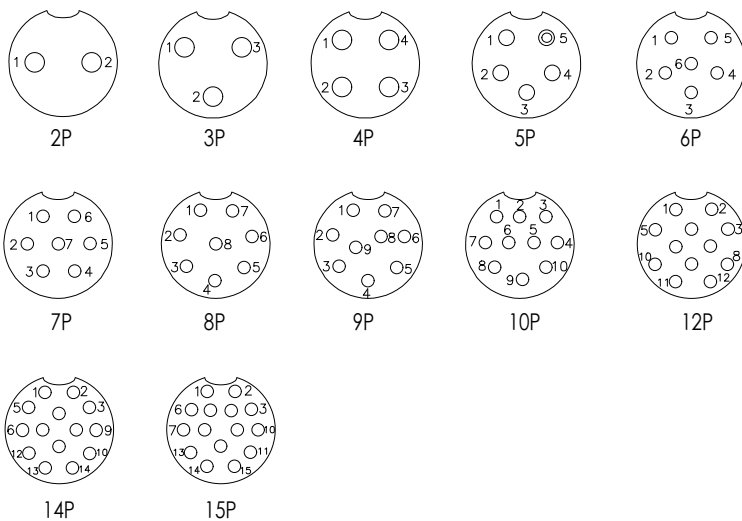

Ordering Information

HC-GX20 - NP - *

No. of Pin
2/10 Pin
12/14/15 Pin

Contact
Type
F-Female
M-Male

NO. of contacts	芯数	2	3	4	5	6	7	8	9	10	12	14	15
Rated current (A)	额定电流	15A	15A	10A	10A	10A	10A	10A	10A	5A	5A	5A	5A
Operation limit voltage (AC.V.rms) 工作电压 (AC.V) 分钟		250V	250V	200V	200V	200V	200V	200V	200V	200V	200V	200V	200V
Withstanding voltage (AC.V.rms) 1 minute 耐电压		1500	1500	1500	1000	1000	1000	1000	1000	1000	1000	1000	1000
Insulation resistance (mΩ)	绝缘阻抗	1500	1500	1500	1000	1000	1000	1000	1000	1000	1000	1000	1000
Contact resistance (mΩ)	接触阻抗	3	3	3	3	3	3	3	3	3	3	3	3

			GENERAL TOLERANCE	制 图		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审 核					
			X.X ±0.30	批 准		产品名称	GX20 航空插头 母头	版本	A
			X.XX ±0.10	APPROVAL		TITLE		REV.	
1	初版发行		X.XXX ±0.10	比 例		产品料号	HC-GX20-NP-F	单位	mm
			SCALE			PART NO.		UNITS	
序号	变更内容	日期	Angle ±3.0°	投 影	Projection	材料		页 次	1/1
No.	MODIFY CONTENT	MODIFY DATE				MATERIAL		SHEET	