
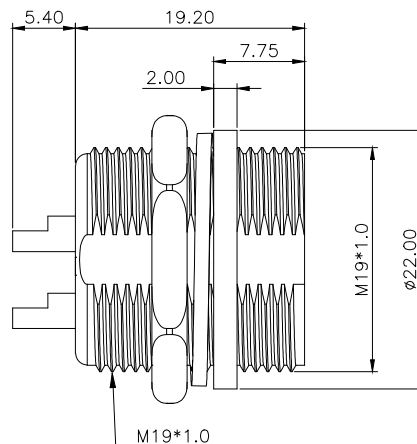


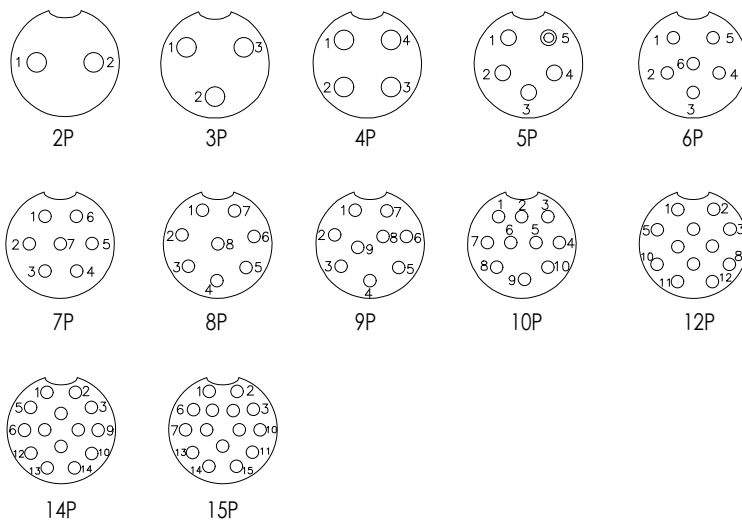

Coupling:	Threaded coupling
Shell material:	Brass with Nickel Plate
Insert material:	bakelite
Contact material:	copper Silver Plate/Nickel
Termination:	Solder
Mating cycle:	500
Cable diameter:	-20°C +85°C

HC-GX20 - NP - *

No. of Pin	Conta
2~10 Pin	Type
12/14/15 Pin	F-Fema

[illegible]

			GENERAL TOLERANCE	制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK				
			X. X ± 0.30	批 准 APPROVAL	产品名称 TITLE	GX20 航空插头 母头	版 本 REV.	A
1	初版发行		X. XX ± 0.20	比 例 SCALE	产品料号 PART NO.	HC-GX20-NP-F	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	X. XXX ± 0.10	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1
			Angle ± 3.0°					