
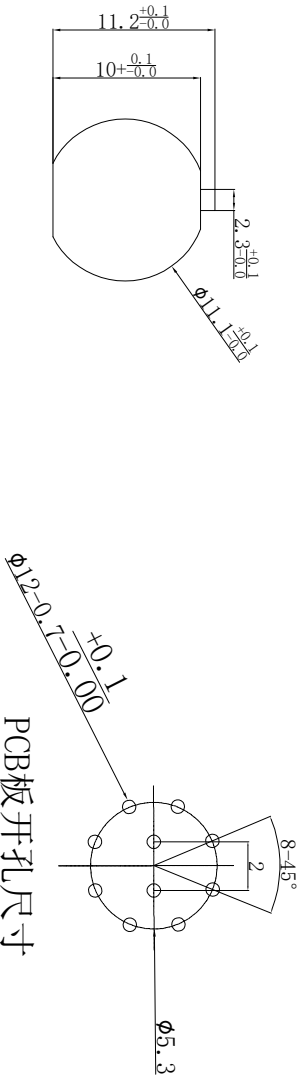


1. FIGURE AND DIMENSIONS (视图及尺寸)

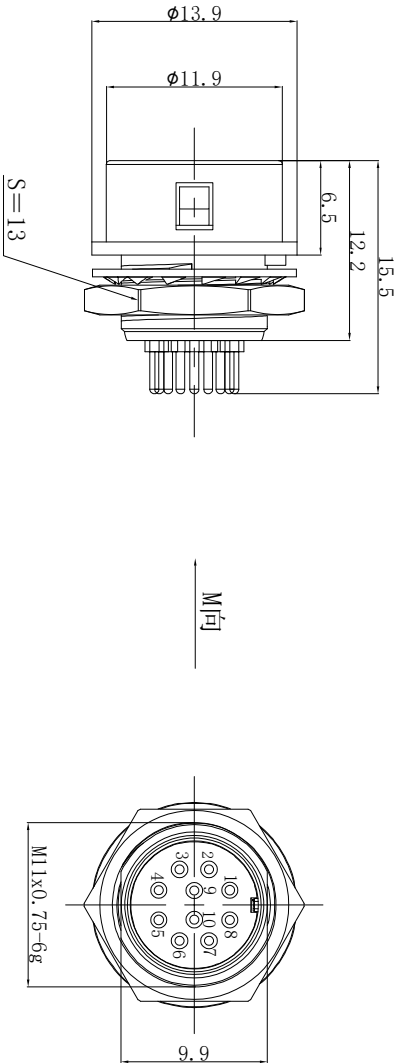


面板开孔尺寸

PCB板开孔尺寸
A-A (比例: 1: 1)

Main technical indicators (主要技术指标)	
1.Mating (插拔次数)	1000
2. Working Temperature (温度)	-55~+150 °C
3. IP Rating (防护级别)	IP 44
4. Diameter of socket end(折合端直径)	$\phi 0.6$
5. Testing Voltage (测试电压)	100V
7. Rated Current (额定电流)	2A
8. Shell material (壳体材质)	Zinc alloy nickel plated/锌合金镀亚镍
9. Pin Material (插针材料)	Copper alloy gold plating(铜合金镀金)

Sum up (总结)	
Series (系列)	XKB10
Shell style/model (外壳样式/型号)	10R:Fixed receptacle, panel mount type/固定式插座, 面板安装型
Button (按键)	5 button(5个按键)
Termination type (终止类型)	Motherboard headers (motherboard 接)
Line diameter awg(线材直径)	-
Cable diameter ϕ (电缆直径)	-
Match plug(匹配插头)	XKB10A, 10P, 10A

版本		TITLE		DRAWING NO.		REV.	
REVA4		XKB10A. 10R插座10芯 正装		XKB10A-10R-10LN		AO	
REVA3							
REVA2							
REVA1							
DRAW	DATE	PART NO.		UNIT	mm		
CHECK	DATE			SCALE	Free		
APPR'D	DATE			SHEET	10F N		
USE				XKB INDUSTRIAL PRECISION CO., LIMITED			