



Features

- Epitaxial planar die construction
- Complementary PNP Type available(MMST2907AW)



SOT-323



Equivalent Circuit


Absolute Maximum Ratings($T_A=25^{\circ}\text{C}$)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	75	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current	0.6	A
P_C	Collector Power Dissipation	200	mW
T_J, T_{stg}	Operation Junction And Storage Temperature Range	$-55 \sim +150$	$^{\circ}\text{C}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=10\mu\text{A}, I_E=0$	75			V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=10\text{mA}, I_B=0$	40			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=10\mu\text{A}, I_C=0$	6			V
I_{CBO}	Collector cut-off current	$V_{CB}=70\text{V}, I_E=0$			100	nA
I_{CEO}	Collector cut-off current	$V_{CE}=35\text{V}, I_B=0$			100	nA
I_{EBO}	Emitter cut-off current	$V_{EB}=3\text{V}, I_C=0$			100	nA
$h_{FE(1)}$	DC current gain	$V_{CE}=10\text{V}, I_C=0.1\text{mA}$	35			
$h_{FE(2)}$		$V_{CE}=10\text{V}, I_C=1\text{mA}$	50			
$h_{FE(3)}$		$V_{CE}=10\text{V}, I_C=10\text{mA}$	75			
$h_{FE(4)}$		$V_{CE}=10\text{V}, I_C=150\text{mA}$	100		300	
$h_{FE(5)}$		$V_{CE}=10\text{V}, I_C=500\text{mA}$	40			
$h_{FE(6)}$		$V_{CE}=1\text{V}, I_C=150\text{mA}$	35			
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=500\text{mA}, I_B=50\text{mA}$			1	V
		$I_C=150\text{mA}, I_B=15\text{mA}$			0.3	V
$V_{BE(sat)}$	Collector-emitter saturation voltage	$I_C=500\text{mA}, I_B=50\text{mA}$			2.0	V
		$I_C=150\text{mA}, I_B=15\text{mA}$			1.2	V
f_T	Transition frequency	$V_{CE}=20\text{V}, I_C=20\text{mA}, f=100\text{MHz}$	300			MHz
C_{ob}	Collector output capacitance	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$			8	pF
t_d	Delay time	$V_{CC}=30\text{V}, V_{BE(off)}=-0.5\text{V}$ $I_C=150\text{mA}, I_{B1}=15\text{mA}$			10	ns
t_r	Rise time				25	ns
t_s	Storage time	$V_{CC}=30\text{V}, I_C=150\text{mA}$ $I_{B1}=-I_{B2}=15\text{mA}$			225	ns
t_f	Fall time				60	ns

Ordering information

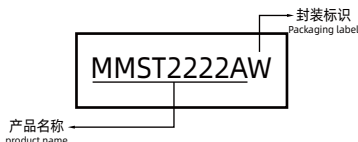Product ID	Pack	Naming rule	Marking	$h_{FE(1)}$	Qty(PCS)
MMST2222AW	SOT-323		K3P	100-300	3000











TWTLSEMI

TL-MMST2222AW

SOT-323 Plastic-Encapsulate Transistors (NPN)


Typical Characteristics

Static Characteristic

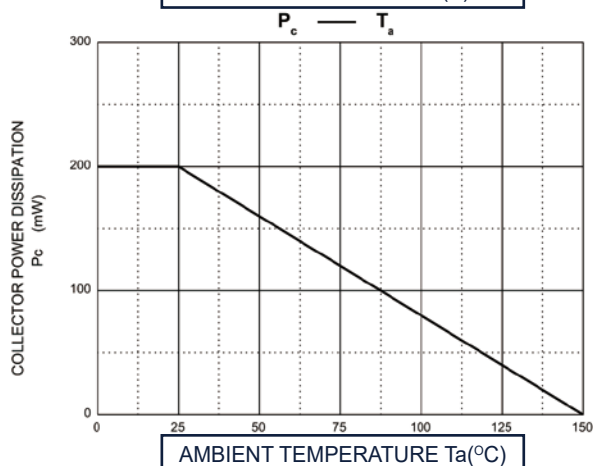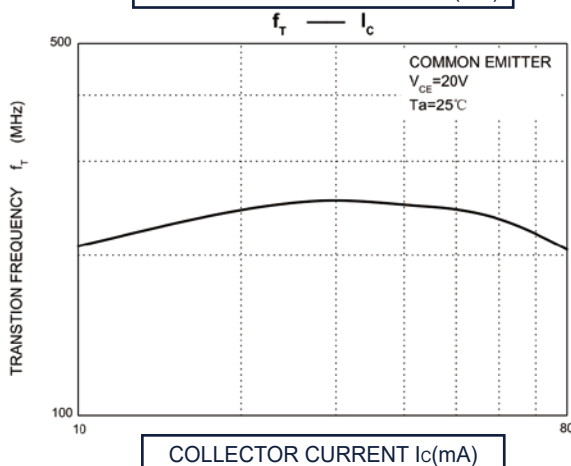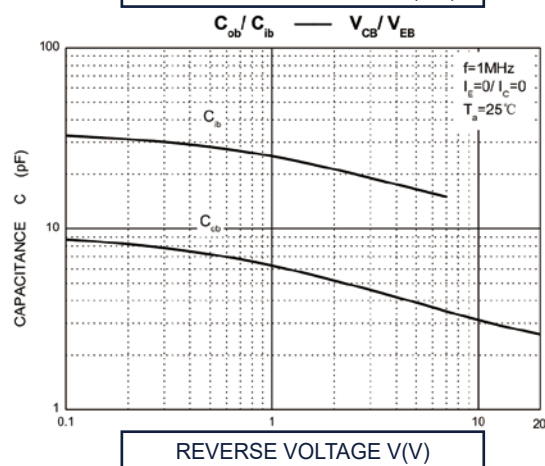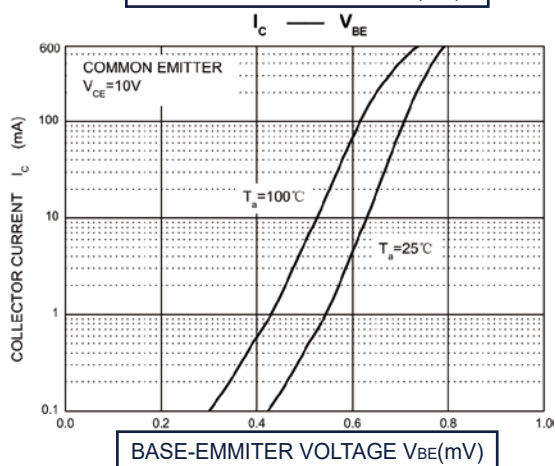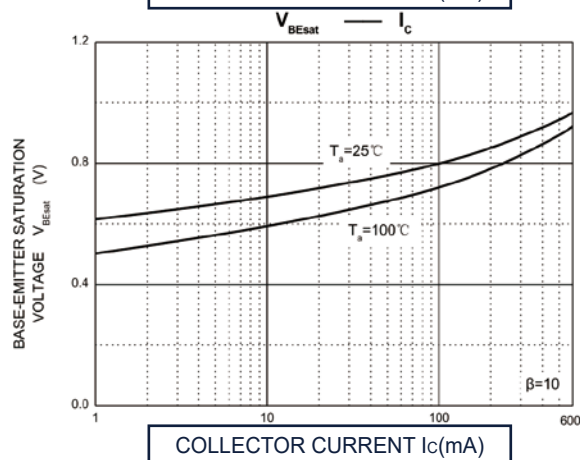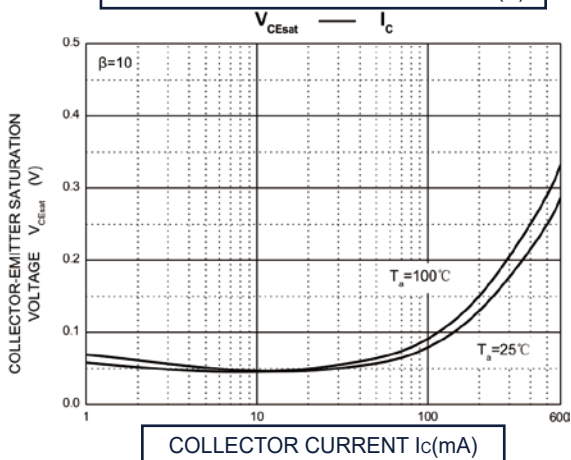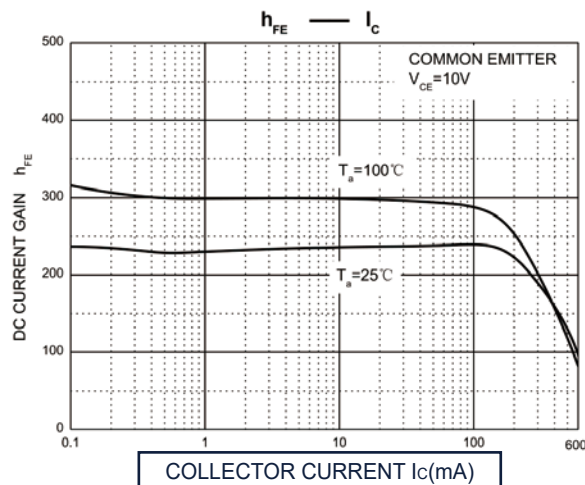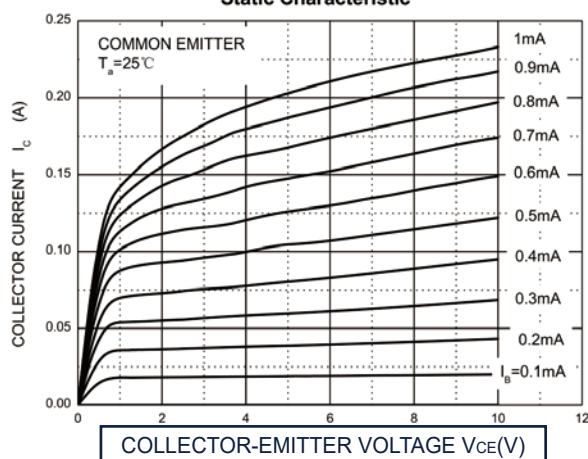



SOT-323 Package Outline Dimensions

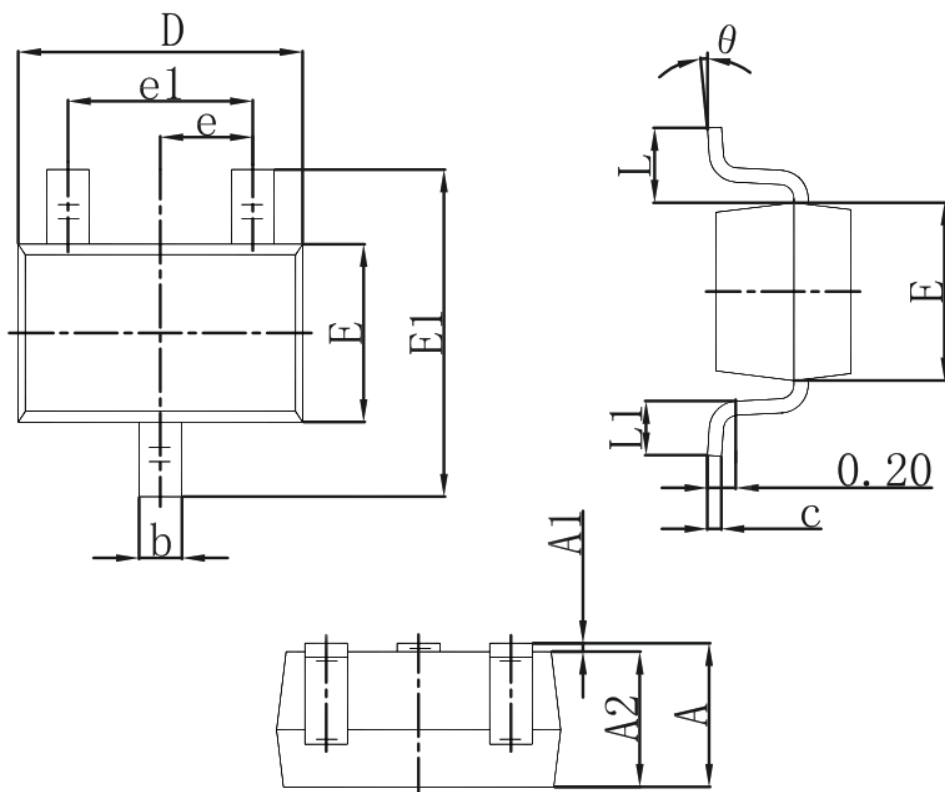

Symbol	Dimensions in Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	1.350	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°