

General description

The ESD5Z15CS is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time , make these parts ideal for ESD protection on designs where board space is at a premium.

Features and benefits

- Bidirectional ESD protection of one line
- Reverse stand-off voltage: 15.0V Max
- Low Capacitance 15 pF(Typ)
- Low leakage current: nA Level
- Response time is typically < 1 ns
- IEC61000-4-2 Level 4 ESD Protection
- RoHS compliant



SOD523



Application information

- Cell phones
- Audio equipment
- Portable devices
- Digital cameras
- Power supplies

Ordering information

Device	Package	Reel Size	Qty(PCS)
ESD5Z15CS	SOD523	7 Inch	3000

Ordering information



Marking	Naming rule	Graphic symbol
15D	 The diagram shows the breakdown of the part number ESD5Z15CS: - ESD: 封装体积 (Package volume) 5Z: 版本标识 (Version identification) 15: 产品名称 (Product name) - CS: 电压 (Voltage) - 双向 (two-way): 双向 (two-way)	 The graphic symbol shows a diode symbol with two arrows pointing in opposite directions, indicating bidirectional protection. The terminals are labeled 1 and 2.

Maximum Ratings ($T_A = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PPM}	135	W
Peak Pulse Current ($t_p = 8/20\mu\text{s}$)	I_{PPM}	5	A
Maximum lead temperature for soldering during 10s	T_L	260	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$
Operating Temperature Range	T_{OP}	-40 to +125	$^\circ\text{C}$
Maximum junction temperature	T_j	150	$^\circ\text{C}$
ESD voltage IEC 61000-4-2 (air discharge)	V_{ESD}	20	kV
ESD voltage IEC 61000-4-2 (contact discharge)	V_{ESD}	20	kV


Electrical Characteristics ($T_A = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Reverse Working Voltage	V_{RWM}	--	--	15.0	V	
Breakdown Voltage	V_{BR}	17.0	--	20.0	V	$I_T = 1\text{mA}$
Leakage Current I_{Leak}	I_R	--	--	100	nA	$V_{RWM} = 15\text{V}$
Clamping Voltage	V_C	--	25.0	27.0	V	$I_{PP} = 5\text{A}, t_p = 8/20\mu\text{s}$
Junction Capacitance	C_J	--	15.0	18.0	pF	$V_R = 0\text{V}, f = 1\text{MHz}$

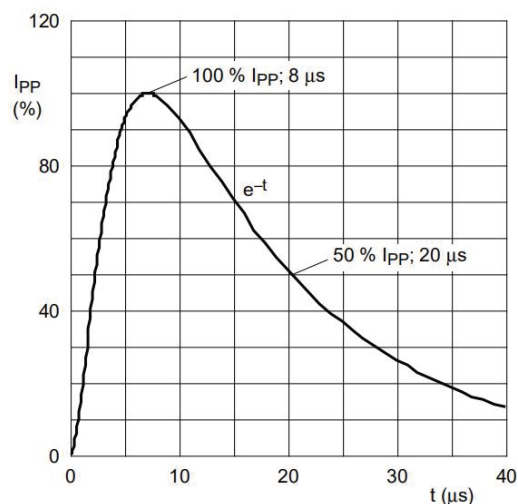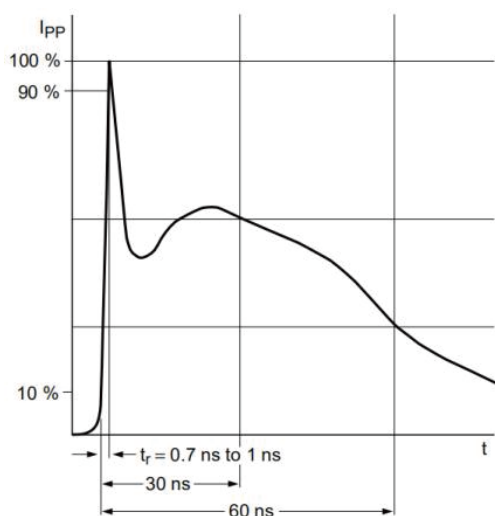

Package Outline Dimensions

SOD523

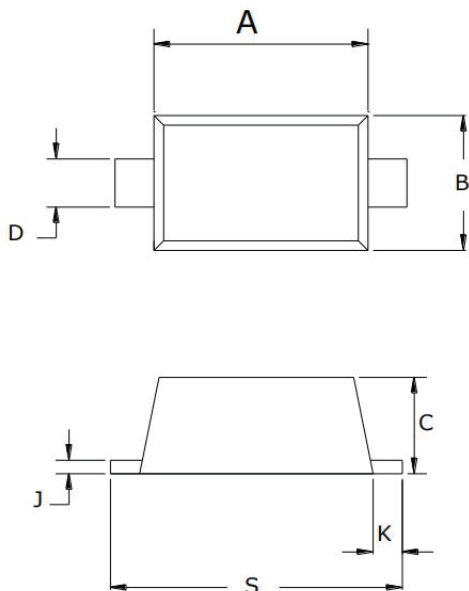

SYMBOL	MILLIMETERS	
	MIN	MAX
A	1.10	1.30
B	0.70	0.90
C	0.50	0.70
D	0.25	0.35
J	0.07	0.20
K	0.15	0.25
S	1.50	1.70

Soldering Footprint (mm)

