

SMD Aluminum Electrolytic Capacitors

AEF Series



FEATURES

- Endurance, 105°C, 6000 hours
- Designed for surface mounting on high density PC board
- RoHS Compliance and Halogen-free

APPLICATIONS

- Industrial
- Consumer electronics
- Lighting
- DC/DC converters






HOW TO ORDER

A	EF	0608	330	M	035	R	-
Product Type Aluminum	Series Type	Case Size See table below	Capacitance Code µF code: 1st two digits represent significant figures, 3rd digit represents multiplier (number of zeros to follow)	Tolerance M = ±20%	Rated DC Voltage 006 = 6.3Vdc 010 = 10Vdc 016 = 16Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc 063 = 63Vdc 080 = 80Vdc 100 = 100Vdc 160 = 160Vdc 200 = 200Vdc 250 = 250Vdc 400 = 400Vdc	Packaging R = Pure Tin 13" Reel (D ≥ 12.50mm) 15" Reel (D ≤ 10.00mm)	Special No Code = std

CASE DIMENSIONS millimeters (inches)

Code	D±0.50 (0.020)	L±0.50 (0.020)	W±0.20 (0.008)	H±0.20 (0.008)	C±0.20 (0.008)	R	P±0.30 (0.012)	V max	Typical Weight (g)
0608	6.30 (0.248)	8.00 (0.315)	6.60 (0.260)	6.60 (0.260)	7.30 (0.287)	0.50 - 0.80 (0.020 - 0.031)	2.00 (0.080)	0.30 (0.012)	0.41
0610	6.30 (0.248)	10.50 (0.413)	6.60 (0.260)	6.60 (0.260)	7.30 (0.287)	0.50 - 0.80 (0.020 - 0.031)	2.00 (0.080)	0.30 (0.012)	0.90
0810	8.00 (0.315)	10.50 (0.413)	8.30 (0.327)	8.30 (0.327)	9.00 (0.354)	0.70 - 1.10 (0.028 - 0.043)	3.20 (0.126)	0.30 (0.012)	0.90
0812	8.00 (0.315)	12.50 (0.492)	8.30 (0.327)	8.30 (0.327)	9.00 (0.354)	0.70 - 1.10 (0.028 - 0.043)	3.20 (0.126)	0.30 (0.012)	0.90
0813	8.00 (0.315)	13.50 (0.531)	8.30 (0.327)	8.30 (0.327)	9.00 (0.354)	0.70 - 1.10 (0.028 - 0.043)	3.20 (0.126)	0.30 (0.012)	0.90
1010	10.00 (0.394)	10.50 (0.413)	10.30 (0.406)	10.30 (0.406)	11.00 (0.433)	0.70 - 1.30 (0.028 - 0.051)	4.50 (0.177)	0.30 (0.012)	1.40
1012	10.00 (0.394)	12.50 (0.492)	10.30 (0.406)	10.30 (0.406)	11.00 (0.433)	0.70 - 1.30 (0.028 - 0.051)	4.50 (0.177)	0.30 (0.012)	1.58
1013	10.00 (0.394)	13.50 (0.531)	10.30 (0.406)	10.30 (0.406)	11.00 (0.433)	0.70 - 1.30 (0.028 - 0.051)	4.50 (0.177)	0.30 (0.012)	1.63
1016	10.00 (0.394)	16.50 (0.650)	10.30 (0.406)	10.30 (0.406)	11.00 (0.433)	0.70 - 1.30 (0.028 - 0.051)	4.50 (0.177)	0.30 (0.012)	2.00
1213	12.50 (0.492)	13.50 (0.531)	13.00 (0.512)	13.00 (0.512)	13.70 (0.539)	1.00 - 1.40 (0.039 - 0.055)	4.50 (0.177)	0.40 (0.016)	2.90
1216	12.50 (0.492)	16.00 (0.630)	13.00 (0.512)	13.00 (0.512)	13.70 (0.539)	1.00 - 1.40 (0.039 - 0.055)	4.50 (0.177)	0.40 (0.016)	3.20

MARKING

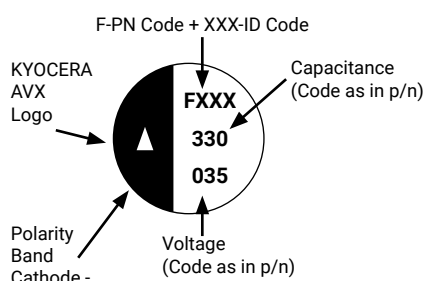

SMD Aluminum Electrolytic Capacitors

AEF Series

TECHNICAL SPECIFICATIONS

Category Temperature Range:	-55°C to +105°C (6.3 - 100V), -40°C to + 105°C (160 - 400V)		
Capacitance Range:	At 25°C, 120Hz	2.2μF to 470μF	
Capacitance Tolerance:	At 25°C, 120Hz	±20%	
Dissipation Factor (%):	Measurement Frequency: 120Hz at 25°C	Please see the Ratings and Part Number Reference Table below	
Leakage Current:	Rated voltage at 25°C*	6.3 - 100V	160 - 400V
		$I \leq 0.03CV$ or $4\mu A$, whichever is greater (2min)	$I \leq 0.04CV + 100\mu A$ (1min)

* Note: In the case of an anomalous reading, re-measure the leakage current after following voltage treatment:
Voltage treatment: DC rated voltage to be applied to the capacitors for 120 minutes at 105°C.

CAPACITANCE AND RATED VOLTAGE RANGE (FIGURES DENOTES CASE SIZE)

Capacitance		Rated Voltage DC (V _R)												
μF	Code	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	160V	200V	250V	400V
2.2	2R2													0610
3.3	3R3													0810
4.7	4R7												0810	0812
5.6	5R6													0812
6.8	6R8													1013
10	100					0608			0608	0608	1010	0810	0812	1013
15	150										0812	0813		1016
22	220					0608	0608	0608	0810	0810			1016	
33	330					0608		0810	0810	1010	1013			
47	470				0608	0608	0810	0810	1010	1010	1016			
100	101	0608			0608	0810	1010	1010	1012	1213				
150	151		0608											
220	221	0608	0810	0810	0810	1010	1213	1213	1216					
330	331	0810	1010	0812	1010		1216							
470	471	0810	1010	1010										

Released ratings

RATINGS & PART NUMBER REFERENCE

Part No.	Case Size	Capacitance (μF)	Rated Voltage (V)	DCL Max. (μA)	DF Max. (%)	ESR Max. @100kHz (Ω)	100kHz RMS Current (mA)	MSL
6.3 Volt								
AEF0608101M006R	0608	100	6.3	18	32	0.75	145	1
AEF0608221M006R	0608	220	6.3	39.6	32	0.75	180	1
AEF0810331M006R	0810	330	6.3	59.4	32	0.36	280	1
AEF0810471M006R	0810	470	6.3	84.6	32	0.36	360	1
10 Volt								
AEF0608151M010R	0608	150	10	45	28	0.75	105	1
AEF0810221M010R	0810	220	10	66	28	0.36	280	1
AEF1010331M010R	1010	330	10	99	28	0.23	400	1
AEF1010471M010R	1010	470	10	141	28	0.23	545	1
16 Volt								
AEF0810221M016R	0810	220	16	105.6	26	0.36	475	1
AEF0812331M016R	0812	330	16	158.4	26	0.36	510	1
AEF1010471M016R	1010	470	16	225.6	26	0.23	720	1
25 Volt								
AEF0608470M025R	0608	47	25	35.3	16	0.75	165	1
AEF0608101M025R	0608	100	25	75	16	0.75	175	1
AEF0810221M025R	0810	220	25	165	16	0.36	535	1
AEF1010331M025R	1010	330	25	247.5	16	0.23	750	1
35 Volt								
AEF0608100M035R	0608	10	35	10.5	14	0.75	145	1
AEF0608220M035R	0608	22	35	23.1	14	0.75	160	1
AEF0608330M035R	0608	33	35	34.7	14	0.75	175	1
AEF0608470M035R	0608	47	35	49.4	14	0.75	190	1
AEF0810101M035R	0810	100	35	105	14	0.36	560	1
AEF1010221M035R	1010	220	35	231	14	0.23	800	1

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

SMD Aluminum Electrolytic Capacitors

AEF Series



RATINGS & PART NUMBER REFERENCE

Part No.	Case Size	Capacitance (μF)	Rated Voltage (V)	DCL Max. (μA)	DF Max. (%)	ESR Max. @100kHz (Ω)	100kHz RMS Current (mA)	MSL
50 Volt								
AEF0608220M050R	0608	22	50	33	14	1.5	145	1
AEF0810470M050R	0810	47	50	70.5	14	0.57	520	1
AEF1010101M050R	1010	100	50	150	14	0.4	680	1
AEF1213221M050R	1213	220	50	330	14	0.18	875	1
AEF1216331M050R	1216	330	50	495	14	0.17	1020	1
63 Volt								
AEF0608220M063R	0608	22	63	41.6	12	4.6	140	1
AEF0810330M063R	0810	33	63	62.4	12	1.36	320	1
AEF0810470M063R	0810	47	63	88.8	12	1.36	380	1
AEF1010101M063R	1010	100	63	189	12	0.73	530	1
AEF1213221M063R	1213	220	63	415.8	12	0.3	840	1
80 Volt								
AEF0608100M080R	0608	10	80	24	12	5.2	130	1
AEF0810220M080R	0810	22	80	52.8	12	2.2	360	1
AEF0810330M080R	0810	33	80	79.2	12	2.2	410	1
AEF1010470M080R	1010	47	80	112.8	12	1.4	490	1
AEF1012101M080R	1012	100	80	240	12	1.4	530	1
AEF1216221M080R	1216	220	80	528	12	0.49	1020	1
100 Volt								
AEF0608100M100R	0608	10	100	30	10	5.5	140	1
AEF0810220M100R	0810	22	100	66	10	2.7	320	1
AEF1010330M100R	1010	33	100	99	10	1.8	360	1
AEF1010470M100R	1010	47	100	141	10	1.8	540	1
AEF1213101M100R	1213	100	100	300	10	0.68	550	1
160 Volt								
AEF1010100M160R	1010	10	160	164	20	16	176	1
AEF0812150M160R	0812	15	160	196	20	14	204	1
AEF1013330M160R	1013	33	160	311.2	20	9	340	1
AEF1016470M160R	1016	47	160	400.8	20	8	420	1
200 Volt								
AEF0810100M200R	0810	10	200	180	20	16	170	1
AEF0813150M200R	0813	15	200	220	20	14	210	1
250 Volt								
AEF081047M250R	0810	4.7	250	147	20	30	90	1
AEF0812100M250R	0812	10	250	200	20	16	150	1
AEF1016220M250R	1016	22	250	320	20	12	312	1
400 Volt								
AEF06102R2M400R	0610	2.2	400	135.2	24	35	48	1
AEF08103R3M400R	0810	3.3	400	152.8	24	32	72	1
AEF08124R7M400R	0812	4.7	400	175.2	24	26	100	1
AEF08125R6M400R	0812	5.6	400	189.6	24	24	108	1
AEF10136R8M400R	1013	6.8	400	208.8	24	22	140	1
AEF1013100M400R	1013	10	400	260	24	18	194	1
AEF1016150M400R	1016	15	400	340	24	16	235	1

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Rated Voltage (Vdc)	120 - 1K(Hz)	1K - 10K(Hz)	10K - 100K(Hz)	100K(Hz)
6.3 - 400	0.50	0.80	0.90	1.00

Internal heating produced by ripple current will reduce the lifetime of capacitors, at a rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use the rms ripple current should be minimized.

SMD Aluminum Electrolytic Capacitors

AEF Series



QUALIFICATION TABLE

Test	AEF series (Temperature Range -55°C to +105°C (6.3-100V), -40°C to +105°C (160-400V))								
	Condition	Characteristics							
Low Temperature Characteristics (Max. Impedance Ratio)	At 120Hz	Rated Voltage (V)	6.3	10	16	25	35 - 100	160 - 250	400
		Z(-25°C)/Z(+20°C)	4	3	2	2	2	6	6
		Z(-40°C)/Z(+20°C)	10	8	6	4	3	10	18
Endurance	The specifications shall be met when the capacitors are restored to 20°C after rated voltage is applied for 6,000 hours at 105°C.	Rated Voltage (V)	6.3 - 100				160 - 400		
		ΔC/C	≤±30% of the initial limit				≤±20% of the initial limit		
		DF	≤300% of the initial specified limit				≤200% of the initial specified limit		
		DCL	≤the initial specified limit				≤the initial specified limit		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after leaving them under no load at 105°C for 1,000 hours.	Rated Voltage (V)	6.3 - 100				160 - 400		
		ΔC/C	≤±30% of the initial limit				≤±20% of the initial limit		
		DF	≤300% of the initial specified limit				≤200% of the initial specified limit		
		DCL	≤200% of the initial specified limit				≤200% of the initial specified limit		

Tested in accordance to AEC-Q200

REFLOW

Diameter (mm)	Φ6.3	Φ8	Φ10	Φ12.5
Peak Temperature	260°C, 5 sec. max.			
Preheat Temperature	100°C to 200°C, 180 sec. max.			100°C to 180°C, 150 sec. max.
Duration at 200°C or higher	90 sec. max.	90 sec. max.	60 sec. max.	60 sec. max.
Duration at 230°C or higher	40 sec. max.	30 sec. max.	30 sec. max.	30 sec. max.
Reflow Number	Twice* or less			

*if twice then need to be at least 2hrs between reflows

STORAGE

- It is recommended to keep capacitors between the ambient temperatures of 5°C to 35°C (if between 35°C to 85°C, it should be less than three months) and the relative humidity of 75% or below.
- Confirm that the environment does not have any of the following conditions:
 - Damp conditions such as water, saltwater spray, or oil spray or fumes. High humidity or humidity condensation situations.
 - In an atmosphere filled with toxic gasses (such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.).
 - Being exposed to direct sunlight, ozone, ultraviolet ray, or radiation.
 - Being exposed to acidic or alkaline solutions.
 - Under severe conditions where vibration and / or mechanical shock exceed the applicable ranges of the specification.
- Storage time:
 - Before unseal: within 2 years after delivery

PACKAGE TAPE DIMENSIONS units (mm)

Size Code	A0±0.20	B0±0.20	W±0.30	F±0.10	E±0.10	P±0.10	t±0.10	T±0.20
0608	7.0	7.0	16.0	7.5	1.75	12.0	0.4	8.0
0610	7.0	7.0	16.0	7.5	1.75	12.0	0.4	11.0
0810	8.7	8.7	24.0	11.5	1.75	16.0	0.4	11.0
0812	8.7	8.7	24.0	11.5	1.75	16.0	0.4	13.0
0813	8.7	8.7	24.0	11.5	1.75	16.0	0.4	14.0
1010	10.7	10.7	24.0	11.5	1.75	16.0	0.4	11.0
1012	10.7	10.7	24.0	11.5	1.75	16.0	0.4	13.0 - 13.5
1013	10.7	10.7	24.0	11.5	1.75	16.0	0.4	15.0
1016	10.7	10.7	24.0	11.5	1.75	16.0	0.4	17.5
1213	13.4	13.4	32.0	14.2	1.75	24.0	0.4	14.5
1216	13.4	13.4	32.0	14.2	1.75	24.0	0.4	16.5

Diagram illustrating the structure of a polymer chain segment. The chain is represented by a wavy line with four beads (circles) attached. An arrow on the left indicates the "Direction of unrolling". To the right of the chain, there are two boxes, each containing a minus sign (-) and a plus sign (+), representing the stereochemistry of the polymer.

A diagram of a symmetrical mechanical part, possibly a bracket or a base, with a central vertical section and two side sections. The part is shown in a cross-sectional view with a grey body and blue highlights on the side sections. The dimensions are labeled as follows:

- A**: The width of the central vertical section.
- B**: The width of each side section.
- C**: The height of the side sections.