

General description

Unidirectional ElectroStatic Discharge (ESD) protection diode in a SOD523 plastic package designed to protect one transmission or data line from the damage caused by ESD and other transients.

Features and benefits

- Unidirectional ESD protection of one line
- Reverse stand-off voltage: 12V Max
- Low leakage current: nA Level
- Response time is typically < 1 ns
- Low clamping voltage: $V_C < 24\text{ V}$ @ $I_{PP} = 8\text{ A}$
- ESD Protection: 15kV(air)/ 8kV(contact) (IEC61000-4-2)
- Surge Protection: 8 A (IEC 61000-4-5 8/20 μs)



SOD523



Application information

- Cellular phones
- Portable devices
- Digital cameras
- Power supplies

Ordering information

Device	Package	Reel Size	Qty(PCS)
ESD5Z12	SOD523	7 Inch	3000

Ordering information



Marking	Naming rule	Graphic symbol
ZM		

Maximum Ratings ($T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PPM}	200	W
Peak Pulse Current($t_p = 8/20\mu\text{s}$)	I_{PPM}	8.0	A
Maximum lead temperature for soldering during 10s	T_L	260	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^{\circ}\text{C}$
Operating Temperature Range	T_{OP}	-40 to +125	$^{\circ}\text{C}$
Maximum junction temperature	T_j	150	$^{\circ}\text{C}$
ESD voltage IEC 61000-4-2 (air discharge)	V_{ESD}	15	kV
ESD voltage IEC 61000-4-2 (contact discharge)	V_{ESD}	8	kV


Electrical Characteristics ($T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Reverse Working Voltage	V_{RWM}	--	--	12.0	V	
Breakdown Voltage	V_{BR}	13.5	--	--	V	$I_T=1\text{mA}$
Leakage Current I_{Leak}	I_R	--	--	100	nA	$V_{RWM}=5\text{V}$
Clamping Voltage	V_C	--	--	24.0	V	$I_{PP}=8.0\text{A}, T_p=8/20\mu\text{s}$
Junction Capacitance	C_J	--	--	45	pF	$V_R=0\text{V}, f=1\text{MHz}$

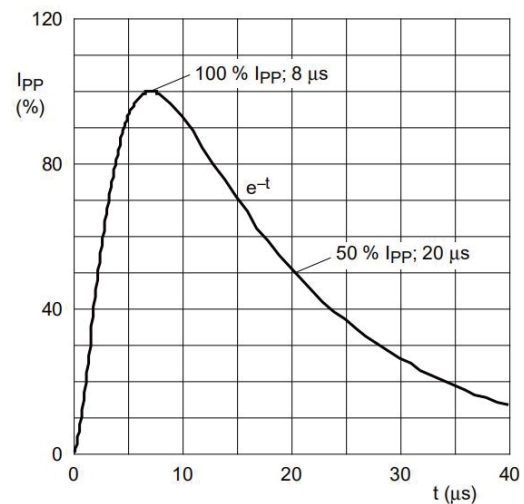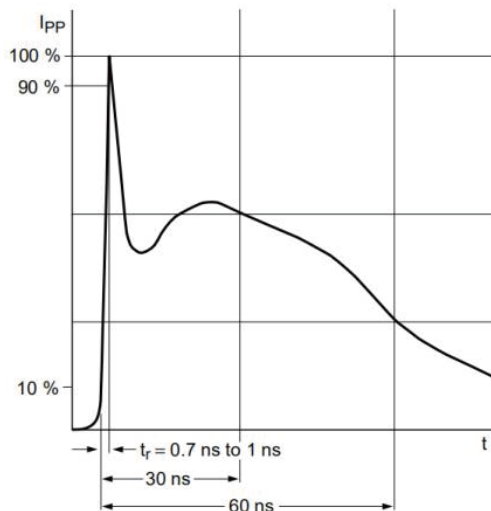

Package Outline Dimensions

SOD523

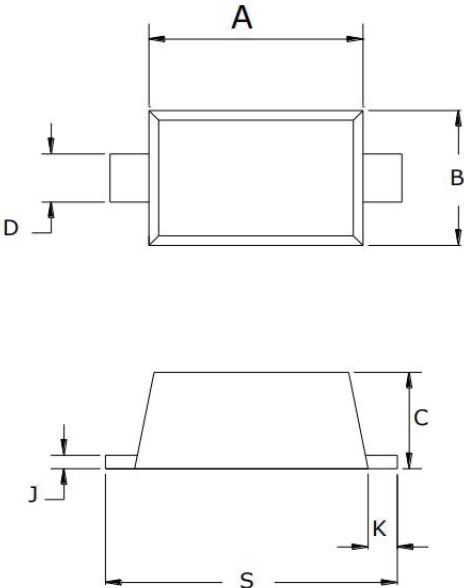

SYMBOL	MILLIMETERS	
	MIN	MAX
A	1.10	1.30
B	0.70	0.90
C	0.50	0.70
D	0.25	0.35
J	0.07	0.20
K	0.15	0.25
S	1.50	1.70

Soldering Footprint (mm)

