

General description

Unidirectional ElectroStatic Discharge (ESD) protection diode in a SOD523 plastic package designed to protect one transmission or data line from the damage caused by ESD and other transients

Features and benefits

- Unidirectional ESD protection of one line
- Reverse stand-off voltage: 5.0V Max
- Low leakage current: nA Level
- Response time is typically < 1 ns
- Low clamping voltage: $V_C = 11\text{ V}$ @ $I_{PP} = 20\text{ A}$ (TYP)
- ESD Protection: 30kV(air)/ 30kV(contact) (IEC61000-4-2)
- Surge Protection: 20A (IEC 61000-4-5 8/20 μs)



SOD523



Application information

- Cellular phones
- Portable devices
- Digital cameras
- Power supplies

Ordering information

Device	Package	Reel Size	Qty(PCS)
ESD5B5.0	SOD523	7 Inch	3000

Ordering information

Marking	Naming rule	Graphic symbol
N2		

Maximum Ratings ($T_A = 25^\circ\text{C}$, unless otherwise specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PPM}	250	W
Peak Pulse Current ($t_p = 8/20\mu\text{s}$)	I_{PPM}	20	A
Maximum lead temperature for soldering during 10s	T_L	260	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$
Operating Temperature Range	T_{OP}	-40 to +125	$^\circ\text{C}$
Maximum junction temperature	T_j	150	$^\circ\text{C}$
ESD voltage IEC 61000-4-2 (air discharge)	V_{ESD}	30	kV
ESD voltage IEC 61000-4-2 (contact discharge)	V_{ESD}	30	kV

Electrical Characteristics ($T_A = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Reverse Working Voltage	V_{RWM}	--	--	5.0	V	
Breakdown Voltage	V_{BR}	6.8	--	8.2	V	$I_T = 1\text{mA}$
Leakage Current I_{Leak}	I_R	--	--	100	nA	$V_{RWM} = 5\text{V}$
Clamping Voltage	V_C	--	11	13	V	$I_{PP} = 20\text{A}$, $T_p = 8/20\mu\text{s}$
Junction Capacitance	C_j	--	140	150	pF	$V_R = 0\text{V}$, $f = 1\text{MHz}$
Forward Voltage	V_F	0.7	0.8	0.9	V	$I_F = 10\text{mA}$


Portion Electronics Parameter

Symbol	Parameter
I_{PPM}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Reverse Leakage Current @ V_{RWM}
I_T	Test Current
V_{BR}	Breakdown Voltage @ I_T
I_F	Forward Current
V_F	Forward Voltage @ I_F

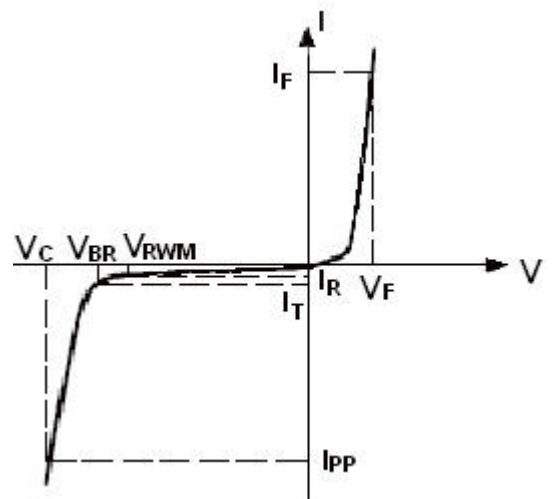

Package Outline Dimensions

SOD523

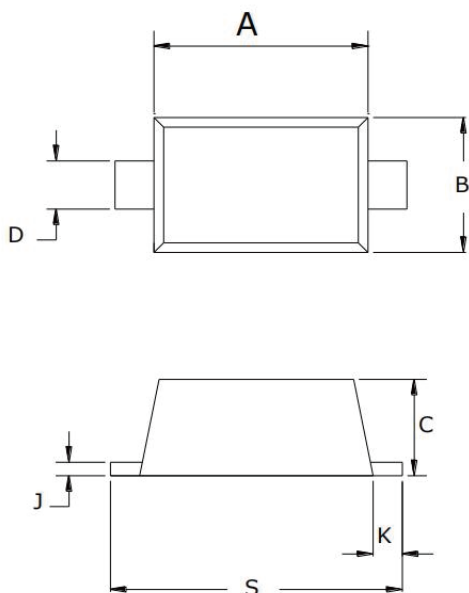

SYMBOL	MILLIMETERS	
	MIN	MAX
A	1.10	1.30
B	0.70	0.90
C	0.50	0.70
D	0.25	0.35
J	0.07	0.20
K	0.15	0.25
S	1.50	1.70

Soldering Footprint (mm)

