

Features


- Low $R_{DS(on)}$ & FOM
- Extremely low switching loss
- Excellent stability and uniformity
- Fast switching and soft recovery

Application

- Consumer electronic power supply
- Motor control
- Synchronous-rectification
- Isolated DC/DC convertor


Product Summary

V_{DS}	$R_{DS(on)}$ MAX	I_D MAX
100V	126mΩ@10V	3.1A
	144mΩ@4.5V	




S92: Device code

Marking and pin assignment

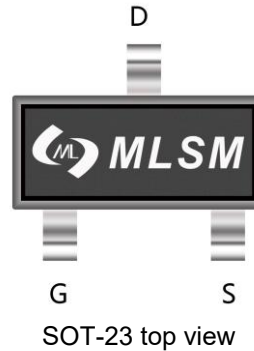

SOT-23 top view



Schematic diagram



Pb-Free



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			
V_{DS}	Drain-Source Breakdown Voltage	100	V
V_{GS}	Gate-Source Voltage	±20	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-55 to 150	°C
I_S	Diode Continuous Forward Current	$T_c=25^{\circ}\text{C}$ 2.1	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_c=25^{\circ}\text{C}$ 8	A
I_D	Continuous Drain Current	$T_c=25^{\circ}\text{C}$ 3.1	A
P_D	Maximum Power Dissipation	$T_c=25^{\circ}\text{C}$ 2.5	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	100	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
Si2392ADS	SOT-23	S92	3,000	45,000	180,000	7" reel

Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =100V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.2	--	3	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =2A	--	102	126	mΩ
		V _{GS} =4.5V, I _D =1A	--	135	189	mΩ
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =50V, V _{GS} =0V, f=1MHz	--	196	--	pF
C _{OSS}	Output Capacitance		--	67	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	14	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =50V, I _D =2.2A, V _{GS} =4.5V	--	2.9	--	nC
Q _{gs}	Gate Source Charge		--	1	--	nC
Q _{gd}	Gate Drain Charge		--	1.4	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DS} =50V, I _D =1.8A, R _L =27.7Ω, V _{GS} =4.5V, R _G =1Ω	--	40	--	nS
t _r	Turn-on Rise Time		--	68	--	nS
t _{d(off)}	Turn-Off Delay Time		--	14	--	nS
t _f	Turn-Off Fall Time		--	20	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=1.8A	--	0.8	1.2	V

Typical Operating Characteristics

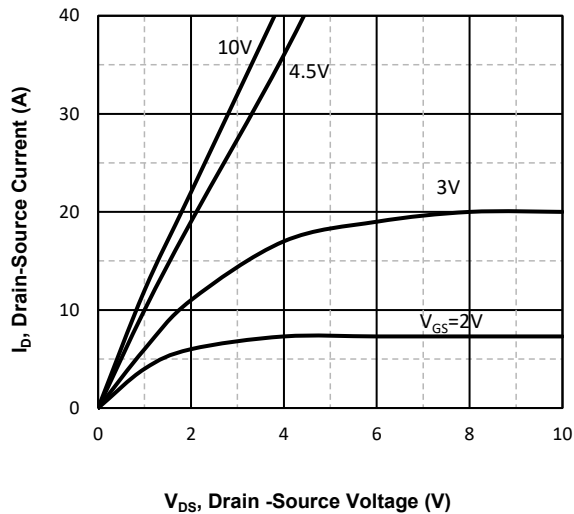


Fig1. Typical Output Characteristics

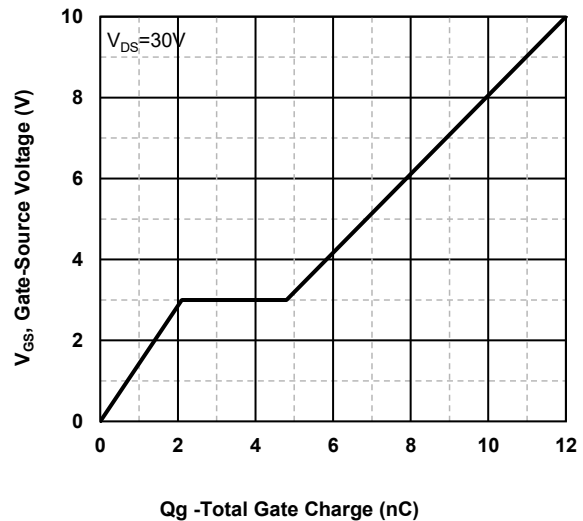


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

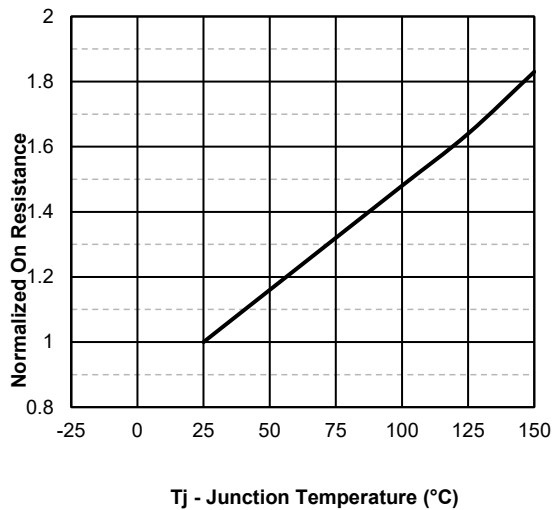


Fig3. Normalized On-Resistance Vs. Temperature

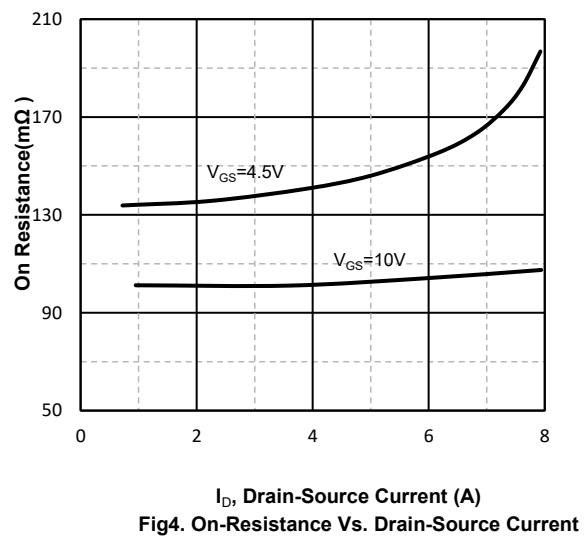


Fig4. On-Resistance Vs. Drain-Source Current

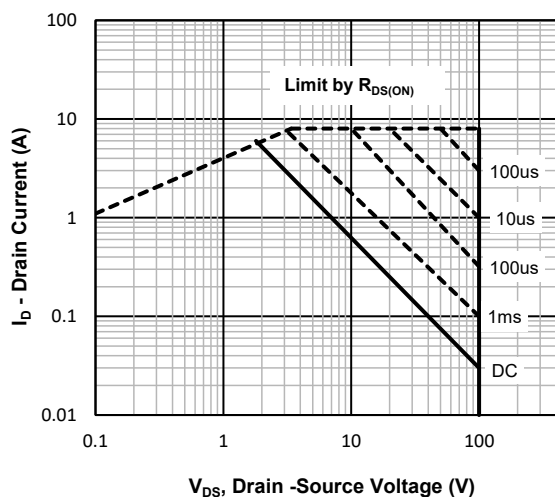


Fig5. Maximum Safe Operating Area


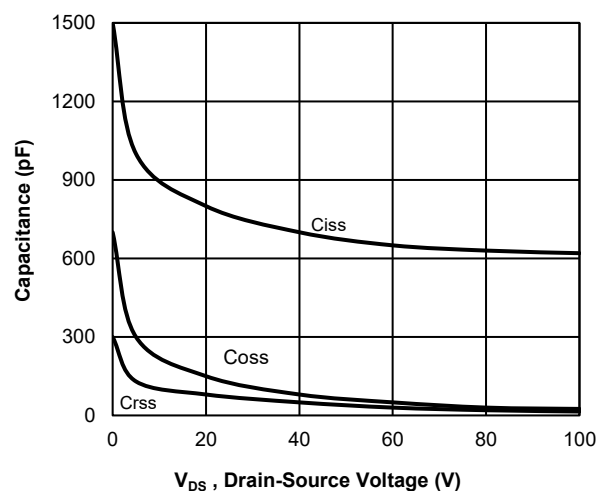


Fig6 Typical Capacitance Vs. Drain-Source Voltage

SOT-23 Package information

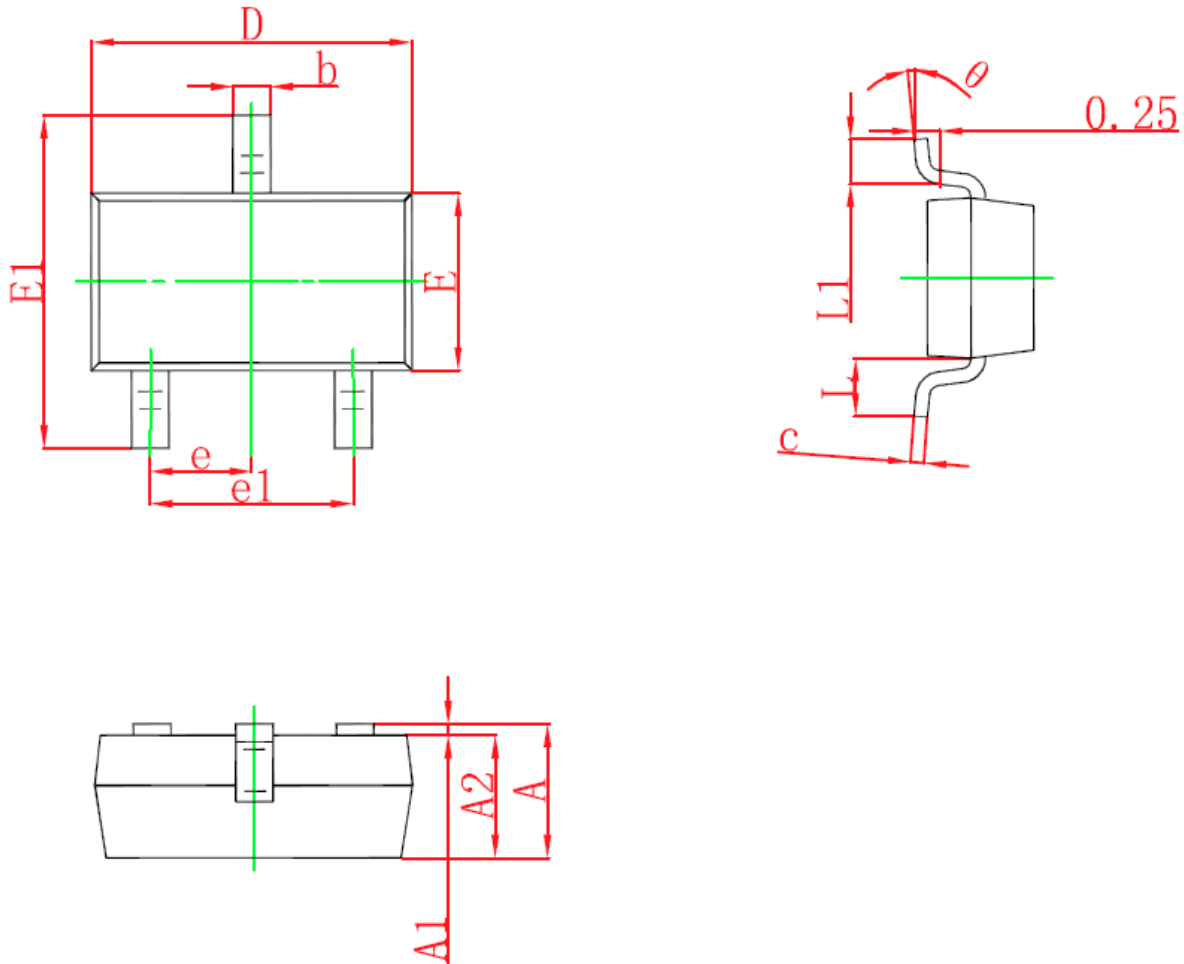

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°