

Prosperity Dielectrics Co., Ltd.

No.566-1, Kaoshi Rd., Yangmei, Taoyuan 32668, Taiwan (R.O.C.)

Tel : 886-3-4753355

Fax : 886-3-4854959

Messrs. : 一般共用

Date : 2024/04/08

APPROVAL SHEET

Product Name : Anti-Bend General Purpose Multilayer Ceramic Chip Capacitors

Part No. : FP Series

Description : Anti-Bend Size 0402~2225, C0G/X7R, 25V~5000V

PREPARED BY	APPROVED BY

信昌電子陶瓷股份有限公司

PROSPERITY DIELECTRICS CO., LTD.

桃園市楊梅區高獅路 566-1 號 <http://www.pdc.com.tw>

Tel : 03-4753355 ext :

Fax : 03-4854959

Contactor : _____ **Mobile :** _____

SPECIFICATION

FOR

**Product Name : Anti-Bend General Purpose Multilayer Ceramic
Chip Capacitors**

Part No. : FP Series

Description : Anti-Bend Size 0402~2225, C0G/X7R, 25V~5000V

SPEC. No. : FP-000-001-22

DATE : 2024/04/08

DRAWN BY	CHECEKED BY	APPROVED BY
<i>Jane Hsiao</i>	<i>Yvens Chou</i>	<i>Jason Lin</i>

1. INTRODUCTION

POSPERITY Multilayer Ceramic Chip Capacitors supplied in bulk or tape & reel package are ideally suitable for thick-film hybrid circuits and automatic surface mounting on any printed circuit boards.

FP series use a special material between nickel-barrier and ceramic body. It provides excellent performance to against bending stress occurred during process and provide more security for PCB process.

The nickel-barrier terminations are consisted of a nickel barrier layer over the silver metallization and then finished by electroplated solder layer to ensure the terminations have good solderability. The nickel barrier layer in terminations prevents the dissolution of termination when extended immersion in molten solder at elevated solder temperature.

2. FEATURES

- High performance to withstanding 3~5mm of substrate bending test guarantee.
- A wide selection of sizes is available.
- High capacitance in given case size.
- Capacitor with lead-free termination (pure Tin).
- Reduction in PCB bend failure.
- High reliability and stability.
- RoHS & HALOGEN FREE.

4. HOW TO ORDER

3. APPLICATIONS

- For general digital circuit.
- For power supply bypass capacitors.
- For consumer electronics.
- For telecommunication.
- DC to DC converter.

FP	32	X	225	K	101	E	G	G
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated Voltage	Packaging	Thickness	Control Code
Table 1	Table 2	Table 3	Table 4	Table 5	Table 6	Table 7	Table 8	Table 9

Table 1	PDC Family
Code	Description
FP	Anti-Bend General Purpose Product

Table 2		General Purpose			
Code	Description	Code	Description	Code	Description
15	0402 (1005)	32	1210 (3225)	52	2211 (5728)
18	0603 (1608)	42	1808 (4520)	55	2220 (5750)
21	0805 (2012)	43	1812 (4532)	56	2225 (5763)
31	1206 (3216)	46	1825 (4563)		

Table 3		Dielectric Material Characteristics	
Code	Description	Code	Description
N	C0G	X	X7R
B	X5R		

Table 4		Capacitance Rule Code	
Code	Description	Code	Description
R47	0.47pF	102	102=10x10 ² =1000pF
0R5	0.5pF	104	104=10x10 ⁴ =100nF
100	100=10x10 ⁰ =10pF	106	106=10x10 ⁶ =10μF

Table 5		Tolerance			
Code	Description	Code	Description	Code	Description
A	±0.05 pF	I	-10% ~ 0%	Q	±0.03 pF
B	±0.10 pF	J	±5 %	Z	-20% ~ +80%
C	±0.25 pF	K	±10 %	X	+10% ~ +20%
D	±0.50 pF	L	0% ~ +10%		
F	±1 %	M	±20 %		
G	±2 %	N	-5% ~ +10%		
H	±3 %	P	±0.02 pF		

Table 6		Rated Voltage			
Code	Description	Code	Description	Code	Description
6R3	6.3Vdc	201	200Vdc	152	1500Vdc
100	10Vdc	251	250Vdc	202	2000Vdc
160	16Vdc	401	400Vdc	302	3000Vdc
250	25Vdc	501	500Vdc	402	4000Vdc
500	50Vdc	631	630Vdc	502	5000Vdc
101	100Vdc	102	1000Vdc	602	6000Vdc

Table 7		Packaging Type	
Code	Description	Code	Description
B	Bulk	T	Tray package
E	Tape and 7" Reel, Embossed Tape	P	Tape and 7" Reel, Paper Tape
K	Tape and 10" Reel, Embossed Tape	D	Tape and 10" Reel, Paper Tape
L	Tape and 13" Reel, Embossed Tape	G	Tape and 13" Reel, Paper Tape

Table 8		Thickness Description			
Code	Description	Code	Description	Code	Description
A	0.60 ± 0.10 mm	I	1.25 ± 0.20 mm	Q	0.50 +0.02/-0.05 mm
B	0.8 + 0.15/-0.10 mm	J	1.15 ± 0.15 mm	R	3.10 ± 0.30 mm
C	1.25 ± 0.10 mm	K	0.50 ± 0.20 mm	S	0.80 ± 0.07 mm
D	1.40 ± 0.15 mm	L	0.30 ± 0.03 mm	T	0.85 ± 0.10 mm
E	1.60 ± 0.20 mm	M	0.95 ± 0.10 mm	U	0.50 ± 0.10 mm
F	2.00 ± 0.20 mm	N	0.50 ± 0.05 mm	V	0.20 ± 0.02 mm
G	2.50 ± 0.30 mm	O	3.50 ± 0.20 mm	X	0.80 ± 0.10 mm
H	2.80 ± 0.30 mm	P	1.60 +0.3/-0.10 mm	Z	0.25 ± 0.03 mm

Table 9		Special Control Code	
Code	Description	Code	Description
G	RoHS Compliant	H	High reliability
		Q	Surface Coating (Size 1206~2225)

5. EXTERNAL DIMENSIONS

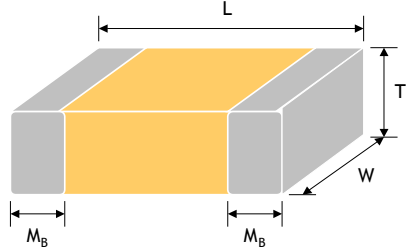
Size Inch (mm)	L (mm)	W (mm)	Code / T (mm)	M _B (mm)	
0402(1005)	1.00±0.20	0.50±0.20	See No.4 Reference Table 8	0.25 +0.05/- 0.10	
0603(1608)	1.60±0.20	0.80±0.20		0.40±0.15	
0805(2012)	2.10±0.20	1.25±0.20		0.50±0.20	
1206(3216)	3.30±0.30	1.60±0.20 1.60 +0.30/-0.10 [#] ▼1.60±0.40		0.60±0.20	
1210(3225)	3.30±0.40	2.50±0.30 ▼2.50+0.35/-0.30		0.75±0.35	
1808(4520)	4.60±0.50	2.00±0.25		0.75±0.35	
1812(4532)	4.60±0.50	3.20±0.30		0.75±0.35	
1825(4563)	4.60±0.50	6.30±0.40		0.75±0.35	
2220(5750)	5.70±0.50	5.00±0.40		0.85±0.35	
2225(5763)	5.70±0.50	6.30±0.40		0.85±0.35	

Fig. 5.1 The outline of MLCC

[#] For 1206 size P thickness products.

▼ For 1206/Cap.≥5.6μF & 1210/Cap.≥12μF products.

6. GENERAL ELECTRICAL DATA

Dielectric	C0G	X7R												
Size	0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225												
Rated voltage (WVDC)	10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1KV, 1.5KV, 2KV, 3KV, 4KV	6.3V, 10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1KV, 1.5KV, 2KV, 3KV, 4KV, 5KV												
Capacitance range	0.1pF ~ 330nF	100pF ~ 22μF												
Capacitance tolerance	Reference to Table 5	Reference to Table 5												
Tan δ	<table><tr><td>Cap. Range</td><td>Q Spec.</td></tr><tr><td>Cap.<30pF</td><td>Q≥400+20C</td></tr><tr><td>Cap.≥30pF</td><td>Q≥1000</td></tr></table>	Cap. Range	Q Spec.	Cap.<30pF	Q≥400+20C	Cap.≥30pF	Q≥1000	Reference to 8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS						
Cap. Range	Q Spec.													
Cap.<30pF	Q≥400+20C													
Cap.≥30pF	Q≥1000													
Capacitance & Tan δ Test condition	For 25°C at ambient temperature <table><tr><td>Cap. Range</td><td>Test Condition</td></tr><tr><td>Cap.≤1000pF</td><td>1.0±0.2Vrms, 1.0MHz±10%</td></tr><tr><td>Cap.>1000pF</td><td>1.0±0.2Vrms, 1.0KHz±10%</td></tr></table>	Cap. Range	Test Condition	Cap.≤1000pF	1.0±0.2Vrms, 1.0MHz±10%	Cap.>1000pF	1.0±0.2Vrms, 1.0KHz±10%	Preconditioning for Class II MLCC : Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement <table><tr><td>Cap. Range</td><td>Test Condition</td></tr><tr><td>Cap.≤10μF</td><td>1.0±0.2Vrms, 1.0KHz±10%</td></tr><tr><td>Cap.>10μF</td><td>0.5±0.2Vrms, 120Hz±20%</td></tr></table>	Cap. Range	Test Condition	Cap.≤10μF	1.0±0.2Vrms, 1.0KHz±10%	Cap.>10μF	0.5±0.2Vrms, 120Hz±20%
Cap. Range	Test Condition													
Cap.≤1000pF	1.0±0.2Vrms, 1.0MHz±10%													
Cap.>1000pF	1.0±0.2Vrms, 1.0KHz±10%													
Cap. Range	Test Condition													
Cap.≤10μF	1.0±0.2Vrms, 1.0KHz±10%													
Cap.>10μF	0.5±0.2Vrms, 120Hz±20%													
Insulation resistance	≥10GΩ or RxC≥500Ω·F, whichever is smaller	≥10GΩ or RxC≥100Ω·F, whichever is smaller												
Operating temperature	-55°C to +125°C	-55°C to +125°C												
Temperature coefficient	±30ppm/°C	±15%												
Termination	Cu/Ag polymer/Ni/Sn (lead-free termination)	Cu/Ag polymer/Ni/Sn (lead-free termination)												

7. CAPACITANCE RANGE

7-1. C0G

Dimension		0402					0603							0805									
Cap.(pF)	Code	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	200V	250V	10V	16V	25V	50V	100V	200V	250V	500V	630V	1000V
0.1	0R1	K	K	K	K																		
0.2	0R2	K	K	K	K																		
0.3	0R3	K	K	K	K		S	S	S	S													
0.4	0R4	K	K	K	K		S	S	S	S													
0.5	0R5	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
0.6	0R6	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
0.7	0R7	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
0.8	0R8	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
0.9	0R9	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
1.0	1R0	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
1.2	1R2	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
1.5	1R5	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
1.8	1R8	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
2.2	2R2	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
2.7	2R7	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
3.3	3R3	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
3.9	3R9	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
4.7	4R7	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
5.0	5R0	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
5.6	5R6	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
6.8	6R8	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
8.2	8R2	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
10	100	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
12	120	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
15	150	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
18	180	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
22	220	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
27	270	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
33	330	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
39	390	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
47	470	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
56	560	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
68	680	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	A	A	C
82	820	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	X	X	C
100	101	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	X	X	C
120	121	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	A	A	X	C	C
150	151	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	X	X	C	C	C
180	181	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	X	C	C	C	C
220	221	K	K	K	K	K	S	S	S	S	S	S	S	A	A	A	A	A	C	C	C	C	C
270	271	K	K	K	K		S	S	S	S	S	B	B	A	A	A	A	A	C	C	C	C	C
330	331	K	K	K	K		S	S	S	S	S	B	B	A	A	A	A	A	C	C	C	C	C
390	391	K	K	K	K		S	S	S	S	S	B	B	X	X	X	X	X	C	C	C	C	C
470	471	K	K	K	K		S	S	S	S	S	B	B	X	X	X	X	X	C	C	I	I	
560	561	K	K	K	K		S	S	S	S	S			X	X	X	X	X	C	C	I	I	
680	681	K	K	K	K		S	S	S	S	S			X	X	X	X	X	C	C	I	I	
820	821	K	K	K	K		S	S	S	S	S			X	X	X	X	X	C	C	I	I	
1000	102	K	K	K	K		S	S	S	S	S			X	X	X	X	X	C	C	I	I	
1200	122						B	B	B	B				X	X	X	X	X	C	C			
1500	152						B	B	B	B				X	X	X	X	X	C	C			
1800	182						B	B	B	B				X	X	X	X	X	C	C			
2200	222						B	B	B	B				X	X	X	X	X	C	C			
2700	272						B	B	B	B				C	C	C	C	C	C	C			
3300	332						B	B	B	B				C	C	C	C	C					
3900	392													C	C	C	C	C					
4700	472													C	C	C	C	C					
5600	562													C	C	C	C	C					
6800	682													C	C	C	C	C					
8200	822													C	C	C	C						
10000	103													C	C	C	C						

7. CAPACITANCE RANGE(Con.)

7-1. C0G

Dimension		1206										1210										
Cap.(pF)	Code	10V 16V 25V	50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	10V 16V 25V	50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	3000V
1.0	1R0		X																			
1.2	1R2	X	X	X			X															
1.5	1R5	X	X	X	X	X	X	X	X	X	X											
1.8	1R8	X	X	X	X	X	X	X	X	X	X											
2.2	2R2	X	X	X	X	X	X	X	X	X	X											
2.7	2R7	X	X	X	X	X	X	X	X	X	X											
3.3	3R3	X	X	X	X	X	X	X	X	X	X											
3.9	3R9	X	X	X	X	X	X	X	X	X	X											
4.7	4R7	X	X	X	X	X	X	X	X	X	X											
5.0	5R0	X	X	X	X	X	X	X	X	X	X											
5.6	5R6	X	X	X	X	X	X	X	X	X	X											
6.8	6R8	X	X	X	X	X	X	X	X	X	X											
8.2	8R2	X	X	X	X	X	X	X	X	X	X											
10	100	X	X	X	X	X	X	X	X	X	X	M	M	M	M	M	M	M	M	M	M	F
12	120	X	X	X	X	X	X	X	X	X	X	M	M	M	M	M	M	M	M	M	M	F
15	150	X	X	X	X	X	X	X	X	X	X	M	M	M	M	M	M	M	M	M	M	F
18	180	X	X	X	X	X	X	X	X	X	X	M	M	M	M	M	M	M	M	M	M	F
22	220	X	X	X	X	X	X	X	X	X	X	M	M	M	M	M	M	M	M	M	M	F
27	270	X	X	X	X	X	X	X	X	X	X	M	M	M	M	M	M	M	M	M	M	F
33	330	X	X	X	X	X	X	X	X	M	M	M	M	M	M	M	M	M	M	M	M	F
39	390	X	X	X	X	X	X	X	X	M	M	M	M	M	M	M	M	M	M	M	M	F
47	470	X	X	X	X	X	X	X	M	M	M	M	M	M	M	M	M	M	M	M	M	F
56	560	X	X	X	X	X	X	X	M	C	C	M	M	M	M	M	M	M	M	C	C	F
68	680	X	X	X	X	X	X	X	M	C	C	M	M	M	M	M	M	M	M	C	C	F
82	820	X	X	X	X	X	X	X	C	C	C	M	M	M	M	M	M	M	M	C	C	F
100	101	X	X	X	X	X	X	X	C	C	C	M	M	M	M	M	M	M	C	C	C	F
120	121	X	X	X	X	X	X	X	C	E	E	M	M	M	M	M	M	M	C	C	C	F
150	151	X	X	X	X	X	X	X	C	E	E	M	M	M	M	M	M	M	C	E	E	F
180	181	X	X	X	X	X	X	X	E	E	E	M	M	M	M	M	M	M	C	E	E	F
220	221	X	X	X	X	X	X	X	E	E	E	M	M	M	M	M	M	M	E	E	E	F
270	271	X	X	X	X	M	M	M	E	P	P	M	M	M	M	M	M	M	E	F	F	G
330	331	X	X	X	X	M	M	M	E	P	P	M	M	M	M	M	M	M	E	F	F	
390	391	X	X	X	X	M	M	M	E	P	P	M	M	M	M	M	M	M	E	G	G	
470	471	X	X	X	M	M	M	M	E	E	E	M	M	M	M	M	M	M	E	G	G	
560	561	X	X	X	M	C	C	C	E			M	M	M	M	M	M	M	E	G	G	
680	681	X	X	X	M	C	C	C	E			M	M	M	M	M	M	M	E	G	G	
820	821	X	X	X	M	E	E	E	E			M	M	M	M	M	M	M	E	G	G	
1000	102	X	X	X	M	E	E	E	E			M	M	M	C	C	C	C	E	G	G	
1200	122	X	X	X	M	E	E	E				M	M	M	C	C	C	C	E	F	F	
1500	152	X	X	X	C	E	E	E				M	M	M	C	C	C	C	F	G	G	
1800	182	X	X	X	C	E	E	E				M	M	M	C	C	C	C	G	G	G	
2200	222	X	X	X	C	E	E	E				M	M	M	C	C	C	C	G			
2700	272	X	X	X	C	E	E	E				M	M	M	C	C	C	C	G			
3300	332	X	X	X	C	E	E	E				M	M	M	C	C	C	C	G			
3900	392	X	X	X	E	E	E	E				M	M	M	C	C	C	C	G			
4700	472	X	X	X	E	E	E	E				M	M	M	E	E	E	E	G			
5600	562	X	X	X	E	E	E	E				M	M	C	E	E	E	E	G			
6800	682	M	M	M	E	E	E	C/E				M	M	C	E	E	E	E	G			
8200	822	C	C	C	E	E	E	E				M	M	C	E	E	E	E	G			
10000	103	C	C	C	E	E	E	E				M	M	E	F	F	F	F	G			
12000	123	P	P	P								C	C	E	F	F	F	F				
15000	153	P	P	P								C	C	F	F	F	F	F				
18000	183	P	P	P								F	F	F	F	F	F	F				
22000	223	P	P	P								F	F	F	F	F	F	F				
27000	273	P	P									F/G	F/G	F	F	F	G	G				
33000	333	P	P									F/G	F/G	F	F	F	G	G				
39000	393	P	P									F/G	F/G	F	F	F						
47000	473											F	F	F	F	F						
56000	563																					
68000	683																					

7. CAPACITANCE RANGE(Con.)

7-1. C0G

Dimension	Cap.(pF)	Code	1808										1812													
			25V 50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	3000V	4000V	10V 16V	25V	50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	3000V	4000V
1.0	1R0																									
1.2	1R2																									
1.5	1R5																									
1.8	1R8																									
2.2	2R2		C	C	C	C	C	C	C	C	C	C	C													
2.7	2R7		C	C	C	C	C	C	C	C	C	C	C													
3.3	3R3		C	C	C	C	C	C	C	C	C	C	C													
3.9	3R9		C	C	C	C	C	C	C	C	C	C	C													
4.7	4R7		C	C	C	C	C	C	C	C	C	C	C													
5.0	5R0		C	C	C	C	C	C	C	C	C	C	C													
5.6	5R6		C	C	C	C	C	C	C	C	C	C	C													
6.8	6R8		C	C	C	C	C	C	C	C	C	C	C													
8.2	8R2		C	C	C	C	C	C	C	C	C	C	C													
10	100		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
12	120		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
15	150		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
18	180		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
22	220		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
27	270		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
33	330		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C*
39	390		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C*
47	470		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E*
56	560		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E*
68	680		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F*
82	820		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F*
100	101		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F*
120	121		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	G*
150	151		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
180	181		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
220	221		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
270	271		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
330	331		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
390	391		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
470	471		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
560	561		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
680	681		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
820	821		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
1000	102		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	G
1200	122		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	R
1500	152		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
1800	182		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
2200	222		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
2700	272		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
3300	332		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
3900	392		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
4700	472		C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
5600	562		C	C	E	E								C	C	C	C	C	C	C	C	C	C	C	C	
6800	682		C	C	E	E								C	C	C	C	C	C	C	C	C	C	C	C	
8200	822		C	E	F	F								C	C	C	C	C	C	C	C	C	C	C	C	
10000	103		C	E	F	F								C	C	C	C	C	C	C	C	C	C	C	C	
12000	123		E											C	C	C	C	E	E	E	E	E	E	E	E	
15000	153		E											C	C	C	C	E	E	E	E	E	E	E	E	
18000	183		F											C	C	C	E	F	F	F	F	F	F	F	F	
22000	223		F											C	C	C	E	F	F	F	F	F	F	F	F	
27000	273													C	E	E	F	G	G							
33000	333													C	E	E	F									
39000	393														F	F	G									
47000	473														F	F	G									
56000	563														G	G										
68000	683														G	G										
82000	823														G	G										
100000	104														G	G										
120000	124																									
150000	154																									

7. CAPACITANCE RANGE(Con.)

7-1. C0G

Dimension		1825										2220											
Cap.(pF)	Code	25V 50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	3000V	25V 50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	3000V	4000V	
10	100	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		F	F		
12	120	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		F	F		
15	150	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
18	180	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
22	220	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
27	270	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
33	330	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
39	390	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
47	470	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
56	560	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
68	680	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
82	820	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
100	101	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
120	121	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
150	151	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
180	181	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
220	221	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	
270	271	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	G	
330	331	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	G	
390	391	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
470	471	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
560	561	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
680	681	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
820	821	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
1000	102	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
1200	122	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
1500	152	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
1800	182	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F		
2200	222	F	F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F			
2700	272	F	F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F			
3300	332	F	F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F			
3900	392	F	F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F			
4700	472	F	F	F	F	F	F	F	F	F		F	F	F	F	F	F	F	F	F			
5600	562	F	F	F	F	F	F	F	F			F	F	F	F	F	F	F					
6800	682	F	F	F	F	F	F	F	F			F	F	F	F	F	F	F					
8200	822	F	F	F	F	F	F	G				F	F	F	F	F	F	G					
10000	103	F	F	F	F	F	F	G				F	F	F	F	F	F	G					
12000	123	F	F	F	F	F	F					F	F	F	F	F	F						
15000	153	F	F	F	F	F	F					F	F	F	F	F	F						
18000	183	F	F	F	F	F	F					F	F	F	F	F	F						
22000	223	F	F	F	F	F	F					F	F	F	F	F	F						
27000	273	F	F	F	F	F	F					F	F	F	F	F	F						
33000	333	F	F	F	F	F	F					F	F	F	F	F	E/F						
39000	393	F	E	F	F	G	G					F	F	F	F	F	E/F						
47000	473	F	E	F	F							F	F	G	G	G	E/F						
56000	563	F	F	G	G							F	F	G	G		F						
68000	683	F	F	G	G							F	F	G	G		F						
82000	823	F	G									F	G				F						
100000	104	G	G									G	G				G						
120000	124																						
150000	154																						
180000	184																						
220000	224																						
270000	274																						
330000	334																						

7. CAPACITANCE RANGE(Con.)

7-1. C0G

Dimension		2225										
Cap.(pF)	Code	25V 50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	3000V	4000V
10	100	F	F	F	F	F	F	F	F	F	F	
12	120	F	F	F	F	F	F	F	F	F	F	
15	150	F	F	F	F	F	F	F	F	F	F	
18	180	F	F	F	F	F	F	F	F	F	F	
22	220	F	F	F	F	F	F	F	F	F	F	
27	270	F	F	F	F	F	F	F	F	F	F	F
33	330	F	F	F	F	F	F	F	F	F	F	F
39	390	F	F	F	F	F	F	F	F	F	F	F
47	470	F	F	F	F	F	F	F	F	F	F	F
56	560	F	F	F	F	F	F	F	F	F	F	F
68	680	F	F	F	F	F	F	F	F	F	F	F
82	820	F	F	F	F	F	F	F	F	F	F	F
100	101	F	F	F	F	F	F	F	F	F	F	F
120	121	F	F	F	F	F	F	F	F	F	F	
150	151	F	F	F	F	F	F	F	F	F	F	
180	181	F	F	F	F	F	F	F	F	F	F	
220	221	F	F	F	F	F	F	F	F	F	F	
270	271	F	F	F	F	F	F	F	F	F	F	
330	331	F	F	F	F	F	F	F	F	F	F	
390	391	F	F	F	F	F	F	F	F	F	F	
470	471	F	F	F	F	F	F	F	F	F	F	
560	561	F	F	F	F	F	F	F	F	F	F	
680	681	F	F	F	F	F	F	F	F	F	F	
820	821	F	F	F	F	F	F	F	F	F	F	
1000	102	F	F	F	F	F	F	F	F	F	F	
1200	122	F	F	F	F	F	F	F	F	F	F	
1500	152	F	F	F	F	F	F	F	F	F	F	
1800	182	F	F	F	F	F	F	F	F	F	F	
2200	222	F	F	F	F	F	F	F	F	F	F	
2700	272	F	F	F	F	F	F	F	F	F	G	
3300	332	F	F	F	F	F	F	F	F	F	G	
3900	392	F	F	F	F	F	F	F	F	F		
4700	472	F	F	F	F	F	F	F	F	F		
5600	562	F	F	F	F	F	F	F	F	F		
6800	682	F	F	F	F	F	F	F	F	F		
8200	822	F	F	F	F	F	F	G	G	G		
10000	103	F	F	F	F	F	F	G	G	G		
12000	123	F	F	F	F	F	F					
15000	153	F	F	F	F	F	F					
18000	183	F	F	F	F	F	F					
22000	223	F	F	F	F	F	F					
27000	273	F	F	F	F	F	F					
33000	333	F	F	F	F	F	F					
39000	393	F	F	F	F	F	F					
47000	473	F	F	F	F	F	F					
56000	563	F	F	G	G	G	G					
68000	683	F	F	G	G	G	G					
82000	823	F	F	G	G	G						
100000	104	F	G	G	G							
120000	124											
150000	154											
180000	184											
220000	224											
270000	274											
330000	334											

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Dimension		0402						0603								0805											
Cap.(pF)	Code	6.3V	10V	16V	25V	50V	100V	6.3V	10V	16V	25V	50V	100V	200V	250V	6.3V	10V	16V	25V	50V	100V	200V	250V	500V	630V	1000V	
100	101		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
120	121		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
150	151		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
180	181		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
220	221		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
270	271		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
330	331		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
390	391		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
470	471		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
560	561		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
680	681		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
820	821		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
1000	102		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
1200	122		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	X
1500	152		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	C
1800	182		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	C
2200	222		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	C
2700	272		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	
3300	332		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	
3900	392		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	X	X	
4700	472		K	K	K	K	K		S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	C	C	
5600	562		K	K	K	K			S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	C	C	
6800	682		K	K	K	K			S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	C	C	
8200	822		K	K	K	K			S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	C	C	
10000	103		K	K	K	K			S	S	S	S	S	B	B		C	C	C	C	C	C	C	C	C	C	
12000	123		K	K	K				S	S	S	S	B				C	C	C	C	C	C	C	C	C	C	
15000	153		K	K	K				S	S	S	S	B				C	C	C	C	C	C	C	C	C	C	
18000	183		K	K	K				S	S	S	S	B				C	C	C	C	C	C	C	C	C	C	
22000	223		K	K	K				S	S	S	S	B				C	C	C	C	C	C	C	C	C	C	
27000	273		K	K	K				S	S	S	S	B				C	C	C	C	C	C	C	C	C	C	
33000	333		K	K	K				S	S	S	B	B				C	C	C	C	C	C	C	C			
39000	393		K	K	K				S	S	S	B	B				C	C	C	C	C	C	C	C			
47000	473		K	K	K				S	S	S	B	B				C	C	C	C	C	C	C	C			
56000	563		K	K					S	S	S	B	B				C	C	C	C	C	C	C	C			
68000	683		K	K					S	S	S	B	B				C	C	C	C	C	C	C	C			
82000	823		K	K					S	S	S	B	B				C	C	C	C	C	C	C				
100000	104	K	K	K					S	S	S	B	B				C	C	C	C	C	C					
120000	124								S	S	B						C	C	C	C	I						
150000	154								S	S	B						C	C	C	C	I						
180000	184								S	S	B						C	C	C	C	I						
220000	224								S	S	B	B					C	C	C	C	I						
270000	274							B	B	B	B						I	I	I	I							
330000	334								B	B	B						I	I	I	I							
390000	394								B	B	B						I	I	I	I							
470000	474							B	B	B	B						I	I	I	I							
560000	564								B	B							I	I	I								
680000	684							B	B	B							I	I	I								
820000	824								B	B							I	I	I								
1000000	105							B	B	B	B						I	I	I	I							
1200000	125																										
1500000	155																I	I	I								
2200000	225																I	I	I	I							
4700000	475																I	I	I	I							
10000000	106																I	I									

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Dimension		1206														1210													
Cap.(pF)	Code	6.3V	10V	16V	25V	50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	10V	16V	25V	50V	100V	200V	250V	500V	630V	1000V	1500V	2000V			
100	101							C	C	C	C	C	C	C															
120	121							C	C	C	C	C	C	C															
150	151		C	C	C	C	C	C	C	C	C	C	C	C															
180	181		C	C	C	C	C	C	C	C	C	C	C	C															
220	221		C	C	C	C	C	C	C	C	C	C	C	C			M	M	M	M	M	M	M	M	M	M			
270	271		C	C	C	C	C	C	C	C	C	C	C	C			M	M	M	M	M	M	M	M	M	M			
330	331		C	C	C	C	C	C	C	C	C	C	C	C			M	M	M	M	M	M	M	M	M	M			
390	391		C	C	C	C	C	C	C	C	C	C	C	C			M	M	M	M	M	M	M	M	M	M			
470	471		C	C	C	C	C	C	C	C	C	C	C	C			M	M	M	M	M	M	M	M	M	M			
560	561		C	C	C	C	C	C	C	C	C	C	C	C			M	M	M	M	M	M	M	M	M	M			
680	681		C	C	C	C	C	C	C	C	C	C	C	C			M	M	M	M	M	M	M	M	M	M			
820	821		C	C	C	C	C	C	C	C	C	C	C	C			M	M	M	M	M	M	M	M	M	M			
1000	102		C	C	C	C	C	C	C	C	C	C	C	X/C	M	M	M	M	M	M	M	M	M	M	C	C			
1200	122		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	E	E			
1500	152		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	E	E			
1800	182		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	E	E			
2200	222		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	F	F/E			
2700	272		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	F	G			
3300	332		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	F	G			
3900	392		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	G	G			
4700	472		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	F/G	F/G			
5600	562		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	G	G*			
6800	682		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	G	G*			
8200	822		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	G	G*			
10000	103		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	C	G			
12000	123		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	C	G			
15000	153		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	M	M	E	G			
18000	183		C	C	C	C	C	C	C	C	C	C	E	E	M	M	M	M	M	M	M	M	C	C	E	G			
22000	223		C	C	C	C	C	C	C	C	E	E	E	E	M	M	M	M	M	M	M	C	C	E	G				
27000	273		C	C	C	C	C	C	C	C	E	E	E	E	M	M	M	M	M	M	M	C	C	E	G				
33000	333		C	C	C	C	C	E	E	E	E	E	E	E	M	M	M	M	M	M	M	E	E	E	G				
39000	393		C	C	C	C	C	E	E	E	E	E	E	E	M	M	M	M	M	M	M	E	E	F					
47000	473		C	C	C	C	C	E	E	E	E	E	E	E	M	M	M	M	M	C	C	E	E	E	G				
56000	563		C	C	C	C	C	E	E	E	E	E	E	E	M	M	M	M	M	C	C	E	E	E					
68000	683		C	C	C	C	C	E	E	E	E	E	E	E	M	M	M	M	M	E	E	F	F						
82000	823		C	C	C	C	C	E	E	E	E	E	E	E	M	M	M	M	M	E	E	F	F						
100000	104		C	C	C	C	C	E	E	E	E	E	E	E	M	M	M	M	M	E	E	F	F						
120000	124		C	C	C	C	C								M	M	M	M	M	E	E	G	G						
150000	154		M	M	M	M	E								M	M	M	M	C	E	E	G	G						
180000	184		M	M	M	M	E								M	M	M	M	C	E	E								
220000	224		M	M	M	M	E	E	E						M	M	M	M	C	C/E	C/E								
270000	274		M	M	M	C	E								M	M	M	M	E	F	F								
330000	334		M	M	M	C	E								M	M	M	C	E	F	F								
390000	394		M	M	J	P	E								M	M	M	C	G	G	G								
470000	474		J	J	J	P	E								M	M	M	C	G	G	G								
560000	564		J	J	J	P	P								C	C	C	C	G	G	G								
680000	684		J	J	J	P	P								C	C	C	C	F	G	G								
820000	824		J	J	J	P	P								C	C	C	C	F										
1000000	105		J	J	J	P	P								C	C	C	C	F										
1200000	125				P	P	E/P																						
1500000	155	J	J	J	P	P	E/P									F	E	G	G										
1800000	185				P	P	P																						
2200000	225	J	J	J	E/P	P	P									F	E	G	G										
2700000	275				P	P																							
3300000	335		P	P	P	P										F	E	G	G										
3900000	395				P	P																							
4700000	475	P	P	P	P	P									F	F	F	G	G										
5600000	565		P	P	P										G	G	G	G											
6800000	685		P	P	P										G	G	G	G											
8200000	825		P	P	P										G	G	G	G											
10000000	106	P	P	P	P										F	F	G	G											
12000000	126														G	G	G												
15000000	156														G	G	G												
18000000	186														G	G	G												
22000000	226		P												G	G	G												

* Surface coating only.

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Dimension		1808							1812												
Cap.(pF)	Code	500V	630V	1000V	1500V	2000V	3000V	4000V	10V 16V 25V	50V	100V	200V	250V	400V	500V	630V	1000V	1500V	2000V	3000V	4000V
100	101																				
120	121																				
150	151	C	C	C	C	C	C	F*													
180	181	C	C	C	C	C	C	F*													
220	221	C	C	C	C	C	C	F*													
270	271	C	C	C	C	C	C	F*	C	C	C	C	C	C	C	C	C	C	C	C	F*
330	331	C	C	C	C	C	C	F*	C	C	C	C	C	C	C	C	C	C	C	C	F*
390	391	C	C	C	C	C	C	F*	C	C	C	C	C	C	C	C	C	C	C	C	F*
470	471	C	C	C	C	C	C	F*	C	C	C	C	C	C	C	C	C	C	C	C	F*
560	561	C	C	C	C	C	E	F*	C	C	C	C	C	C	C	C	C	C	C	C	F*
680	681	C	C	C	C	C	E	F*	C	C	C	C	C	C	C	C	C	C	C	C	F*
820	821	C	C	C	C	C	E	F*	C	C	C	C	C	C	C	C	C	C	C	C	F*
1000	102	C	C	C	C	C	F	F*	C	C	C	C	C	C	C	C	C	C	C	E	F*
1200	122	C	C	C	C	C	F		C	C	C	C	C	C	C	C	C	C	C	F	G*
1500	152	C	C	C	C	C	F		C	C	C	C	C	C	C	C	C	C	C	F	G*
1800	182	C	C	C	C	C	F		C	C	C	C	C	C	C	C	C	C	C	G	G*
2200	222	C	C	C	E	E	F		C	C	C	C	C	C	C	C	C	C	C	G	
2700	272	C	C	C	F	F	F		C	C	C	C	C	C	C	C	C	C	C	G*	
3300	332	C	C	C	F	F	F		C	C	C	C	C	C	C	C	C	E	E	G*	
3900	392	C	C	C	F	F	F*		C	C	C	C	C	C	C	C	C	F	F	G*	
4700	472	C	C	C	F	F	F*		C	C	C	C	C	C	C	C	C	F	F	G*	
5600	562	C	C	C	F	F	F*		C	C	C	C	C	C	C	C	C	G	G		
6800	682	C	C	C	F	F	F*		C	C	C	C	C	C	C	C	C	G	G		
8200	822	C	C	C	F*	F*	F*		C	C	C	C	C	C	C	C	C	G	G		
10000	103	C	C	C	F*	F*	F*		C	C	C	C	C	C	C	C	C	E/F/G	E/F/G		
12000	123	E	E	E					C	C	C	C	C	C	C	C	C	E/F/G	G		
15000	153	E	E	E					C	C	C	C	C	C	C	C	C	E/F/G	G		
18000	183	F	F	F					C	C	C	C	C	C	C	C	E	E/F/G	G		
22000	223	F	F	F					C	C	C	C	C	C	C	C	E	F/G	G		
27000	273	F	F	F					C	C	C	C	C	C	C	C	F				
33000	333	F	F	F					C	C	C	C	C	C	C	C	F				
39000	393	F	F	F					C	C	C	C	C	C	C	C	G				
47000	473	F	F	F					C	C	C	C	C	C	C	C	F/G				
56000	563	F	F	F					C	C	C	C	C	C	E	E	G				
68000	683	F	F						C	C	C	C	C	C	E	E	G				
82000	823	F	F						C	C	C	C	C	C	E	E	G				
100000	104								C	C	C	C	C	C	E	E	G				
120000	124								C	C	C	C	C	C	F	F					
150000	154								C	C	C	C	C	C	F	F					
180000	184								C	C	C	C	C	C	G	G					
220000	224								C	C	C	C	C	C	G	G					
270000	274								C	C	C	E	E	E	G						
330000	334								C	C	C	E	E	E	G						
390000	394								C	C	C	F	F	F	G						
470000	474								C	C	C	F	F	F	G						
560000	564								C	C	C	G	G								
680000	684								C	C	C	G	G								
820000	824								C	C	C	G	G								
1000000	105								C	C	C	G	G								
1200000	125								C	C	C										
1500000	155								C	C	C										
1800000	185								E	E	E										
2200000	225								E	E	E										
2700000	275								F	F	F										
3300000	335								F	F	F										
3900000	395								F	F	F										
4700000	475								G	G	G										
5600000	565								G	G											
6800000	685								G	G											
8200000	825								G	G											
10000000	106								G	G											
12000000	126								G												
15000000	156								G												
18000000	186								GG												
22000000	226																				

* Surface coating only.

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Dimension		1825												2220											
Cap.(pF)	Code	25V 50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	3000V	4000V	25V 50V	100V	200V	250V	400V	500V	630V	1000V	1500V	2000V	3000V	4000V	
100	101																								
120	121																								
150	151																								
180	181																								
220	221																								
270	271											F*												F*	
330	331											F*												F*	
390	391											F*												F*	
470	471											F*												F*	
560	561											F*												F*	
680	681											F*												F*	
820	821											F*												F*	
1000	102	F	F	F	F	F	F	F	F	F	F	F*	F	F	F	F	F	F	F	F	F	F	F	F*	
1200	122	F	F	F	F	F	F	F	F	F	F	G*	F	F	F	F	F	F	F	F	F	F	F	G*	
1500	152	F	F	F	F	F	F	F	F	F	F	G*	F	F	F	F	F	F	F	F	F	F	F	G*	
1800	182	F	F	F	F	F	F	F	F	F	F	G*	F	F	F	F	F	F	F	F	F	F	F	G*	
2200	222	F	F	F	F	F	F	F	F	F	F*		F	F	F	F	F	F	F	F	F	F	F*		
2700	272	F	F	F	F	F	F	F	F	F	F*		F	F	F	F	F	F	F	F	F	F	F*		
3300	332	F	F	F	F	F	F	F	F	F	F*		F	F	F	F	F	F	F	F	F	F	F*		
3900	392	F	F	F	F	F	F	F	F	F	F*		F	F	F	F	F	F	F	F	F	F	F*		
4700	472	F	F	F	F	F	F	F	F	F	F*		F	F	F	F	F	F	F	F	F	F	F*		
5600	562	F	F	F	F	F	F	F	F	F	G*		F	F	F	F	F	F	F	F	F	F	F*		
6800	682	F	F	F	F	F	F	F	F	F	G*		F	F	F	F	F	F	F	F	F	F	G*		
8200	822	F	F	F	F	F	F	F	F	F	G*		F	F	F	F	F	F	F	F	G	G	G*		
10000	103	F	F	F	F	F	F	F	F	F	G*		F	F	F	F	F	F	F	F	F/G	F/G	G*		
12000	123	F	F	F	F	F	F	F	G	G	H*		F	F	F	F	F	F	F	F	G	G	H*		
15000	153	F	F	F	F	F	F	F	G	G	H*		F	F	F	F	F	F	F	F	G	G	H*		
18000	183	F	F	F	F	F	F	F	G	G	H*		F	F	F	F	F	F	F	F	H	H	H*		
22000	223	F	F	F	F	F	F	F	G	G			F	F	F	F	F	F	F	F	H	H			
27000	273	F	F	F	F	F	F	F	H	H			F	F	F	F	F	F	F	F	H	H			
33000	333	F	F	F	F	F	F	F	H	H			F	F	F	F	F	F	F	F	H	H			
39000	393	F	F	F	F	F	F	F	H	H			F	F	F	F	F	F	F	F	H	H			
47000	473	F	F	F	F	F	F	F	H	H			F	F	F	F	F	F	F	F	H	H			
56000	563	F	F	F	F	F	F	F	H				F	F	F	F	F	F	F	F	H	H			
68000	683	F	F	F	F	F	F	F					F	F	F	F	F	F	F	F					
82000	823	F	F	F	F	F	F	F					F	F	F	F	F	F	F	F					
100000	104	F	F	F	F	F	F	G					F	F	F	F	F	F	F	G					
120000	124	F	F	F	F	F	F						F	F	F	F	F	F	F	G					
150000	154	F	F	F	F	F	F						F	F	F	F	F	F	F	H					
180000	184	F	F	F	F	F	F						F	F	F	F	F	F	F	H					
220000	224	F	F	F	F	F	F						F	F	F	F	F	F	F	H					
270000	274	F	F	F	F	F	F						F	F	F	F	F	F	F						
330000	334	F	F	F	F	F	F						F	F	F	F	F	F	F						
390000	394	F	F	F	F	F	F						F	F	F	F	F	F	F						
470000	474	F	F	F	F	F	F						F	F	F	F	F	F	F						
560000	564	F	F	F	F	G	G						F	F	F	F	G	G	G						
680000	684	F	F	F	F								F	F	F	F	G	G	G						
820000	824	F	F	F	F								F	F	F	F	H	H	H						
1000000	105	F	F	F	F								F	F	F	F	H	H	H						
1200000	125	F	F	G									F	F	G	G									
1500000	155	F	F	G									F	F	G	G									
1800000	185	F	F	G									F	F	G	G									
2200000	225	F	F	G									F	F	G	G									
2700000	275	F	F										F	F											
3300000	335	F	F										F	F											
3900000	395	F	F										F	F											
4700000	475	F	F										F	F											
5600000	565	F	F										F	F											
6800000	685	F	F										F	F											
8200000	825	G	G										G	G											
10000000	106	G	G										G	G											
12000000	126												H	F/G											
15000000	156												H	G											
18000000	186												H	H											
22000000	226												H	R											
27000000	276												H												
33000000	336												H												
39000000	396												H												
47000000	476												R												

* Surface coating only.

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Dimension		2225												
Cap.(pF)	Code	25V	50V	100V	200V	250V	500V	630V	1000V	1500V	2000V	3000V	4000V	5000V
100	101													
120	121													
150	151													
180	181													
220	221													
270	271												F*	F*
330	331												F*	F*
390	391												F*	F*
470	471												F*	F*
560	561												F*	F*
680	681												F*	F*
820	821												F*	F*
1000	102	F	F	F	F	F	F	F	F	F	F	F*	F*	F*
1200	122	F	F	F	F	F	F	F	F	F	F	F*	G*	F*
1500	152	F	F	F	F	F	F	F	F	F	F	F*	G*	F*
1800	182	F	F	F	F	F	F	F	F	F	F	F*	G*	F*
2200	222	F	F	F	F	F	F	F	F	F	F	F*		F*
2700	272	F	F	F	F	F	F	F	F	F	F	F*		F*
3300	332	F	F	F	F	F	F	F	F	F	F	F*		F*
3900	392	F	F	F	F	F	F	F	F	F	F	F*		F*
4700	472	F	F	F	F	F	F	F	F	F	F	F*		F/G*
5600	562	F	F	F	F	F	F	F	F	F	F	G*		
6800	682	F	F	F	F	F	F	F	F	F	F	G*		
8200	822	F	F	F	F	F	F	F	F	F	F	G*		
10000	103	F	F	F	F	F	F	F	F	F	F	G*		
12000	123	F	F	F	F	F	F	F	F	G	G	G*		
15000	153	F	F	F	F	F	F	F	F	G	G	G*		
18000	183	F	F	F	F	F	F	F	F	G	G	H*		
22000	223	F	F	F	F	F	F	F	F	F/G	F/G	F*		
27000	273	F	F	F	F	F	F	F	F	G	G			
33000	333	F	F	F	F	F	F	F	F	G	G			
39000	393	F	F	F	F	F	F	F	F	G	H			
47000	473	F	F	F	F	F	F	F	F	G	H			
56000	563	F	F	F	F	F	F	F	F	G	H			
68000	683	F	F	F	F	F	F	F	F	G				
82000	823	F	F	F	F	F	F	F	F	G				
100000	104	F	F	F	F	F	F	F	G	G				
120000	124	F	F	F	F	F	F	F	H					
150000	154	F	F	F	F	F	F	F	H					
180000	184	F	F	F	F	F	F	F	H					
220000	224	F	F	F	F	F	F	F	H					
270000	274	F	F	F	F	F	F	F	F/G/H					
330000	334	F	F	F	F	F	F	F	F/G/H					
390000	394	F	F	F	F	F	F	F						
470000	474	F	F	F	F	F	F	F						
560000	564	F	F	F	F	F	F	F						
680000	684	F	F	F	F	F								
820000	824	F	F	F	F	F								
1000000	105	F	F	F	F	F								
1200000	125	F	F	F	G	G								
1500000	155	F	F	F	G	G								
1800000	185	F	F	F	G	G								
2200000	225	F	F	F	G	G								
2700000	275	F	F	F	G	G								
3300000	335	F	F	F										
3900000	395	F	F	F										
4700000	475	F	F	F										
5600000	565	F	F	F										
6800000	685	F	F	F										
8200000	825	G	G	G										
10000000	106	G	G	G										
12000000	126	F/G												
15000000	156	F/G												
18000000	186													
22000000	226													

* Surface coating only.

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements																																																																																																
1.	Visual and Dimensions	---	* No remarkable defect. * Dimensions to confirm to individual specification sheet.																																																																																																
2.	Capacitance	* Class I : Cap.≤1000pF, 1.0±0.2Vrms, 1MHz±10%. Cap.>1000pF, 1.0±0.2Vrms, 1KHz±10%. * Class II : Cap.≤10μF, 1.0±0.2Vrms, 1KHz±10%**. Cap.>10μF, 0.5±0.2Vrms, 120Hz±20%. ** Test condition: 0.5±0.2Vrms , 1KHz±10% X7R: 0805=106(6.3V), 0603/475(6.3V) X5R: 0201≥224 (6.3V,10V,16V)#1, 0402≥475 (6.3V,16V), 0402≥225(10V), 0603=106 (6.3V) TT18X≥475(10V) , TT15X series X6S: 0201/474(4V),0201≥104 (6.3V,10V#1), 0402≥225 (6.3V), 0402/475 (10V), 0603/106 (6.3V), X7S: 0402/225(6.3V) #1 Excluding X5R/0201/105(6.3V);225(10V), X6S/0201/104(10V) (1.0±0.2Vrms , 1KHz±10%) *Before initial measurement (Class II only) : To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* Shall not exceed the limits given in the detailed spec. * Class I : <table><tr><th>Dielectric</th><th>Rated Vol.(V)</th><th>Q/D.F.</th><th>Remark</th></tr><tr><td rowspan="2">Class I</td><td rowspan="2">All</td><td>Q≥1000</td><td>Cap.≥30pF</td></tr><tr><td>Q≥400+20C</td><td>Cap.<30pF</td></tr></table> * Class II : <table><tr><th>Rated</th><th>D.F.≤</th><th colspan="2">Exception of D.F.≤</th></tr><tr><td rowspan="3">≥100V</td><td rowspan="3">≤2.5%</td><td>≤3.5%</td><td colspan="2">0603≥0.047μF, 0805=0.1μF, 1206≥0.47μF, 1812≥4.7μF, 1825≥4.7μF, 2220≥4.7μF, 2225≥4.7μF</td></tr><tr><td>≤5%</td><td colspan="2">0603≥0.068μF, 0805>0.1μF, 1206>1μF, 1210≥2.2μF</td></tr><tr><td>≤10%</td><td colspan="2">0805>0.22μF, 1210≥3.3μF</td></tr><tr><td rowspan="3">50V</td><td rowspan="3">≤2.5%</td><td>≤3.5%</td><td colspan="2">0201(50V), 0603≥0.047μF, 0805≥0.1μF, 1206≥0.47μF, 1210≥2.2μF, 1812≥4.7μF, 1825≥4.7μF, 2220≥4.7μF, 2225≥4.7μF</td></tr><tr><td>≤5%</td><td colspan="2">0201≥0.01μF, 1210≥4.7μF</td></tr><tr><td>≤10%</td><td colspan="2">0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF</td></tr><tr><td rowspan="3">35V</td><td rowspan="3">≤3.5%</td><td>≤10%</td><td colspan="2">0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td></tr><tr><td>≤5%</td><td colspan="2">0201≥0.01μF, 0805≥1μF, 1210≥10μF</td></tr><tr><td>≤7%</td><td colspan="2">0603≥0.33μF, 1206≥4.7μF</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">≤3.5%</td><td>≤10%</td><td colspan="2">0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF</td></tr><tr><td>≤12.5%</td><td colspan="2">0402≥0.47μF</td></tr><tr><td>≤5%</td><td colspan="2">0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF</td></tr><tr><td rowspan="3">16V</td><td rowspan="3">≤3.5%</td><td>≤10%</td><td colspan="2">0201≥0.1uF(0201/X7R≥0.022μF), 0402≥0.22uF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF</td></tr><tr><td>≤10%</td><td colspan="2">0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF</td></tr><tr><td>≤15%</td><td colspan="2">0201≥0.1μF, 0402≥1μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤5%</td><td>≤10%</td><td colspan="2">0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF</td></tr><tr><td>≤20%</td><td colspan="2">0402≥2.2μF</td></tr><tr><td>---</td><td colspan="2">---</td></tr><tr><td rowspan="3">6.3V</td><td rowspan="3">≤10%</td><td>≤15%</td><td colspan="2">0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF</td></tr><tr><td>≤20%</td><td colspan="2">0402≥2.2μF</td></tr><tr><td>---</td><td colspan="2">---</td></tr><tr><td rowspan="3">4V</td><td rowspan="3">≤15%</td><td>---</td><td colspan="2">---</td></tr></table>	Dielectric	Rated Vol.(V)	Q/D.F.	Remark	Class I	All	Q≥1000	Cap.≥30pF	Q≥400+20C	Cap.<30pF	Rated	D.F.≤	Exception of D.F.≤		≥100V	≤2.5%	≤3.5%	0603≥0.047μF, 0805=0.1μF, 1206≥0.47μF, 1812≥4.7μF, 1825≥4.7μF, 2220≥4.7μF, 2225≥4.7μF		≤5%	0603≥0.068μF, 0805>0.1μF, 1206>1μF, 1210≥2.2μF		≤10%	0805>0.22μF, 1210≥3.3μF		50V	≤2.5%	≤3.5%	0201(50V), 0603≥0.047μF, 0805≥0.1μF, 1206≥0.47μF, 1210≥2.2μF, 1812≥4.7μF, 1825≥4.7μF, 2220≥4.7μF, 2225≥4.7μF		≤5%	0201≥0.01μF, 1210≥4.7μF		≤10%	0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF		35V	≤3.5%	≤10%	0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF		≤5%	0201≥0.01μF, 0805≥1μF, 1210≥10μF		≤7%	0603≥0.33μF, 1206≥4.7μF		25V	≤3.5%	≤10%	0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF		≤12.5%	0402≥0.47μF		≤5%	0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF		16V	≤3.5%	≤10%	0201≥0.1uF(0201/X7R≥0.022μF), 0402≥0.22uF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF		≤10%	0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF		≤15%	0201≥0.1μF, 0402≥1μF		10V	≤5%	≤10%	0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF		≤20%	0402≥2.2μF		---	---		6.3V	≤10%	≤15%	0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF		≤20%	0402≥2.2μF		---	---		4V	≤15%	---	---	
Dielectric	Rated Vol.(V)	Q/D.F.	Remark																																																																																																
Class I	All	Q≥1000	Cap.≥30pF																																																																																																
		Q≥400+20C	Cap.<30pF																																																																																																
Rated	D.F.≤	Exception of D.F.≤																																																																																																	
≥100V	≤2.5%	≤3.5%	0603≥0.047μF, 0805=0.1μF, 1206≥0.47μF, 1812≥4.7μF, 1825≥4.7μF, 2220≥4.7μF, 2225≥4.7μF																																																																																																
		≤5%	0603≥0.068μF, 0805>0.1μF, 1206>1μF, 1210≥2.2μF																																																																																																
		≤10%	0805>0.22μF, 1210≥3.3μF																																																																																																
50V	≤2.5%	≤3.5%	0201(50V), 0603≥0.047μF, 0805≥0.1μF, 1206≥0.47μF, 1210≥2.2μF, 1812≥4.7μF, 1825≥4.7μF, 2220≥4.7μF, 2225≥4.7μF																																																																																																
		≤5%	0201≥0.01μF, 1210≥4.7μF																																																																																																
		≤10%	0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF																																																																																																
35V	≤3.5%	≤10%	0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF																																																																																																
		≤5%	0201≥0.01μF, 0805≥1μF, 1210≥10μF																																																																																																
		≤7%	0603≥0.33μF, 1206≥4.7μF																																																																																																
25V	≤3.5%	≤10%	0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF																																																																																																
		≤12.5%	0402≥0.47μF																																																																																																
		≤5%	0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF																																																																																																
16V	≤3.5%	≤10%	0201≥0.1uF(0201/X7R≥0.022μF), 0402≥0.22uF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF																																																																																																
		≤10%	0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF																																																																																																
		≤15%	0201≥0.1μF, 0402≥1μF																																																																																																
10V	≤5%	≤10%	0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF																																																																																																
		≤20%	0402≥2.2μF																																																																																																
		---	---																																																																																																
6.3V	≤10%	≤15%	0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF																																																																																																
		≤20%	0402≥2.2μF																																																																																																
		---	---																																																																																																
4V	≤15%	---	---																																																																																																
		3.	Q/D.F. (Dissipation Factor)																																																																																																
		4.	Temperature Coefficient	* With no electrical load. <table><tr><th>T.C.</th><th>Operating Temp.</th></tr><tr><td>C0G</td><td>-55~125°C at 25°C</td></tr><tr><td>X7R</td><td>-55~125°C at 25°C</td></tr></table> * Measurement voltage for Class II : <table><tr><th>Size</th><th>Cap. Range</th><th>Condition</th></tr><tr><td rowspan="3">0201</td><td>Cap.<0.1μF</td><td>1V</td></tr><tr><td>0.1μF≤Cap.<1μF</td><td>0.2V</td></tr><tr><td>Cap.≥1μF</td><td>0.1V</td></tr><tr><td rowspan="4">0402</td><td>Cap.<0.1μF</td><td>1V</td></tr><tr><td>Cap.=1μF</td><td>0.5V</td></tr><tr><td>1μF<Cap.<10μF</td><td>0.2V</td></tr><tr><td>Cap.≥10μF</td><td>0.1V</td></tr><tr><td rowspan="3">0603</td><td>Cap.≤1μF</td><td>1V</td></tr><tr><td>1μF<Cap.≤4.7μF</td><td>0.5V</td></tr><tr><td>Cap.>4.7μF</td><td>0.2V</td></tr><tr><td rowspan="3">0805</td><td>Cap.<10μF</td><td>1V</td></tr><tr><td>Cap.=10μF</td><td>0.5V</td></tr><tr><td>Cap.>10μF</td><td>0.2V</td></tr><tr><td rowspan="3">1206/1210</td><td>Cap.≤10μF</td><td>1V</td></tr><tr><td>10μF<Cap.≤100μF</td><td>0.5V</td></tr><tr><td>Cap.>100μF</td><td>0.2V</td></tr></table>	T.C.	Operating Temp.	C0G	-55~125°C at 25°C	X7R	-55~125°C at 25°C	Size	Cap. Range	Condition	0201	Cap.<0.1μF	1V	0.1μF≤Cap.<1μF	0.2V	Cap.≥1μF	0.1V	0402	Cap.<0.1μF	1V	Cap.=1μF	0.5V	1μF<Cap.<10μF	0.2V	Cap.≥10μF	0.1V	0603	Cap.≤1μF	1V	1μF<Cap.≤4.7μF	0.5V	Cap.>4.7μF	0.2V	0805	Cap.<10μF	1V	Cap.=10μF	0.5V	Cap.>10μF	0.2V	1206/1210	Cap.≤10μF	1V	10μF<Cap.≤100μF	0.5V	Cap.>100μF	0.2V	<table><tr><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>C0G</td><td>Within ±30ppm/°C</td></tr><tr><td>X7R</td><td>Within ±15%</td></tr></table>	T.C.	Capacitance Change	C0G	Within ±30ppm/°C	X7R	Within ±15%																																										
T.C.	Operating Temp.																																																																																																		
C0G	-55~125°C at 25°C																																																																																																		
X7R	-55~125°C at 25°C																																																																																																		
Size	Cap. Range	Condition																																																																																																	
0201	Cap.<0.1μF	1V																																																																																																	
	0.1μF≤Cap.<1μF	0.2V																																																																																																	
	Cap.≥1μF	0.1V																																																																																																	
0402	Cap.<0.1μF	1V																																																																																																	
	Cap.=1μF	0.5V																																																																																																	
	1μF<Cap.<10μF	0.2V																																																																																																	
	Cap.≥10μF	0.1V																																																																																																	
0603	Cap.≤1μF	1V																																																																																																	
	1μF<Cap.≤4.7μF	0.5V																																																																																																	
	Cap.>4.7μF	0.2V																																																																																																	
0805	Cap.<10μF	1V																																																																																																	
	Cap.=10μF	0.5V																																																																																																	
	Cap.>10μF	0.2V																																																																																																	
1206/1210	Cap.≤10μF	1V																																																																																																	
	10μF<Cap.≤100μF	0.5V																																																																																																	
	Cap.>100μF	0.2V																																																																																																	
T.C.	Capacitance Change																																																																																																		
C0G	Within ±30ppm/°C																																																																																																		
X7R	Within ±15%																																																																																																		

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements																											
5.	Insulation Resistance		<table><tr><th>Dielectric</th><th>Capacitance Change</th></tr><tr><td>Class I</td><td>$\geq 10G\Omega$ or $RxC \geq 500\Omega \cdot F$, whichever is smaller</td></tr><tr><td>Class II</td><td>$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$, whichever is smaller</td></tr></table> * Except (Class II) : <table><tr><th>Rated voltage (X7R)</th><th>I.R.</th></tr><tr><td>$\geq 100V$: All X7R</td><td rowspan="5">$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$, whichever is smaller</td></tr><tr><td>50V : 0402$\geq 0.01\mu F$, 0603$\geq 1\mu F$, 0805$\geq 1\mu F$, 1206$\geq 4.7\mu F$, 1210$\geq 4.7\mu F$, 1812$\geq 10\mu F$, 2220$\geq 22\mu F$</td></tr><tr><td>35V : 0805$\geq 2.2\mu F$, 1206$\geq 2.2\mu F$, 1210$\geq 10\mu F$</td></tr><tr><td>25V : 0402$\geq 1\mu F$, 0603$\geq 2.2\mu F$, 0805$\geq 2.2\mu F$, 1206$\geq 10\mu F$, 1210$\geq 10\mu F$</td></tr><tr><td>16V : 0201$\geq 0.1\mu F$, 0402$\geq 0.22\mu F$, 0603$\geq 1\mu F$, 0805$\geq 2.2\mu F$, 1206$\geq 10\mu F$, 1210$\geq 47\mu F$</td></tr><tr><td>10V : 0201$\geq 47nF$, 0402$\geq 0.47\mu F$, 0603$\geq 0.47\mu F$, 0805$\geq 2.2\mu F$, 1206$\geq 4.7\mu F$, 1210$\geq 47\mu F$</td><td rowspan="5">$RxC \geq 50\Omega \cdot F$</td></tr><tr><td>6.3V; 4V</td></tr><tr><td>Rated voltage (X7R)</td></tr><tr><td>100V : 1210$\geq 3.3\mu F$</td></tr><tr><td>50V : 0402$\geq 0.1\mu F$, 0603$\geq 2.2\mu F$, 0805$\geq 10\mu F$, 1206$\geq 10\mu F$</td></tr><tr><td>35V : 0603$\geq 1\mu F$</td><td rowspan="5">$RxC \geq 50\Omega \cdot F$</td></tr><tr><td>25V : 0201$\geq 0.1\mu F$, 0402$\geq 2.2\mu F$, 0603$\geq 10\mu F$, 0805$\geq 10\mu F$, 1206$\geq 22\mu F$</td></tr><tr><td>16V : 0603$\geq 10\mu F$, 0402$\geq 1\mu F$, 0201$\geq 0.22\mu F$</td></tr><tr><td>10V : 0201$\geq 0.1\mu F$, 0402$\geq 1\mu F$, 0603$\geq 10\mu F$, 0805$\geq 47\mu F$</td></tr><tr><td>6.3V : 0201$\geq 0.1\mu F$, 0603$\geq 4.7\mu F$, 0805$\geq 47\mu F$, 1206$\geq 10\mu F$</td></tr><tr><td>4V : 0603$\geq 22\mu F$, 0805$\geq 47\mu F$, 1206$\geq 100\mu F$</td></tr></table>	Dielectric	Capacitance Change	Class I	$\geq 10G\Omega$ or $RxC \geq 500\Omega \cdot F$, whichever is smaller	Class II	$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$, whichever is smaller	Rated voltage (X7R)	I.R.	$\geq 100V$: All X7R	$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$, whichever is smaller	50V : 0402 $\geq 0.01\mu F$, 0603 $\geq 1\mu F$, 0805 $\geq 1\mu F$, 1206 $\geq 4.7\mu F$, 1210 $\geq 4.7\mu F$, 1812 $\geq 10\mu F$, 2220 $\geq 22\mu F$	35V : 0805 $\geq 2.2\mu F$, 1206 $\geq 2.2\mu F$, 1210 $\geq 10\mu F$	25V : 0402 $\geq 1\mu F$, 0603 $\geq 2.2\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 10\mu F$, 1210 $\geq 10\mu F$	16V : 0201 $\geq 0.1\mu F$, 0402 $\geq 0.22\mu F$, 0603 $\geq 1\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 10\mu F$, 1210 $\geq 47\mu F$	10V : 0201 $\geq 47nF$, 0402 $\geq 0.47\mu F$, 0603 $\geq 0.47\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 4.7\mu F$, 1210 $\geq 47\mu F$	$RxC \geq 50\Omega \cdot F$	6.3V; 4V	Rated voltage (X7R)	100V : 1210 $\geq 3.3\mu F$	50V : 0402 $\geq 0.1\mu F$, 0603 $\geq 2.2\mu F$, 0805 $\geq 10\mu F$, 1206 $\geq 10\mu F$	35V : 0603 $\geq 1\mu F$	$RxC \geq 50\Omega \cdot F$	25V : 0201 $\geq 0.1\mu F$, 0402 $\geq 2.2\mu F$, 0603 $\geq 10\mu F$, 0805 $\geq 10\mu F$, 1206 $\geq 22\mu F$	16V : 0603 $\geq 10\mu F$, 0402 $\geq 1\mu F$, 0201 $\geq 0.22\mu F$	10V : 0201 $\geq 0.1\mu F$, 0402 $\geq 1\mu F$, 0603 $\geq 10\mu F$, 0805 $\geq 47\mu F$	6.3V : 0201 $\geq 0.1\mu F$, 0603 $\geq 4.7\mu F$, 0805 $\geq 47\mu F$, 1206 $\geq 10\mu F$	4V : 0603 $\geq 22\mu F$, 0805 $\geq 47\mu F$, 1206 $\geq 100\mu F$
		Dielectric	Capacitance Change																											
		Class I	$\geq 10G\Omega$ or $RxC \geq 500\Omega \cdot F$, whichever is smaller																											
		Class II	$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$, whichever is smaller																											
		Rated voltage (X7R)	I.R.																											
		$\geq 100V$: All X7R	$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$, whichever is smaller																											
		50V : 0402 $\geq 0.01\mu F$, 0603 $\geq 1\mu F$, 0805 $\geq 1\mu F$, 1206 $\geq 4.7\mu F$, 1210 $\geq 4.7\mu F$, 1812 $\geq 10\mu F$, 2220 $\geq 22\mu F$																												
		35V : 0805 $\geq 2.2\mu F$, 1206 $\geq 2.2\mu F$, 1210 $\geq 10\mu F$																												
		25V : 0402 $\geq 1\mu F$, 0603 $\geq 2.2\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 10\mu F$, 1210 $\geq 10\mu F$																												
		16V : 0201 $\geq 0.1\mu F$, 0402 $\geq 0.22\mu F$, 0603 $\geq 1\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 10\mu F$, 1210 $\geq 47\mu F$																												
10V : 0201 $\geq 47nF$, 0402 $\geq 0.47\mu F$, 0603 $\geq 0.47\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 4.7\mu F$, 1210 $\geq 47\mu F$	$RxC \geq 50\Omega \cdot F$																													
6.3V; 4V																														
Rated voltage (X7R)																														
100V : 1210 $\geq 3.3\mu F$																														
50V : 0402 $\geq 0.1\mu F$, 0603 $\geq 2.2\mu F$, 0805 $\geq 10\mu F$, 1206 $\geq 10\mu F$																														
35V : 0603 $\geq 1\mu F$	$RxC \geq 50\Omega \cdot F$																													
25V : 0201 $\geq 0.1\mu F$, 0402 $\geq 2.2\mu F$, 0603 $\geq 10\mu F$, 0805 $\geq 10\mu F$, 1206 $\geq 22\mu F$																														
16V : 0603 $\geq 10\mu F$, 0402 $\geq 1\mu F$, 0201 $\geq 0.22\mu F$																														
10V : 0201 $\geq 0.1\mu F$, 0402 $\geq 1\mu F$, 0603 $\geq 10\mu F$, 0805 $\geq 47\mu F$																														
6.3V : 0201 $\geq 0.1\mu F$, 0603 $\geq 4.7\mu F$, 0805 $\geq 47\mu F$, 1206 $\geq 10\mu F$																														
4V : 0603 $\geq 22\mu F$, 0805 $\geq 47\mu F$, 1206 $\geq 100\mu F$																														
6.	Dielectric Strength	<table><tr><th>Rated Voltage</th><th>Condition</th></tr><tr><td>≤ 100</td><td>2.5 times of U_R</td></tr><tr><td>$100 < V \leq 250$</td><td>2.0 times of U_R</td></tr><tr><td>$250 < V \leq 500$</td><td>1.5 times of U_R</td></tr><tr><td>$630 \leq V \leq 3000V$</td><td>1.2 times of U_R</td></tr><tr><td>$3000 < V < 5000V$</td><td>1.1 times of U_R</td></tr><tr><td>$\geq 5000V$</td><td>1.0 times of U_R</td></tr></table> * Duration : 1 to 5 sec. Voltage ramp up rate $\leq 500Vdc/sec$. * Charge and discharge current less than 50mA. * Test in insulating fluid for rated voltage $\geq 1KV$ products.	Rated Voltage	Condition	≤ 100	2.5 times of U_R	$100 < V \leq 250$	2.0 times of U_R	$250 < V \leq 500$	1.5 times of U_R	$630 \leq V \leq 3000V$	1.2 times of U_R	$3000 < V < 5000V$	1.1 times of U_R	$\geq 5000V$	1.0 times of U_R	* No evidence of damage or flash over during test.													
		Rated Voltage	Condition																											
		≤ 100	2.5 times of U_R																											
		$100 < V \leq 250$	2.0 times of U_R																											
		$250 < V \leq 500$	1.5 times of U_R																											
		$630 \leq V \leq 3000V$	1.2 times of U_R																											
		$3000 < V < 5000V$	1.1 times of U_R																											
		$\geq 5000V$	1.0 times of U_R																											
		7.	Solderability	* Solder temperature : $235 \pm 5^{\circ}C$ for (0402~1210). * Solder temperature : $245 \pm 5^{\circ}C$ for (1808~2225). * Dipping time : 2 ± 0.5 sec.	* 75% min. coverage of all metalized area.																									
				8.	Resistance to Soldering Heat	* Solder temperature : $260 \pm 5^{\circ}C$. * Dipping time : 10 ± 1 sec. * Preheating : 120 to $150^{\circ}C$ for 1 minute before immerse the capacitor in a eutectic solder. * Before initial measurement (Class II only) : To apply de-aging at $150^{\circ}C$ for 1hr then set for 24 ± 2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24 ± 2 hrs (Class I) or 48 ± 4 hrs (Class II).	* No remarkable damage. * Cap. change : C0G : Within $\pm 2.5\%$ or $\pm 0.25pF$, whichever is larger. X7R : Within $\pm 7.5\%$. * D.F./Q, I.R. : To meet initial requirements. * 25% max. leaching on each edge.																							
9.	Temperature Cycle					* Conduct the five cycles according to the temperatures and time. <table><tr><th>Step</th><th>Temp.($^{\circ}C$)</th><th>Time(min.)</th></tr><tr><td>1</td><td>Min. operating temp. $+0/-3$</td><td>30 ± 3</td></tr><tr><td>2</td><td>Room temp.</td><td>$2 \sim 3$</td></tr><tr><td>3</td><td>Max. operating temp. $+3/-0$</td><td>30 ± 3</td></tr><tr><td>4</td><td>Room temp.</td><td>$2 \sim 3$</td></tr></table> * Before initial measurement (Class II only) : To apply de-aging at $150^{\circ}C$ for 1hr then set for 24 ± 2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24 ± 2 hrs (Class I) or 48 ± 4 hrs (Class II).	Step	Temp.($^{\circ}C$)	Time(min.)	1	Min. operating temp. $+0/-3$	30 ± 3	2	Room temp.	$2 \sim 3$	3	Max. operating temp. $+3/-0$	30 ± 3	4	Room temp.	$2 \sim 3$	* No remarkable damage. * Cap. change : C0G : Within $\pm 2.5\%$ or $\pm 0.25pF$, whichever is larger. X7R : Within $\pm 7.5\%$. * D.F./Q : C0G : $Q \geq 100\%$ of initial requirements. X7R : D.F. $\leq 150\%$ of initial requirement. * I.R. : $\geq 100\%$ of initial requirement.								
		Step	Temp.($^{\circ}C$)	Time(min.)																										
		1	Min. operating temp. $+0/-3$	30 ± 3																										
		2	Room temp.	$2 \sim 3$																										
		3	Max. operating temp. $+3/-0$	30 ± 3																										
4	Room temp.	$2 \sim 3$																												



8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements										
10.	Humidity (Damp Heat) Steady State	* Test temp. : 40±2°C. * Humidity : 90~95%RH. * Test time : 500 +24/-0hrs. * Before initial measurement (Class II only) : To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).	* No remarkable damage. * Cap. change : C0G : Within ±5.0% or ±0.5pF, whichever is larger. X7R : Within ±12.5% for ≥10V**, within ±25% for 6.3V. **10V : Within ±25% for 0603≥4.7μF, 0402≥1μF. * D.F./Q : C0G : Q≥350 for Cap.>30pF, Q≥275+2.5C for 10pF≤Cap.≤30pF, Q≥200+10C for Cap.<10pF. X7R : D.F.≤200% of initial requirement. * I.R. : ≥10V, ≥1GΩ or R×C≥50Ω-F, whichever is smaller. Except : <table><tr><th>Rated voltage</th><th>I.R.</th></tr><tr><td>100V : All X7R; 1210≥3.3μF</td><td rowspan="7">≥1GΩ or RxC≥10Ω-F, whichever is smaller</td></tr><tr><td>50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF</td></tr><tr><td>35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td></tr><tr><td>25V : 0201≥0.1uF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF</td></tr><tr><td>16V : 0201≥0.1uF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF</td></tr><tr><td>10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td></tr></table>	Rated voltage	I.R.	100V : All X7R; 1210≥3.3μF	≥1GΩ or RxC≥10Ω-F, whichever is smaller	50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF	35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF	25V : 0201≥0.1uF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF	16V : 0201≥0.1uF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF	10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF	6.3V; 4V; Size≥1812
			Rated voltage	I.R.									
100V : All X7R; 1210≥3.3μF	≥1GΩ or RxC≥10Ω-F, whichever is smaller												
50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF													
35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF													
25V : 0201≥0.1uF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF													
16V : 0201≥0.1uF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF													
10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF													
6.3V; 4V; Size≥1812													
11.	Humidity (Damp Heat) Load	* Reflow solder the capacitors on a P.C. Board before test. * Test temp. : 40±2°C (85±3°C for control code H). * Humidity : 90~95% RH (85±5% for control code H). * Test time : 500 +24/-0hrs. * To apply voltage : Rated voltage (500Vdc max. for general purpose and 100Vdc max. for control code H) * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).	* No remarkable damage. * Cap. change : C0G : Within ±7.5% or ±0.75pF, whichever is larger. X7R : Within ±12.5% for ≥10V**, within ±25% for 6.3V. **10V : Within ±25% for 0603≥4.7μF, 0402≥1μF. * D.F./Q : C0G : Q≥350 for Cap.>30pF, Q≥275+2.5C for 10pF≤Cap.≤30pF, Q≥200+10C for Cap.<10pF. X7R : ≤200% of initial requirement. * I.R. : ≥10V, ≥500MΩ or RxC≥25Ω-F, whichever is smaller. Except : <table><tr><th>Rated voltage</th><th>I.R.</th></tr><tr><td>≥100V : All X7R; 1210≥3.3μF</td><td rowspan="7">≥500MΩ or RxC≥5Ω-F, whichever is smaller</td></tr><tr><td>50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF</td></tr><tr><td>35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td></tr><tr><td>25V : 0201≥0.1uF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF</td></tr><tr><td>16V : 0201≥0.1uF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF</td></tr><tr><td>10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF</td></tr><tr><td>6.3V; 4V; Size≥1812</td></tr></table>	Rated voltage	I.R.	≥100V : All X7R; 1210≥3.3μF	≥500MΩ or RxC≥5Ω-F, whichever is smaller	50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF	35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF	25V : 0201≥0.1uF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF	16V : 0201≥0.1uF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF	10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF	6.3V; 4V; Size≥1812
			Rated voltage	I.R.									
≥100V : All X7R; 1210≥3.3μF	≥500MΩ or RxC≥5Ω-F, whichever is smaller												
50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF													
35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF													
25V : 0201≥0.1uF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF													
16V : 0201≥0.1uF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF													
10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF													
6.3V; 4V; Size≥1812													

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements
12.	High Temperature Load (Endurance)	* Test temp. : 125±3°C.	* No remarkable damage.
		* To apply voltage :	* Cap. change :
		(1) ≤6.3V or Cap.≥10μF : 150% of rated voltage.	C0G : Within ±5.0% or ±0.5pF, whichever is larger.
		(2) 10V≤Ur≤100V : 200% of rated voltage.	X7R : Within ±12.5% for ≥10V**, within ±25% for 6.3V.
		(3) 200V≤Ur≤500V : 150% of rated voltage.	**10V : Within ±25% for 0603≥4.7μF, 0402≥1μF.
		(4) 630V : 120% of rated voltage.	* D.F./Q :
		(5) Ur≥1000V : 100% of rated voltage.	C0G : Q≥350 for Cap.>30pF, Q≥275+2.5C for 10pF≤Cap.≤30pF, Q≥200+10C for Cap.<10pF.
		(6) 100% of rated voltage for below range :	X7R : D.F.≤200% of initial requirement.
			* I.R. : ≥10V, ≥1GΩ or R×C≥50Ω-F, whichever is smaller.
			Except :

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

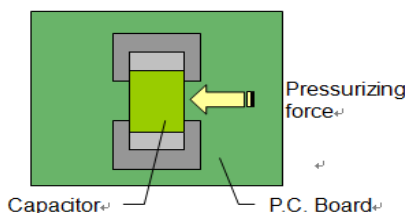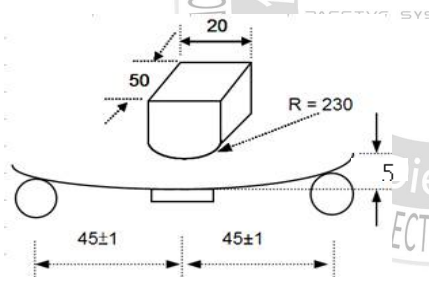No.	Item	Test Condition	Requirements						
13.	Adhesive Strength of Termination	* Capacitors mounted on a substrate. A force of 5N(≤ 0603) or 10N(>0603) applied perpendicular to the place of substrate and parallel the line joining the center of terminations for 10 ± 1 second.  Capacitor P.C. Board	* No remarkable damage or removal of the terminations.						
14.	Bending Test	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1mm per second until the deflection becomes 5mm for product size < 1808, 3mm for product size ≥ 1808.  Unit : mm	* No remarkable damage. <table><tr><th>Dielectric</th><th>Cap. Change</th></tr><tr><td>Class I (C0G)</td><td>Within $\pm 5.0\%$ or $\pm 0.5\text{pF}$, whichever is larger</td></tr><tr><td>Class II (X7R)</td><td>Within $\pm 12.5\%$</td></tr></table> (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test)	Dielectric	Cap. Change	Class I (C0G)	Within $\pm 5.0\%$ or $\pm 0.5\text{pF}$, whichever is larger	Class II (X7R)	Within $\pm 12.5\%$
Dielectric	Cap. Change								
Class I (C0G)	Within $\pm 5.0\%$ or $\pm 0.5\text{pF}$, whichever is larger								
Class II (X7R)	Within $\pm 12.5\%$								
15.	Vibration Resistance	* Vibration frequency : 10~55 Hz/min. * Total amplitude : 1.5mm. * Test time : 6 hrs. (Two hrs each in three mutually perpendicular directions) * Before initial measurement (Class II only) : To apply de-aging at 150°C for 1hr then set for 24 ± 2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24 ± 2 hrs (Class I) or 48 ± 4 hrs (Class II).	* No remarkable damage. * Cap. change and D.F./Q : To meet initial spec.						

9. PACKAGE DIMENSION AND QUANTITY

Size	Thickness (mm)	Paper tape		Plastic tape	
		7" reel	13" reel	7" reel	13" reel
0402(1005)	0.50±0.05	10k	50k	-	-
	0.50 +0.02/-0.05	10k	50k	-	-
	0.50±0.20	10k	-	-	-
0603(1608)	0.50±0.10	4k	-	-	-
	0.80±0.07	4k	15k	-	-
	0.80 +0.15/-0.10	4k	15k	-	-
0805(2012)	0.50±0.10	4k	15k	-	-
	0.60±0.10	4k	15k	-	-
	0.80±0.10	4k	15k	-	-
	0.85±0.10	4k	15k	-	-
	1.25±0.10	-	-	3k	10k
	1.25±0.20	-	-	3k	10k
1206(3216)	0.80±0.10	4k	15k	-	-
	0.85±0.10	4k	15k	-	-
	0.95±0.10	-	-	3k	10k
	1.15±0.15	-	-	3k	10k
	1.25±0.10	-	-	3k	10k
	1.60±0.20	-	-	2k	10k
	1.60 +0.30/-0.10	-	-	2k	9k
1210(3225)	0.85±0.10	-	-	3k	10k
	0.95±0.10	-	-	3k	10k
	1.25±0.10	-	-	3k	10k
	1.60±0.20	-	-	2k	-
	2.00±0.20	-	-	1k	6k
	2.50±0.30	-	-	1k	6k
1808(4520)	1.25±0.10	-	-	2k	10k
	1.60±0.20	-	-	2k	8k
	2.00±0.20	-	-	1k	6k
1812(4532)	1.25±0.10	-	-	1k	5k
	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	3k
	2.80±0.30	-	-	0.5k	-
1825(4563)	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
	2.80±0.30	-	-	0.5k	-
2220(5750)	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
	2.80±0.30	-	-	0.5k	-
	3.10±0.30	-	-	-	1k
2225(5763)	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
	2.80±0.30	-	-	0.5k	-

Unit : pcs

9. PACKAGE DIMENSION AND QUANTITY

9.1. EMBOSSED TAPE DIMENSIONS

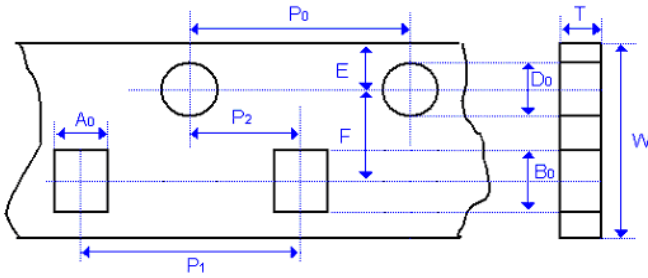


Fig. 9.1 The dimension of paper tape

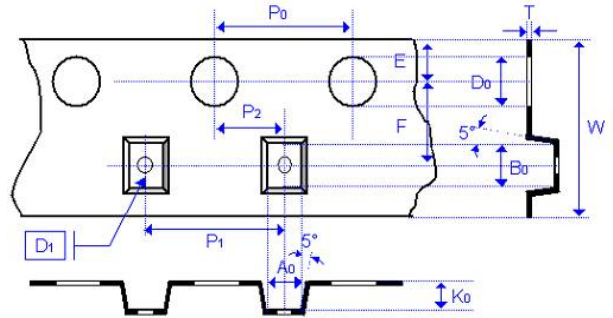


Fig. 9.2 The dimension of plastic tape

Size	0402		0603		0805	
Chip Thickness	0.50±0.05	0.50±0.10	0.80±0.07	0.80 +0.15/-0.1	0.80±0.10	1.25±0.10 1.25±0.20
A ₀	0.70±0.20	0.70±0.20	1.00 +0.05/-0.1	1.02 +0.05/-0.1	1.50±0.10	<1.65
B ₀	1.20±0.20	1.20±0.20	1.80±0.10	1.80±0.10	2.30±0.10	<2.40
T	≤0.80	≤0.80	0.95±0.05	0.97±0.05	0.95±0.05	0.23±0.05
K ₀	-	-	-	-	-	<2.50
W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.10	40.00±0.10	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20
P ₁	2.00±0.05	2.00±0.05	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.50 +0.10/-0
D ₁	-	-	-	-	-	1.00±0.10
E	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.10
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05
Unit :	mm	mm	mm	mm	mm	mm

Size	1206			1210		1808	
Chip Thickness	0.80±0.10	0.95±0.10 1.25±0.10	1.60±0.20 1.60+0.3/-0.1	0.95±0.10 1.25±0.10 1.60±0.20	2.50±0.30	1.25±0.10 1.60±0.20	2.00±0.20
A ₀	2.00±0.10	<2.00	<2.50	<3.05	<3.20	<2.50	<2.50
B ₀	3.50±0.50	<3.70	<4.00	<3.80	<4.00	<5.30	<5.30
T	0.95±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.25±0.05	0.25±0.05
K ₀	-	<2.50	<2.50	<2.50	<3.50	<2.50	<2.50
W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	12.00±0.20	12.00±0.20
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.0±0.20	40.0±0.20
P ₁	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50±0.10/-0	1.50+0.10/-0
D ₁	-	1.00±0.10	1.50±0.10	1.00±0.10	1.00±0.10	1.50±0.10	1.50±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	3.50±0.05	3.50±0.05	5.50±0.05	3.50±0.05	3.50±0.05	5.50±0.05	5.50±0.05
Unit :	mm	mm	mm	mm	mm	mm	mm

9. PACKAGE DIMENSION AND QUANTITY

Size	1812		1825		2220		
Chip Thickness	1.25±0.10 1.60±0.20 2.00±0.20	2.50±0.30 2.80±0.30	1.60±0.20 2.00±0.20	2.50±0.30 2.80±0.30	1.40±0.15 1.60±0.20 2.00±0.20	2.50±0.30 2.80±0.30	3.10±0.30
A ₀	<3.90	<3.90	<6.80	<6.80	<5.80	<6.80	<5.60
B ₀	<5.30	<5.30	<5.30	<5.30	<6.50	<6.50	<6.50
T	0.25±0.05	0.25±0.05	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10
K ₀	<2.50	<3.00	<2.50	<3.10	<2.50	<3.10	<4.20
W	12.00±0.20	12.00±0.20	12.00±0.20	12.00±0.20	12.00±0.20	12.00±0.20	12.00±0.20
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20
P ₁	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0
D ₁	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05
Unit :	mm	mm	mm	mm	mm	mm	mm

Size	2225	
Chip Thickness	1.60±0.20 2.00±0.20	2.50±0.30 2.80±0.30
A ₀	<6.80	<6.80
B ₀	<6.50	<6.50
T	0.30±0.10	0.30±0.10
K ₀	<2.50	<3.10
W	12.00±0.20	12.00±0.20
P ₀	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.20	40.00±0.20
P ₁	8.00±0.10	8.00±0.10
P ₂	2.00±0.05	2.00±0.05
D ₀	1.50 +0.10/-0	1.50 +0.10/-0
D ₁	1.50±0.10	1.50±0.10
E	1.75±0.10	1.75±0.10
F	5.50±0.05	5.50±0.05
Unit :	mm	mm