

Features


- Excellent power handling
- small size
- Low loss
- temperature stable
- LTCC construction , and has good moisture resistance, corrosion resistance, high reliability.

Applications


- Harmonic Rejection
- VHF/UHF transmitters / receivers
- Base Station/Micro base station of Mobile Communication, Internet of things terminal, lab use.

Electrical Specifications at 25°C

Parameter		Frequency(MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-1000	-	0.9	1.8	dB
	Freq.Cut-Off	1240	-	3.0	-	dB
	Return Loss	DC-1000	-	21	-	dB
Stop Band	Rejection Loss	1550-1900	20	-	-	dB
		1900-3000	-	35	-	dB
		3000-6000	-	30	-	dB
		6000-10000	-	30	-	dB

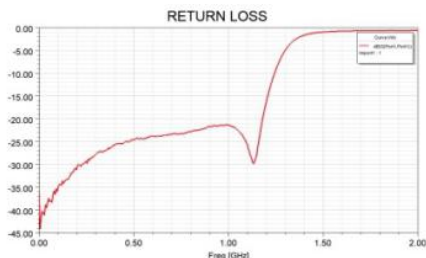

Suggested PCB Layout

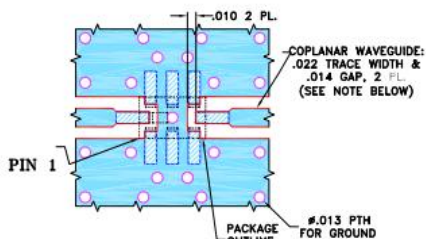

NOTES:


1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" $\pm$.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

JY-LFCG-1000+



50Ω DC to 1000 MHz

Functional Schematic



Maximum Ratings


Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	5.5 W max. @25°C

* Passband rating, derate linearly to 1W at 125°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Pad Connections

INPUT	8
OUTPUT	4
GROUND	1,2,3,5,6,7

Outline Drawing



Outline Dimensions: Unit (mm)

A	2.00	E	0.30
B	1.25	F	0.30
C	0.95	G	0.65
D	0.35	wt	0.002g