




PART NO. AND CH. CODE	③ W ₁ ±0.4	③ W ₂ ±0.4	③ H ₁	③ H ₂	A	B	X	Y	④ WIRE SIZE
7114-4020 ② (7B14-4020)	2.60	3.70	(2.44)	(3.30)	3.00	6.20	2.80	8.40	AVS/AVSS/CAVS 0.3~0.5 CHFUS/HFSS 0.35~0.5
7114-4021	3.30	4.60	(3.07)	(4.01)	4.00	7.20	8.00	10.0	AVS 0.5~1.25 CAVS 0.85~1.25 AVSS 0.75~1.25 CHFUS/HFSS 0.75~1.5
7114-4022	4.30	4.60	(4.12)	(4.01)	4.00	7.20	8.00	10.0	AVS/AVSS/HFSS 2



SEC. P-P




SEC. Q-Q



C

2.30

0.64

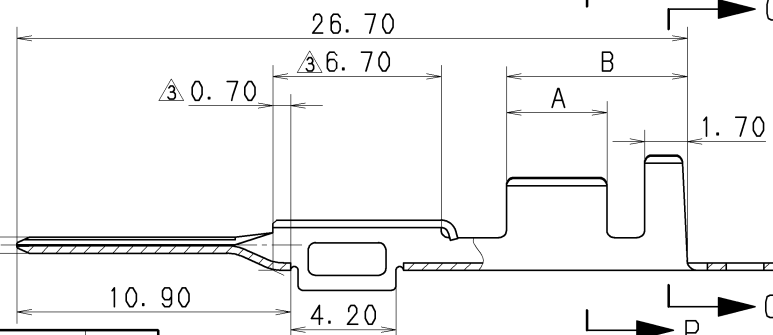

SEC. C-C

③ ∅ 1.50

3.00

X 3.00

1.50

3.80

C

注記

- ③ 1. かん合相手品番: 7116-4020 ETC.
(7B16-4020 ETC.)
- ② 2. () 内品番は、エアバッグ (A/B) 回路及び
特別管理回路に使用する時に適用すること。

NOTES

- ③ 1. MATING PART NO. : 7116-4020 ETC.
(7B16-4020 ETC.)
- ② 2. PART NUMBERS IN PARENTHESIS SHALL
BE USED FOR AIR BAG (A/B) CIRCUITS
AND OTHER CIRCUITS DESIGNATED
FOR SPECIAL MONITORING.

④	09.08.19	CHANGED PART NAME, ETC.	C09-Z597	H. I
③	98.07.18	CHANGED DIMENSION & ADDED NOTE	C97-N451	H. K
②	96.05.27	ADDED A/B PART NO.	C96-L824	H. K
①	93.02.23	RENEW	C93-6226	I. I
	88.08.24	NEW	8MC-1050	N. S
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'
(C)	±0.3	±0.5	±0.8	±1.4	±2	±30'
SPECIFIED						MASS

SEC. C-C										ISSUE MARK	
CUSTOMER						MATL. SPEC. <u>△</u> BRASS (t=0.30)			TREAT. & FIN. <u>△</u> TIN PLATING		
CUSTOMER PART NO.			CUSTOMER DWG NO.			NAME <u>△</u> 2.3Ⅱ TERMINAL MALE					
OFFICE			TRIAL PART NO.								
VENDOR											
VENDOR NO.											
DWG TYPE		DWG SOURCE		DWG DATE		UNIT	SCL	ANGLE	PART NO. CH. CODE		
R		NEW		88.08.24		mm	5/1	3	7114-4020 ETC. <u>△</u> (7B14-4020)		
APPROVED		CHECKED	CHECKED		DESIGN		DRAWN		DWG NO.		
M. YAMANASHI		T. MIWA	H. ISHIDA		M. TSUJI		M. MORAL		7114-4020:R		SET DWG NO.
09.08.19		09.08.19	09.08.19		87.07.27		09.08.19		YAZAKI CORPORATION		

ISSUE MARK