


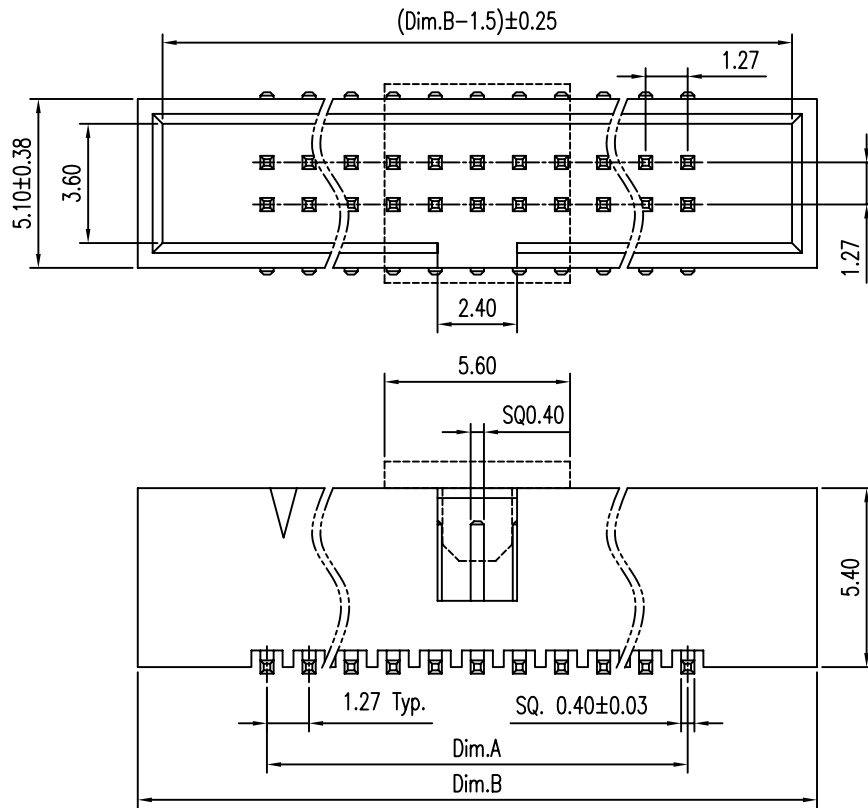



TABLE 1 ,DIM INFORMATION

DASH No.	Dim.	Amount of Pins	Dim.A	Dim.B
-00X 06 XX LF	06	2.54	10.11	
-00X 10 XX LF	10	5.08	12.65	
-00X 12 XX LF	12	6.35	13.92	
-00X 14 XX LF	14	7.62	15.19	
-00X 16 XX LF	16	8.89	16.46	
-00X 20 XX LF	20	11.43	19.00	
-00X 22 XX LF	22	12.70	20.27	
-00X 26 XX LF	26	15.24	22.81	
-00X 30 XX LF	30	17.78	25.35	


DASH No.	Dim.	Amount of Pins	Dim.A	Dim.B
-00X 34 XX LF	34	20.32	27.89	
-00X 40 XX LF	40	24.13	31.70	
-00X 44 XX LF	44	26.67	34.24	
-00X 50 XX LF	50	30.48	38.05	
-00X 60 XX LF	60	36.83	44.40	
-00X 64 XX LF	64	39.37	46.94	
-00X 68 XX LF	68	41.91	49.48	
-00X 80 XX LF	80	49.53	57.10	
-00X A0 XX LF	100	62.23	69.90	

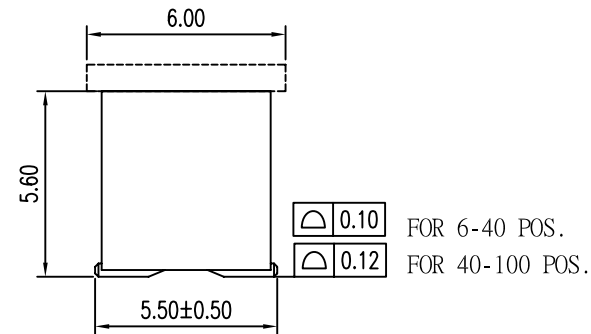

DIM. A	2-60 PINS	± 0.20
	62-100 PINS	± 0.30

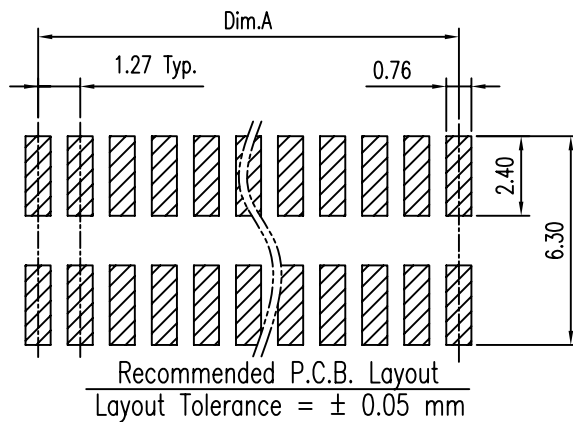

mat'l. code				surface ISO1302	tolerance ISO1101 ISO406	projection MM	product family MINITEK		
ltr	ecn no	dr	date	tolerances unless otherwise specified			title		
H	ELX-N-011951	ZK	06/15/12	angles	0.X±0.38	MM	1.27X1.27MM BTB HEADER UNSHROUDED SMT		
J	ELX-N-14099	TIM	02/25/13	0°±2°	0.XX±0.25				
K	ELX-N-17601	TIM	04/30/14		0.XXX±0.10	scale 5:1			
L	ELX-N-19182	TIM	10/24/14	dr	STERLING LIN	09/15/09	FCI		
E	ELX-N-010364	ZK	01/16/12	engr	STERLING LIN	09/15/09			
F	ELX-N-010621	ZK	03/12/12	chr	GRAY HSIEH	09/15/09	type Product Customer Drawing		
G	ELX-N-011182	ZK	03/31/12	appd	JOSEPH	09/15/09			
sheet index	revision	L	L						
	sheet	1	2						

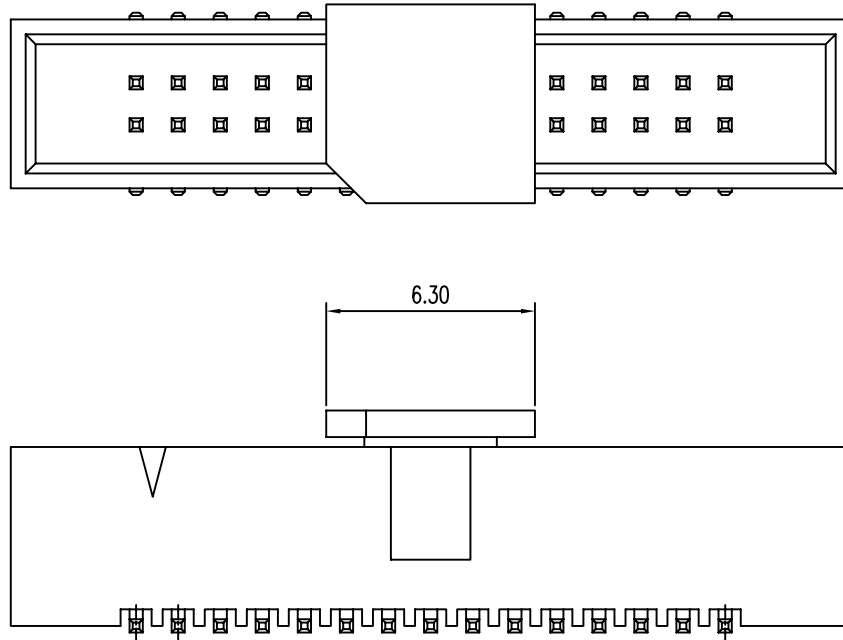

NOTE:

1. MATERIAL,
HOUSING: HIGH TEMP PLASTIC, UL94-V0, BLACK
TERMINAL: COPPER ALLOY, $SQ=0.40\pm0.03$ MM
2. FINISH:
TERMINAL: GOLD AT CONTACT,
G/F OVER 1μ (40u") MIN Ni OVER ALL
3. SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1420
4. THE HSG. WILL WITHSTAND EXPOSURE TO 260C
PEAK TEMP. FOR 10 SEC. IN A CONVECTION, INFRA-RED
OR VAPOR PHASE REFLOW OVEN.
5. PRODUCT NUMBERING:
20021521 - 0 0 X XX X X LF

LEAD FREE

PLATING:

- 1: GOLD FLASH ALL OVER
- 4: 0.25μ (10u") GOLD AT CONTACT
- 8: 0.76μ (30u") GOLD AT CONTACT
- 9: 1μ " GOLD OVER 30u" PdNi AT CONTACT

PACKING

- T: TUBE
- D: TUBE+CAP
- C: REEL+CAP(P:12mm)
- E: REEL+CAP(P:16mm)

PIN COUNT
SEE TABLE 1

CONFIG

- 0: NORMAL (CAP MATERIAL: NYLON)
- 1: CONFIG 1 (CAP MATERIAL: LCP)

CONFIG 1: 20021521-001XXXXLF
WITH EDGE CUT CAP, OTHER DIMENSIONS SEE SHEET 1

mat'l. code				surface ISO1302	tolerance ISO1101 ISO406	projection MM	product family MINITEK			
ltr	ecn no	dr	date	tolerances unless otherwise specified			title			
L				angles	0.X $\pm$ 0.38	MM	1.27X1.27MM BTB HEADER UNSHROUDED SMT.			
				0 $\pm$ 2°	0.XX $\pm$ 0.25					
					0.XXX $\pm$ 0.10	scale 5:1	dwg no			
				dr	STERLING LIN	09/15/09	sheet. 2 of 2			
				engr	STERLING LIN	09/15/09	20021521			
				chr	GRAY HSIEH	09/15/09	size			
				appd	JOSEPH	09/15/09	A4			
sheet index		revision sheet		type			Product Customer Drawing			