




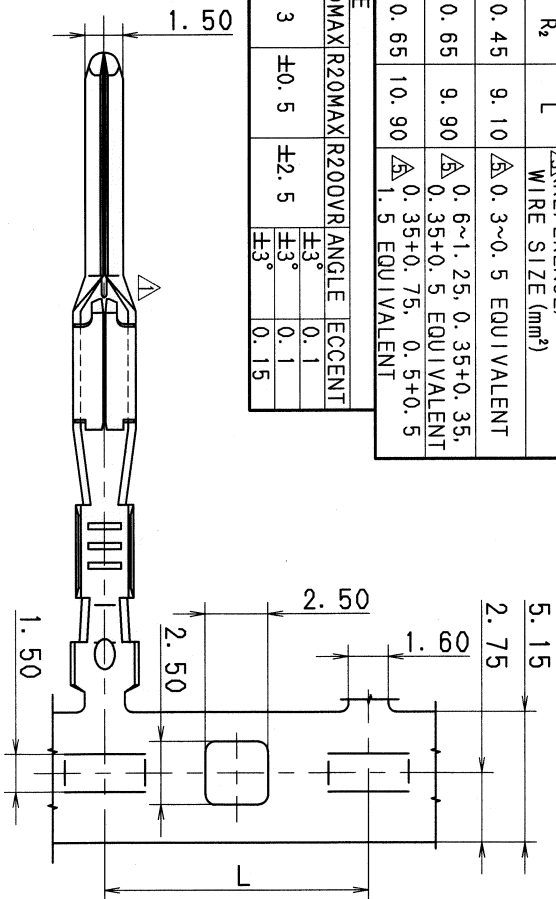



PART NO. AND CH. CODE	W ₁	W ₂	H ₁	H ₂	R ₁	R ₂	L	△(REFERENCE) WIRE SIZE (mm ²)
7114-4100-02	2.50	2.80	(2.40)	(3.50)	0.45	0.45	9.10	△0.3~0.5 EQUIVALENT
7114-4101-02	3.30	3.40	(3.25)	(4.10)	0.65	0.65	9.90	△0.6~1.25, 0.35+0.35, 0.35+0.5 EQUIVALENT
7114-4104-02	△3.40	3.70	(3.25)	(4.60)	0.65	0.65	10.90	△0.35+0.75, 0.5+0.5 △1.5 EQUIVALENT

△GENERAL TOLERANCE						
10MAX	50MAX	100MAX	250MAX	250OVR	R5MAX	R10MAX
±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3
B ±0.2	±0.3	±0.55	±0.95	±1.4	±0.5	±0.5
C ±0.3	±0.5	±0.8	±1.4	±2	±2.5	±3°
					±3°	±3°
					±3°	0.1
					±3°	0.1
					±3°	0.1



- 注記
- 嵌合端子品番: 7116-4100-02 ETC.
 2. 7114-4104-02 においての通電値は、1.0 mm²相当以下とする。
- NOTES
- MATING TERMINAL NO.: 7116-4100-02 ETC.
 - CURRENT FOR 1.0 mm² WIRE OR LESS.

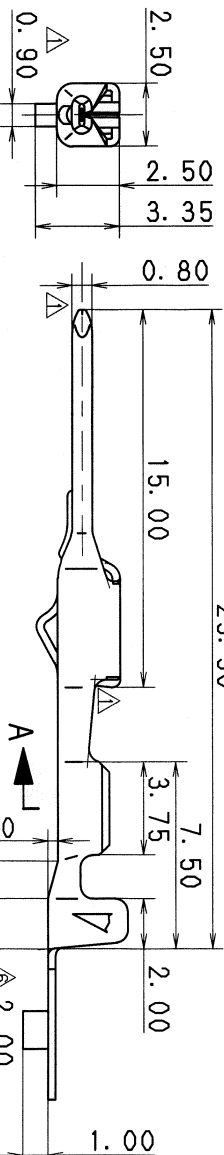

△ 05/10/18	CHANGED GENERAL TOLERANCE TABLE, ETC.	C05-ZD50	Y. W
△ 04/06/25	CHANGED WIRE SIZE	C04-Z636	H. T
△ 03/07/07	CHANGED WIRE SIZE	C03-X434	K. O
△ 00/11/09	CORRECTION OF A CLERICAL ERROR	C00-M343	E. O
△ 99/06/15	CHANGED WIRE SIZE & ADDED NOTE	C99-L932	H. O
△ 96/01/09	CHANGED FORM	C96-L042	A. Y
- 95/09/06	NEW	C95-M058	Y. W
LET DATE	REVISION RECORD	NO.	CHKD
GENERAL TOLERANCE			
10MAX	50MAX	100MAX	250MAX
±0.15	±0.2	±0.3	±0.5
B ±0.2	±0.3	±0.55	±0.95
C ±0.3	±0.5	±0.8	±1.4
			±2
			±3°
			±3°
			±3°
			±3°

CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG. NO.
OFFICE		
VENDOR		
VENDOR NO.		
DWG. TYPE	DWG. SOURCE	DWG. DATE
R	NEW	95/09/06
APPROVED	CHECKED	CHECKED
1/1	1/1	1/1
05.10.25	05.10.24	95/05/29

MATL. COPPER ALLOY	TREAT. TIN PLATING
SPEC. (t=0.3)	
NAME 1.5 SYSTEM CONNECTOR	
MALE TERMINAL	
PART NO. 7114-4100-02 ETC.	
CH. CODE 7114-4100-02:R	
DWG. NO.	SET DWG. NO.
YAZAKI CORPORATION	