

Series 66 Protective Covers

for Series 804 Mighty Mouse Connectors

667-202 Receptacle Cover








MM804 Receptacle Cover



TABLE 1 MATERIAL / FINISH

Aluminum	Stainless Steel
C Black Anodize	Z1 Passivate
M Electroless Nickel	
NF Olive Drab Cadmium	
MT Nickel-PTFE	
ZR Black Zinc-Nickel	
TZ Tin-Zinc	

TABLE 2 ATTACHMENT TYPE

D	 SST Bead Chain .125 (3.2) diameter, size 6, -65 to +200 °C
F	 Wire Rope, Blue Nylon Jacket 6/6 nylon over stainless steel rope, fair flexibility, good abrasion resistance, -55 to +100 °C
G	 Black Nylon Rope Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter, -55 to +100 °C
H	 Wire Rope, Clear FEP Jacket Clear FEP jacket over SST rope, fair flexibility, good abrasion resistance, .100" diameter, -65 to +200 °C
S	 Sash Chain #8 sash chain, stainless steel. Length tolerance is ± one link .280 (71)
SK	 Nylon Rope with Slip Knot Very flexible, good abrasion and fuel resistance, .094 (2.4) diameter. Length includes .5" (13mm) dia. loop, -55 to +100 °C
T	 SST Wire Rope, No Jacket Good flexibility, good abrasion resistance, .047 (1.2) diameter, passivated, -65 to +200 °C
U	 Wire Rope, Black Polyurethane Stainless steel rope with black polyurethane coating, flexible, excellent abrasion resistance and resistance to fuels, .080" (2mm) diameter, -55 to +125 °C

667-202 protective cover fits Glenair Series 804 push/pull receptacle connectors. Aluminum or stainless steel, with stainless steel fittings. Optional stainless steel pull ring simplifies removal.

PART NUMBER

	667-202	ZR	12	U	6	-04	R
Base P/N	667-202						
Material/Finish	See Table 1						
Shell Size	5 6 7 8 9 10 12 14 15						
Attachment Type	-N No Attachment See Table 2 for Attachment Types						
Attachment Length	Omit for Attachment Type N Length in One Inch Increments						
Attachment Ring	Omit for Attachment Types N and SK See Table 3 for Attachment Ring Codes						
Pull Ring	Omit for None -R Pull Ring Supplied						

Shell Size	ø A Max In.	ø A Max mm.	ø B Max In.	ø B Max mm.	H Max In.	H Max mm.
5	.490	12.4	.234	5.9	.740	18.8
6	.490	12.4	.297	7.5	.740	18.8
7	.570	14.5	.367	9.3	.820	20.8
8	.614	15.6	.414	10.5	.870	22.1
9	.680	17.3	.467	11.9	.920	23.4
10	.773	19.6	.548	13.9	1.030	26.2
11	.805	20.4	.600	15.2	1.060	26.9
12	.860	21.8	.658	16.7	1.110	28.2
14	.980	24.9	.781	19.8	1.230	31.2
15	1.045	26.5	.843	21.4	1.300	33.0

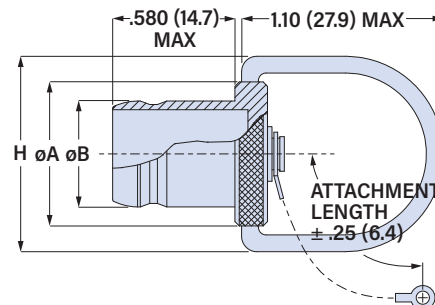






TABLE 3 ATTACHMENT RING

EYELET		SOLID RING		SPLIT RING		CABLE TIE		
								
Code	Eyelet I.D. ±.010 (0.3)	Code	Ring I.D. ±.015 (0.4)	Code	Ring I.D. ±.015 (0.4)	Code	WS	
01	.125 (3.2)	32	.265 (6.7)	19	.885 (22.5)	50	Black 6/6 nylon cable tie 1.77 (45.0) max. wire bundle dia.	
02	.145 (3.7)	29	.315 (8.0)	26	.950 (24.1)	52		432 (11.0)
04	.182 (4.6)	14	.385 (9.8)	28	1.015 (25.8)	54		492 (12.5)
06	.197 (5.0)	15	.445 (11.3)	20	1.070 (27.2)	56		.648 (16.5)
		33	.510 (13.0)	21	1.135 (28.8)	58		.757 (19.2)
		16	.570 (14.5)	22	1.210 (30.7)	60		.898 (22.8)
		17	.635 (16.1)	23	1.275 (32.4)	64		1.023 (26.0)
		18	.695 (17.7)	24	1.380 (35.1)	68		1.137 (28.9)
		27	.766 (19.5)	30	1.380 (35.1)			
		31	.820 (20.8)	25	1.530 (38.9)			