



LTCC SURFACE MOUNT

# Bandpass Filter

BFHKI-7551+

50Ω 6.8 to 8.4 GHz

## THE BIG DEAL


- LTCC Band Pass Filter with Integrated Interposer Board
- Wide Stopband Rejection, Typ. 50 dB up to 19 GHz
- Small Size, 4.95 mm x 3.65 mm
- Shielded Construction
- Protected by US Patents 11,638,370 and 11,744,057

*Generic photo used for illustration purposes only*

## APPLICATIONS

- Quantum Computing
- Backhaul Radio Systems
- Test & Measurement Equipment
- Aerospace and Defense Signal Conditioning

## FUNCTIONAL DIAGRAM

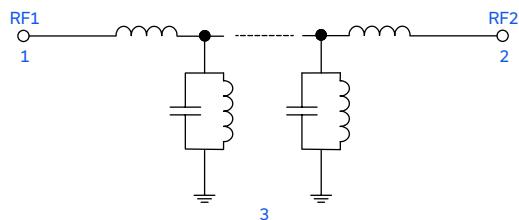

## PRODUCT OVERVIEW

BFHKI-7551+ is a miniature low temperature co-fired ceramic (LTCC) ultra-high stopband rejection band pass filter with a 6.8 to 8.4 GHz passband that supports a variety of applications. This model achieves 50 dB typical stopband rejection up to 19 GHz, when mounted on coplanar waveguide layouts. Housed in a small 4.95 mm by 3.65 mm ceramic form factor, the filter is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The BFHKI family with integrated interposer board enables installation onto PCB layouts with automated manufacturing equipment. This model provides 3.8 dB typical insertion loss over a wide band due to its rugged monolithic construction. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

## KEY FEATURES

Features	Advantages
Surface Mountable due to Integrated Interposer Board	Enables installation with automated manufacturing equipment, making this suitable for high-volume processes.
Wide Rejection	Provides high stopband rejection of 50 dB typical up to 19 GHz.
Small Size (4.95 x 3.65 mm)	Saves space in dense circuit board layouts and minimizes the effects of parasitics.
LTCC Construction	Provides repeatable performance in a rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes.
Cost Effective	LTCC is a scalable technology that is cost effective due to its ease of production in high-volume.

REV. OR  
ECO-023769  
BFHKI-7551+  
MCL NY  
241127

**Mini-Circuits**[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 5



LTCC SURFACE MOUNT

# Bandpass Filter

BFHKI-7551+

50Ω 6.8 to 8.4 GHz

## ELECTRICAL SPECIFICATIONS<sup>1,2,3</sup> AT +25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency <sup>4</sup>	—	—	7.5	—	GHz
	Insertion Loss	F1-F2	6.8 – 8.4	—	3.8	4.6
	Return Loss	F1-F2	6.8 – 8.4	13	15	—
Stopband, Lower	Rejection	DC-F3	0.1 – 4	65	75	—
Stopband, Upper	Rejection	F4-F5	10.6 – 19	40	50	—

1. Tested on Evaluation Board P/N TB-BFHKI-7551C+. Measured with the connector and feedline effects de-embedded using the 2XThru IEEE P370 method.

2. Bi-directional, RF1 and RF2 ports can be interchanged.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

4. Typical variation ±3%.


## ABSOLUTE MAXIMUM RATINGS<sup>5</sup>

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Input Power <sup>6</sup>	1 W

5. Permanent damage may occur if any of these limits are exceeded.

6. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.5 W at +125°C.

## TYPICAL FREQUENCY RESPONSE AT +25°C

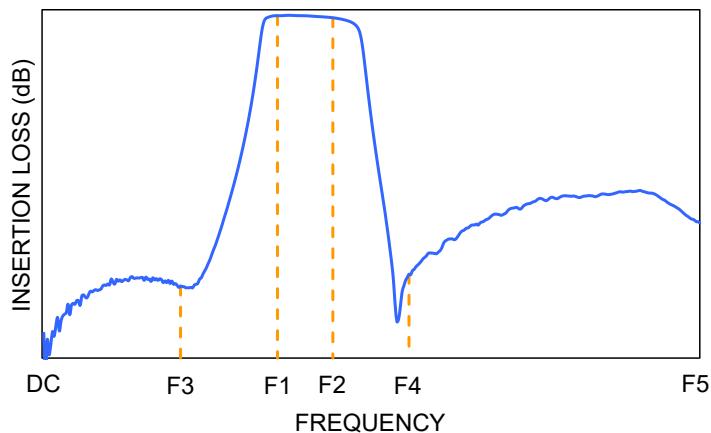







LTCC SURFACE MOUNT

# Bandpass Filter

BFHKI-7551+

50Ω 6.8 to 8.4 GHz

## TYPICAL PERFORMANCE GRAPHS

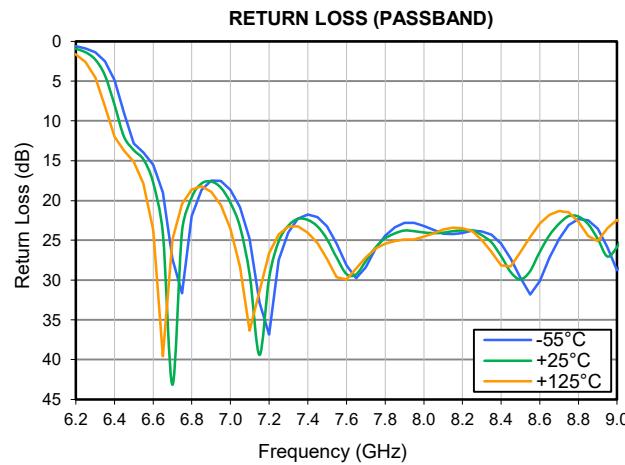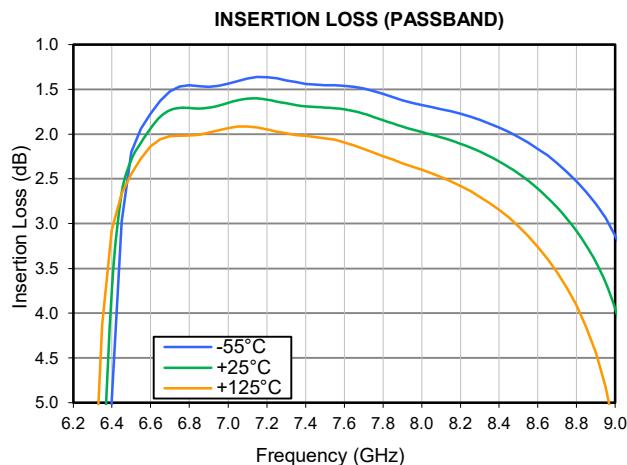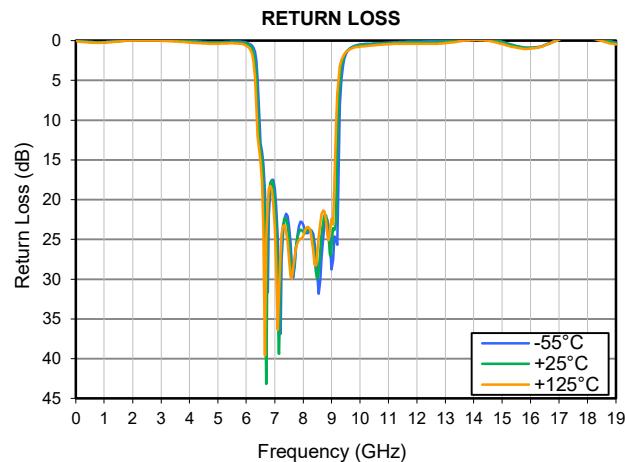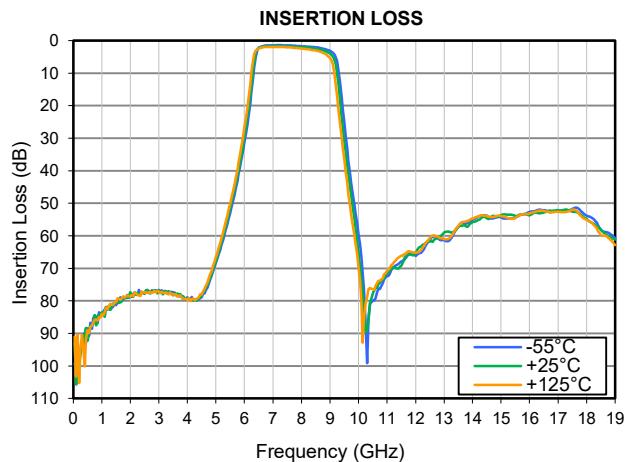



LTCC SURFACE MOUNT

# Bandpass Filter

BFHKI-7551+

50Ω 6.8 to 8.4 GHz

## FUNCTIONAL DIAGRAM


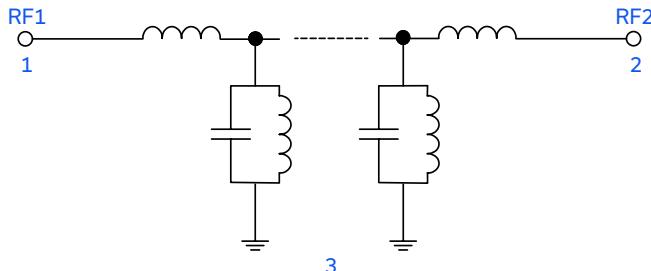


Figure 1. BFHKI-7551+ Functional Diagram

## PAD DESCRIPTION

Function	Pad Number	Description
RF1 <sup>2</sup>	1	Connects to RF Input Port
RF2 <sup>2</sup>	2	Connects to RF Output Port
GROUND	3	Connects to Ground on PCB, (See drawing PL-767)

## CASE STYLE DRAWING (NM3237)

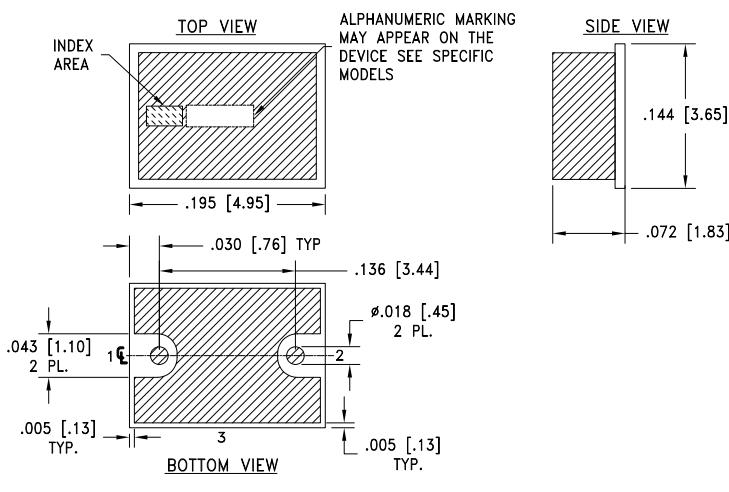


METALLIZATION

Weight: .135 grams.

Dimensions are in inches [mm]. Tolerances: 2 Pl.±.01; 3 Pl. ±.005

## SUGGESTED PCB LAYOUT (PL-767)

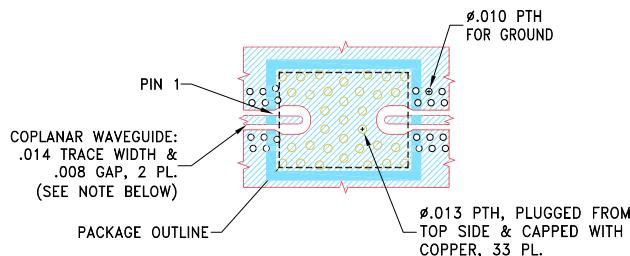**NOTES:**

1. PCB IS MULTILAYER PCB. SEE STACK-UP DIAGRAM.
2. TRACE WIDTH & GAP ARE SHOWN FOR .0079 MEGTRON-7 R5785(N/GN). COPPER: 1/2 OZ. EACH LAYER. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
3. LAYERS L2, L3 & L4 OF PCB ARE CONTINUOUS GROUND PLANES.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

**STACK-UP DIAGRAM**

COPPER LAYER 1(L1), .5 OZ.
CORE 1, .0079 MEGTRON-7 R5785(N/GN)
COPPER LAYER 2 (L2), .5 OZ.
PTH
HOLE
-PREPREG, .0035 (89 um) MEGTRON-7 R5680(N/GN), CLOTH STYLE:1078
-PREPREG, .0035 (89 um) MEGTRON-7 R5680(N/GN), CLOTH STYLE:1078
COPPER LAYER 3 (L3), .5 OZ.
CORE 2, .0079 MEGTRON-7 R5785(N/GN)
COPPER LAYER 4 (L4), .5 OZ.

1. TOTAL FINISHED THICKNESS 0.026 ± 10%.
2. PTH PRESENT FROM COPPER LAYER 1 TO COPPER LAYER 4.

Figure 2. Suggested PCB Layout for BFHKI-7551+

**PRODUCT MARKING\*: F562**

\*Marking may contain other features or characters for internal lot control.

**Mini-Circuits®**



LTCC SURFACE MOUNT

# Bandpass Filter

BFHKI-7551+

50Ω 6.8 to 8.4 GHz

**ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD. [CLICK HERE](#)**

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	NM3237 Finish: Gold over Nickel Plating
RoHS Status	Compliant
Tape and Reel	TR-F77
Suggested Layout for PCB Design	PL-767
Evaluation Board	TB-BFHKI-7551C+ Gerber File
Environmental Rating	ENV06T12

**NOTES**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

