
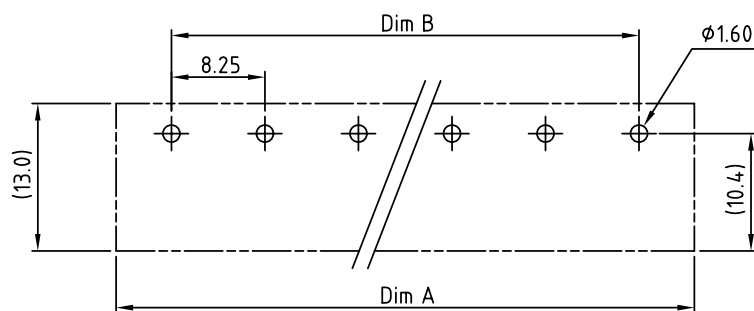
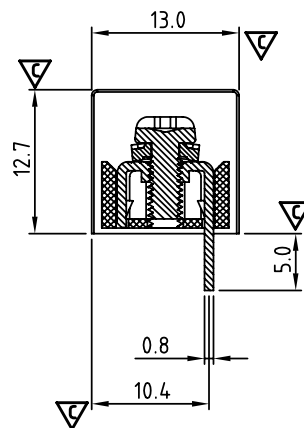
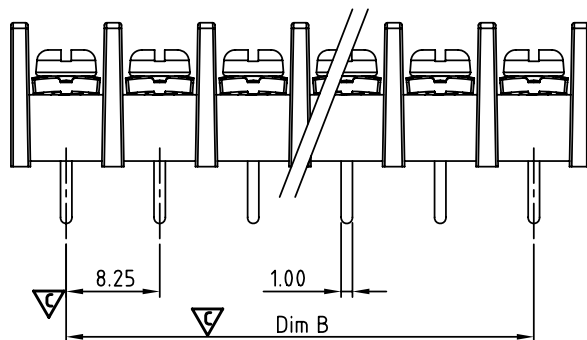


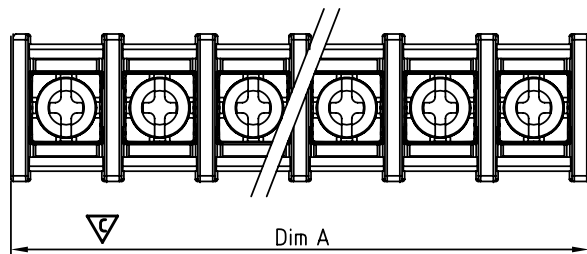

RECOMMENDED PCB LAYOUT ▲

POLE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Dim A		18.22	26.47	34.72	42.97	51.22	59.47	67.72	75.97	84.22	92.47	100.72	108.97	117.22	125.47	133.72
Dim B		8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50	123.75
Tol	±0.30								±0.40							
POLE	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
Dim A	141.97	150.22	158.47	166.72	174.97	183.22	191.47	199.72	207.97	216.22	224.47	232.72	240.97	249.22	257.47	265.72
Dim B	132.00	140.25	148.50	156.75	165.00	173.25	181.50	189.75	198.00	206.25	214.50	222.75	231.00	239.25	247.50	255.75
Tol	±0.50								±0.60							

SIGN	DATE	DESCRIPTION	APPROVER
▲	2/06'06	Part No. changed	Tony
▲	07/12'10	Recommended P.C.B Layout is changed	Aaron
▲	11/08'12	Change the screw plating specification	Jacky
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

MATERIALS ELECTRICAL

RATED VOLTAGE & CURRENT:	300 V, 20 A
WITHSTAND VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
OPERATING TEMPERATURE RANG:	-40 °C ~ +115 °C
SCREW TORQUE VALUE:	8.8 Lb-In.
WIRE RANGE:	22 - 12 AWG
1) MOLDED PARTS:	PA 66, UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, M3

APPROVAL:

▲ PART NO.:

Critical dimension: ▲

YK 421 xx 0 x x 00G

NO. OF POLES

02: 2 POLES
03: 3 POLES
04: 4 POLES
...

30: 30 POLES

RoHS compliant
(lead<4%) in copper Alloy

MARK

0: "@" MARK
1: "ANY" MARK

TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F
▲ 1: TERMINAL: G/F, SCREW: Zinc
2: TERMINAL: Sn, SCREW: G/F
▲ 3: TERMINAL: Sn, SCREW: Zinc

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		YK-421 W/O Flange Series			
PART NO.	YK421xx0xx00G	DWG NO.	8YK0001-421		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Jacky 2012.11.08	Jacky 2012.11.08		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
		SHEET: 01/01		UNIT: mm SCALE: NONE REV.: E	