



Features

- Low cost
- Small size
- 5 sections
- Temperature stable
- Excellent power handling
- LTCC construction with great moisture resistance, corrosion resistance, and high reliability

Applications

- Sub-harmonic rejection
- Transmitters / receivers
- base station of mobile communication and lab use

Electrical Specifications¹ (T_{AMB}= 25° C)




STOP BAND (MHz)		FCO ₀ (MHz) Nom.	PASS BAND (MHz)		VSWR (:1)		POWER INPUT (W)	NO. OF SECTIONS
(Loss>30dB) Typ.	(Loss>20dB) Min.	(Loss 3dB) Typ.	(Loss<2.5dB) Max.	(Loss<3.5dB) Max.	Stopband Typ.	Frequency (MHz) 1.5:1	Max	
5100	6150	7150	8500-10500	7900-11000	20:1	7900-11000	7	5

¹. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.

Typical Performance Data at 25° C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	61.91	1737.18
1000	38.60	1500.37
1960	35.58	157.93
3250	40.06	69.49
4170	39.69	32.79
5020	26.83	27.16
5680	22.27	25.72
6470	20.04	21.40
7550	9.03	2.47
8500	1.93	2.02
9480	1.81	2.34
10610	1.41	2.01
11530	0.92	1.52
1244	1.35	1.93
14000	1.19	1.61

Suggested PCB Layout

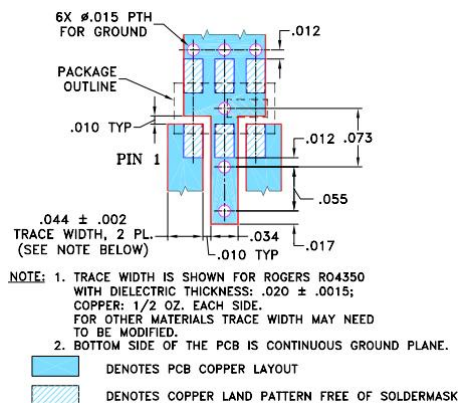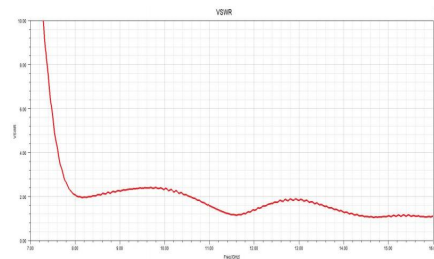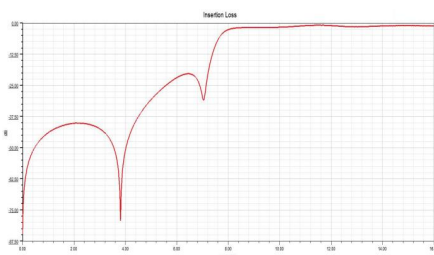


JY-HFCN-7150+



50 Ω 7900 to 11000 MHz

electrical schematic



Pin Connections


RF IN	1
RF OUT	3
GROUND	2,4,5,6

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	7W at 25°C

*Passband rating, derate linearly to 3W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

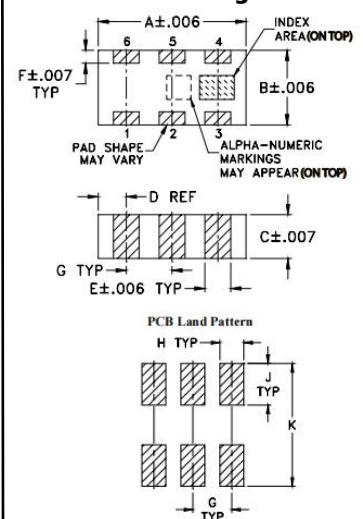

Suggested Layout
Tolerance to be within ±0.02

Outline Dimensions: Unit (mm)

A	3.20	B	1.60	C	0.89
D	0.61	E	0.56	F	0.28
G	0.99	H	0.61	J	1.07
K	3.12	wt	0.020g		