

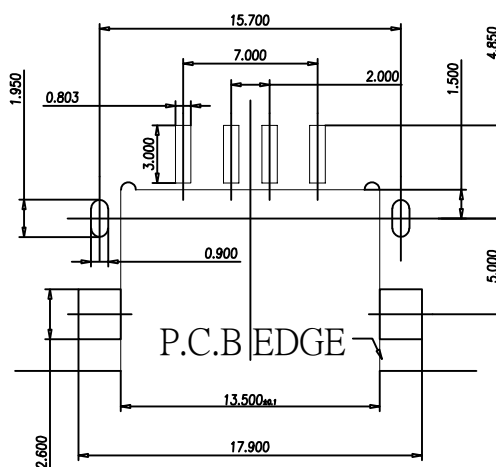
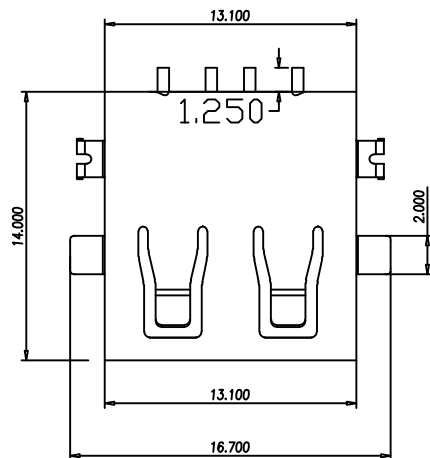

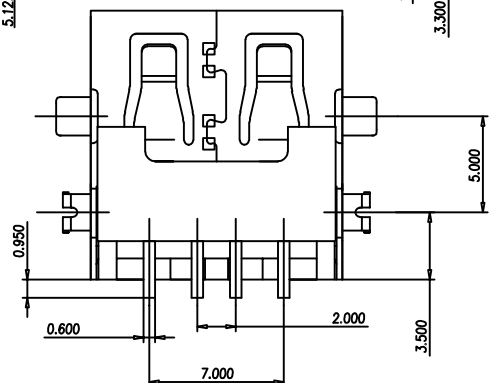


RoHS

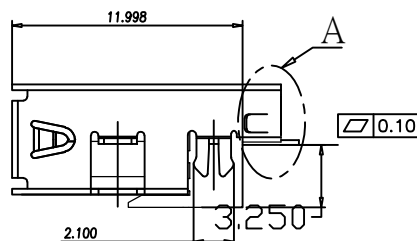

RECOMMENDED P.C.B. PATTERN LAYOUT

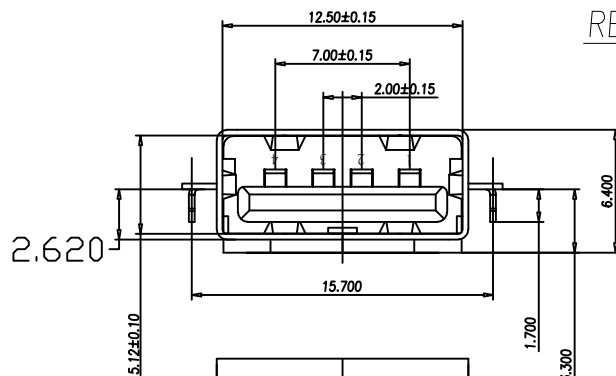

DET "A"
2:1

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Thermoplastics,
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC


电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U"(MIN)锡,镀金区域镀100-200U"镀金1U"

- 外壳: Shell:
铜壳四周镀80U"(MIN)锡

Nickel Plating

Unless otherwise specified tolerances are				深圳市雨鸿电子科技有限公司				Shenzhen Yuhong Electronic Technology Co., Ltd			
X.X	±0.25			DRAW NO.		DATE		DRAW NAME:			
X.XX	±0.20	DWN		尹 宣		2019.11.27		AF 沉板破板180度直边 新弹			
X.XXX	±0.10	CHK						P/N : Y-H4P1400L-U2T			
X°	±3°	APVD									
X.X°	±2°										
X.XX°	±1°										
 Third Angle Project		FINISH		****		UNIT	SCALE	WEIGHT	REV	SHEET	
		MATERIAL				mm	1:1		A	1 OF 1	