
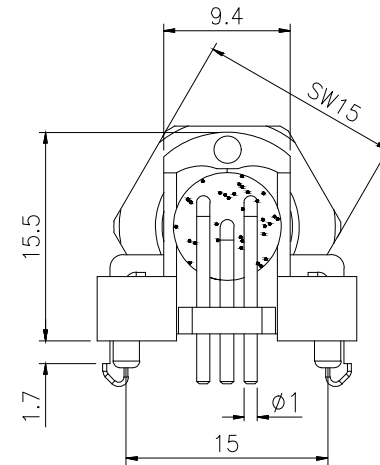
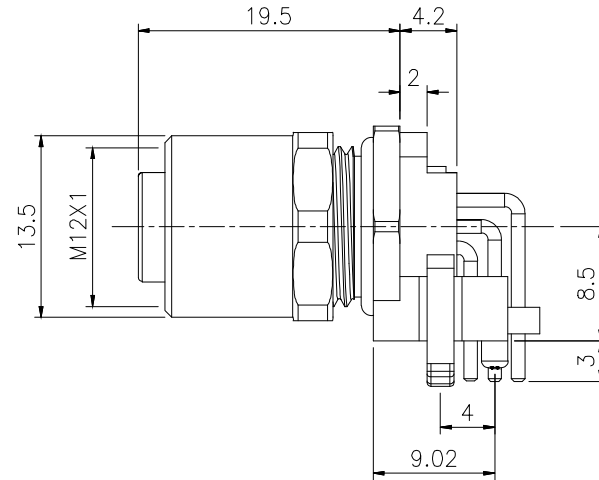


1 2 3 4 5 6 7 8

Mark	Qty	Engineering Change Area



A



A

B

B

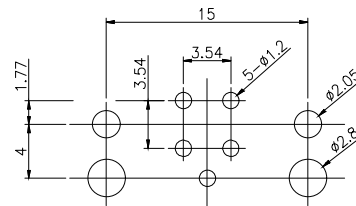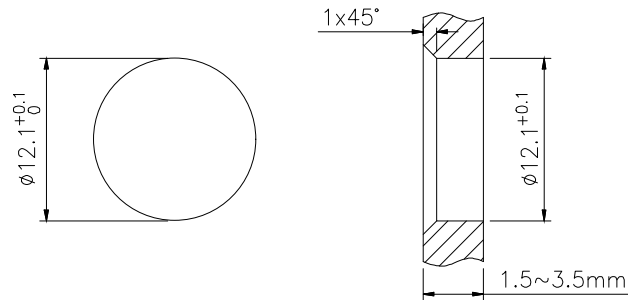

RECOMMENDED PCB LAYOUT

NOTE:

1. ELECTRICAL:

- 1.1. RATED VOLTAGE: 250V
- 1.2. RATED CURRENT: 4A
- 1.3. CONTACT RESISTANCE: $\leq 15\text{m}\Omega$
- 1.4. INSULATION RESISTANCE: $\geq 100\text{M}\Omega$
- 1.5. Rated impulse voltage: 2500V

2. ENVIRONMENTAL:

- 2.1. OPERATING TEMPERATURE: -25°C TO $+85^{\circ}\text{C}$
- 2.2. PROTECTION GRADE: IP67, WHEN TIGHT LOCKED
- 2.3. POLLUTION DEGREE: 3
3. CONTACT MATERIAL: BRASS NI PLATED UNDER GOLD FLASH PLATED
4. CONFORM TO IEC 61076-2-101

C


PANEL CUT-OUT

* UNLESS OTHERWISE SPECIFIED
TOLERANCES ON DECIMAL IS:

X.	± 0.38	X°	$\pm 2^{\circ}$
X.X	± 0.25		
X.XX	± 0.15		
X.XXX	± 0.10		

D

D

 All dimensions are in mm			Material:					
			Finishing:					
	Signature	Date	Phase Marking		Weight	Scale	拓宜(上海)工控电器设备有限公司 Topone(Shanghai) Industrial Control Electrical Equipment Co., LTD.	
Created by			P/N		61053407		Part Name: C12B-FAD-RM1-4 SH	
Checked by			MD/CD				Rev. 01	Page: 1 OF 1
Approved by								
State	First Release							

1 2 3 4 5 6 7 8