

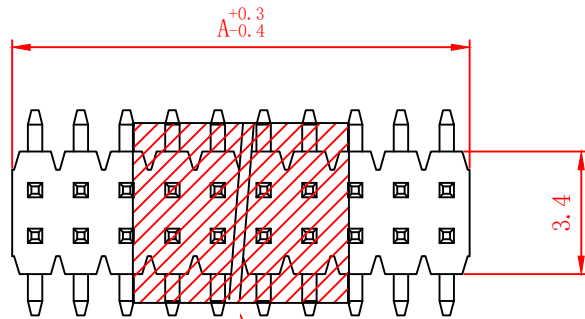
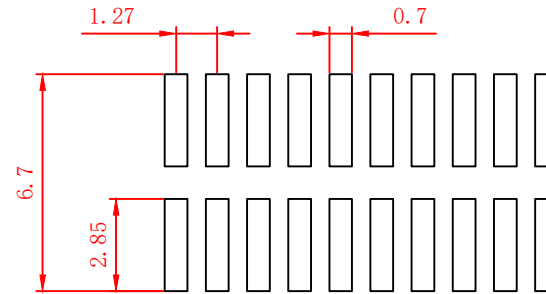


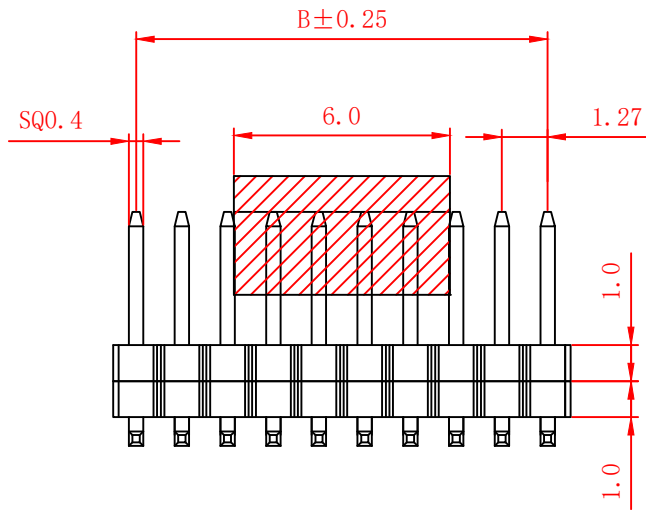

2*2PIN盖帽尺寸L=2.54*4.0*3.7mm
2*3/4PIN盖帽尺寸L=3.2*4.0*3.7mm
2*5PIN及以上盖帽尺寸L=6.0*5.0*3.3mm

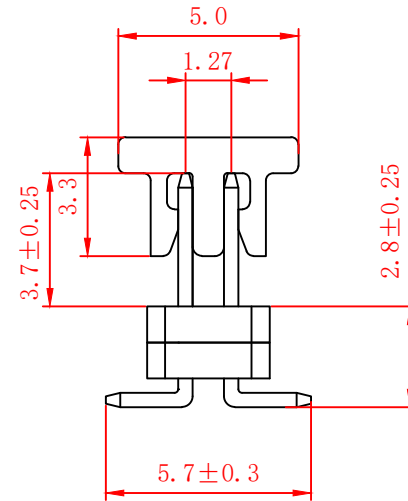

PCB LAYOUT

SPECIFICATIONS:

Current Rating: 1Amp
Insulator Resistance: 1000Megohms min
Contact Resistance: $\leq 20m\Omega$
Dielectric withstanding: AC 500V
Operating Temperature: $-40^{\circ}\sim+85^{\circ}$
Max Processing Temp: 260°C for 5~10 seconds
Contact Material: Brass
Insulator Material: PA6T UL 94V-0
Plating: G/F

Contacts Per Row	Dimensions		Contacts Per Row	Dimensions	
	A	B		A	B
			2*26pin	33.02	31.75
2*2pin	2.54	1.27	2*27pin	34.29	33.02
2*3pin	3.81	2.54	2*28pin	35.56	34.29
2*4pin	5.08	3.81	2*29pin	36.83	35.56
2*5pin	6.35	5.08	2*30pin	38.1	36.83
2*6pin	7.62	6.35	2*31pin	39.37	38.1
2*7pin	8.89	7.62	2*32pin	40.64	39.37
2*8pin	10.16	8.89	2*33pin	41.91	40.64
2*9pin	11.43	10.16	2*34pin	43.18	41.91
2*10pin	12.7	11.43	2*35pin	44.45	43.18
2*11pin	13.97	12.7	2*36pin	45.72	44.45
2*12pin	15.24	13.97	2*37pin	46.99	45.72
2*13pin	16.51	15.24	2*38pin	48.26	46.99
2*14pin	17.78	16.51	2*39pin	49.53	48.26
2*15pin	19.05	17.78	2*40pin	50.8	49.53
2*16pin	20.32	19.05	2*41pin	52.07	50.8
2*17pin	21.59	20.32	2*42pin	53.34	52.07
2*18pin	22.86	21.59	2*43pin	54.61	53.34
2*19pin	24.13	22.86	2*44pin	55.88	54.61
2*20pin	25.4	24.13	2*45pin	57.15	55.88
2*21pin	26.67	25.4	2*46pin	58.42	57.15
2*22pin	27.94	26.67	2*47pin	59.69	58.42
2*23pin	29.21	27.94	2*48pin	60.96	59.69
2*24pin	30.48	29.21	2*49pin	62.23	60.96
2*25pin	31.75	30.48	2*50pin	63.5	62.23

L=0.4*8.3mm

						DSND		DATE		SCALE: N/A	MODEL TYPE:
Δx					ANGULAR	DWN		DATE		VIEW: 	PART NO.:
Δx					$L \leq 4$	CHKD		DATE		UNIT: mm/in	X1322WVS-2XXXJ-C37D57-E20-21039
Δx					$4 < L \leq 16$	APPD		DATE		SIZE: A4	DWG NO.:
MARK	DESCRIPTION	DATE	REVISED	APPROVED	$16 < L \leq 63$						
REVISIONS					$L > 63$						
					UNSPECIFIED TOLERANCES						
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn						KKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT
											1.0g
											SHEET
											1/1
											REVISION
											A0