




SPECIFICATIONS:

Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC 100V(RMS)
 Insulation resistance:100Megohms Minimum.
 Contact Resistance:
 30mV Max for pin1&pin4
 50mΩ Max for other contacts
 Mechanical Characteristics:
 Mating Force:35 Newtons.Maximum
 Unmating Force:10 Newtons.Minimum.
 8N Min After Durability


MATERIAL:

Housing: PBT+30%GF 94V-0 COLOR:SEE TABLE
 Contact: copper alloy(T=0.25mm)
 copper alloy(T=0.30mm)

PLATING:

Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated
 operating Temperature:-55°to+85°

U235-09XN-2XC2-002

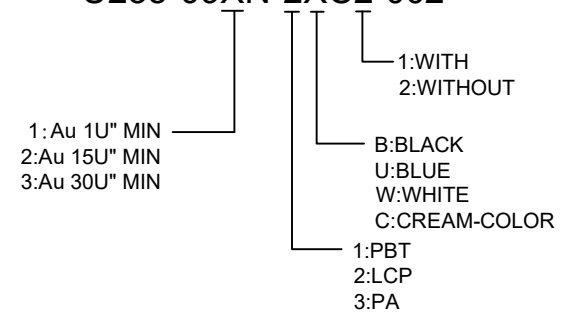

							DSND		DATE		SCALE: N/A	MODEL TYPE: USB 3.0			
Δx						ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
Δx						4<L≤16	±0.3	CHKD		DATE		UNIT: mm/in	DWG NO.:		
Δx						16<L≤63	±0.4	APPD		DATE		SIZE: A4	U235-09XN-2XC2-002		
MARK	DESCRIPTION			DATE	REVISED	APPROVED	L>63	±0.5							
REVISIONS							UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													1.0g	1/1	A0