




DOF-0-212D(98.02)





SJ015275
(DRAWING NO.)

QE-POL-POST (POST)



M4 x 0.7

QE-POL-KEY (KEY)

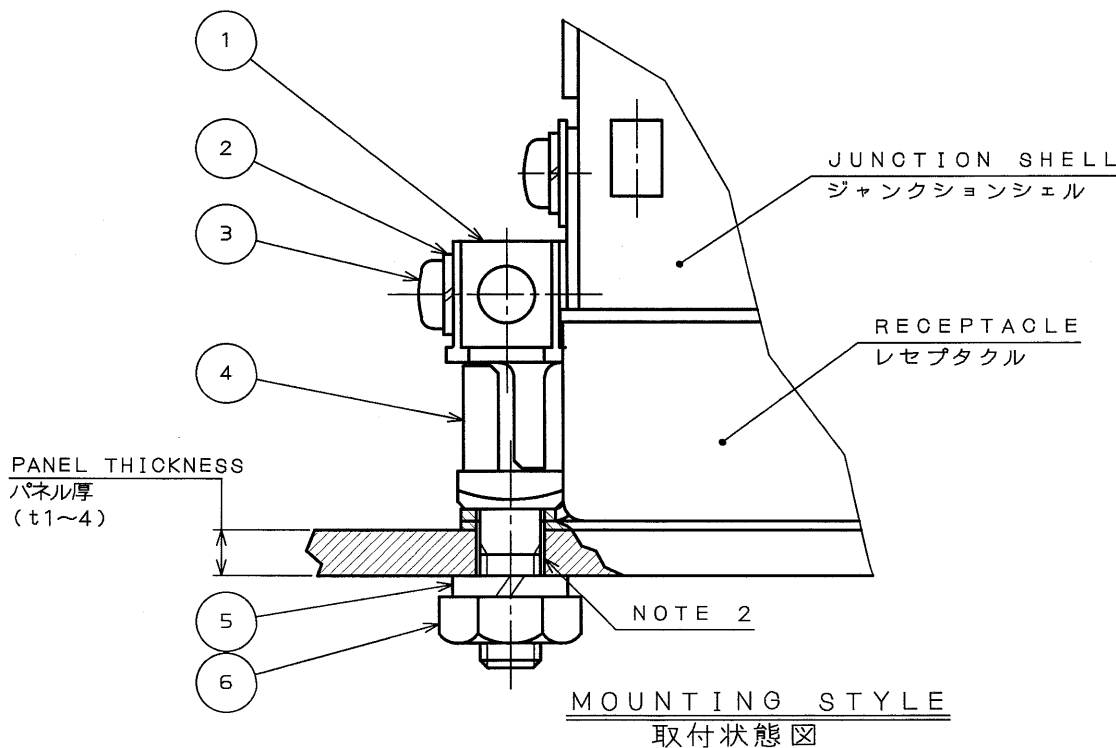

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
4	20.Jun.2001	48242	CHANGED NOTES & REDRAWN	—	T.SUZUKI	S.NANAO	M.MAJIME
5	14.Mar.2003	51701	REDRAWN	H.SAKURADA	T.SUZUKI	E.Matsumoto	S.Nanao

NOTE 1. BOTH QE-POL-POST AND QE-POL-KEY ARE PROVIDED WITH SCREW, NUT AND SPRING WASHER.

2. THE PANEL MOUNTING HOLE IS THROUGH-HOLE.

3. BY THE COMBINATION OF POST AND KEY, THERE ARE 16 KINDS OF POLARIZATIONS AVAILABLE SHOWN BELOW:

注1.QE-POL-POST,-KEYは、各々ねじ、ナット、ばね座金付きです。

2.パネルの取付穴は、通し穴であること。

△3.「ポスト」と「キー」の組合わせにより下記のように16種類の位置決めが出来ます。

△	RECEPTACLE レセプタクル	PLUG プラグ	△	RECEPTACLE レセプタクル	PLUG プラグ
KINDS 種類	QE-POL-POST (POST)	QE-POL-KYE (KEY)	KINDS 種類	QE-POL-POST (POST)	QE-POL-KYE (KEY)
1			9		
2			10		
3			11		
4			12		
5			13		
6			14		
7			15		
8			16		

6	NUT	1	STEEL	NICKEL PLATING	
5	SPRING WASHER	1	STEEL	NICKEL PLATING	
4	POST	1	STEEL	NICKEL PLATING	
3	SCREW	1	STEEL	NICKEL PLATING	
2	SPRING WASHER	1	STEEL	NICKEL PLATING	
1	KEY	1	ZINC	NICKEL PLATING	
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE)		入数 (QUANTITY)	
T74-1 JABL-3162 △ JABL-3162-1		14.Apr.1977		2: 1	
公差 (GENERAL TOLERANCE)		製図 DR.	T.YAGINUMA	名称 (TITLE)	
寸法 (DIMENSION)		担当 CHK.	H.KAWAMURA	QE-POL-※	
角度 (ANGLES)		査閲 APPD.	YAMAZAKI	重量 (WEIGHT)	
承認 APPD.		HARA	図面番号 (DRAWING NO.)		
. ±0.5		. ×° ±		SJ015275	
. × ±0.5		. ×° × ' ±			
. × × ±					
. × × × ±					