

2


3

TABLE 1 YAZAKI SUB ASSEMBLY PART NO.

7219-3320 ETC.	NO.	YAZAKI PART NO.	MATERIAL	COLOR	QTY.
	①	SEE TABLE 2	PBT	SEE TABLE 2	1
	②	SEE TABLE 2	PBT	SEE TABLE 2	1
	③	7137-1230	SILICONE RUBBER	RED IRON	1

TABLE 2 YAZAKI SUB ASSEMBLY PART NO.

YAZAKI SUB ASSEMBLY PART NO.	YAZAKI HOUSING PART NO.	YAZAKI LOCK PART NO.	COLOR
7219-3320	7119-3320	7157-8673	NATURAL
7219-3320-10	7119-3320-10	7157-8673-10	DARK GRAY
7219-3320-20	7119-3320-20	7157-8673-20	VIOLET
7219-3320-30	7119-3320-30	7157-8673-30	BLACK
7219-3320-40	7119-3320-40	7157-8673-40	LIGHT GRAY
7219-3320-50	7119-3320-50	7157-8673-50	ORANGE
7219-3320-60	7119-3320-60	7157-8673-60	GREEN
7219-3320-70	7119-3320-70	7157-8673-70	YELLOW
7219-3320-80	7119-3320-80	7157-8673-80	BROWN
7219-3320-90	7119-3320-90	7157-8673-90	BLUE

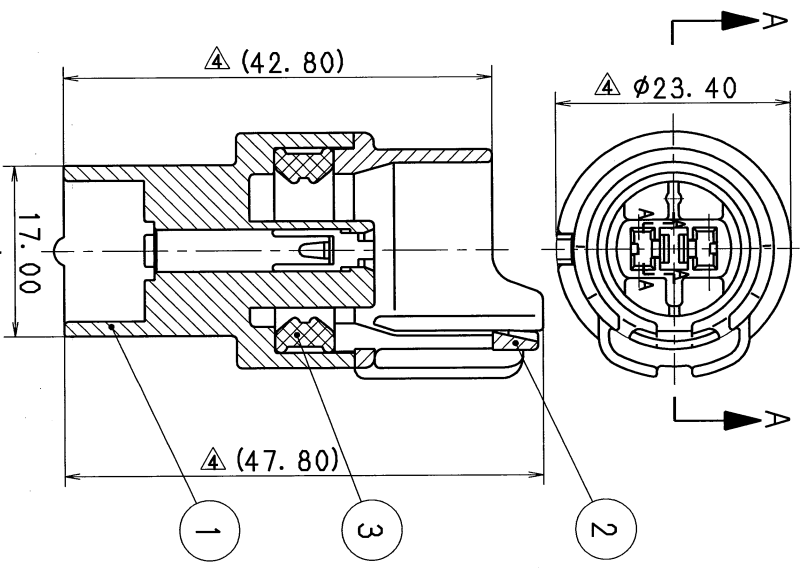

SEC. A-A

VIEW C

1. 取扱説明書 No. : YPES-15-041
1. 取扱説明書 No. : YPES-15-041

12. 05. 10	ADDED GENERAL TOLERANCE ETC.	C12-Z447	J. B
97. 06. 17	CAD DRAWN & ADDED PART NO.	C97-M139	M. T
88. 04. 21	色品追加	8MC-0450	山本
86. 04. 28	形状変更及び公差変更	C86-5484	近藤
82. 11. 01	NEW	C82-3023	山田
LET	DATE	REVISION RECORD	NO. CHKD
GENERAL TOLERANCE			
10MAX	50MAX	100MAX	250MAX
A ±0.15 ±0.2	±0.3 ±0.5	±0.75 ±30'	0.1
B ±0.2 ±0.3	±0.55 ±1.4	±30'	0.1
C ±0.3 ±0.5	±0.8 ±1.4	±30'	0.15
SPECIFIED			
MASS			

CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.	
OFFICE		TRIAL PART NO.			
VENDOR					
VENDOR NO.					
DWG TYPE		DWG SOURCE		DWG DATE UNIT	
R		NEW		80. 06. 10	
APPROVED		CHECKED		DESIGN	
M. FUKUDA		Y. SASAKI		T. KATO	
12. 05. 10		12. 05. 10		12. 05. 10	

MATL. SPEC.	SEE TABLE 1	TREAT. & FIN.
NAME  B. S. HOUSING 2P		
SUB ASSEMBLY FEMALE		
PART NO.	7219-3320 ETC.	
CH. CODE		
DWG NO.	7219-3320:R	SET DWG NO.
YAZAKI CORPORATION		

2

3