

A range of high quality UK manufactured phono plugs made from machined brass with various plating options.

-Centre contact available in solid pin.

-Ground contact with unique 'T' shape slot for maximum contact area.

-Internal cable clamp for secure cable connection.

-Spring strain relief.

-Colour coded ID rings for easy cable identification.

-Attractive body styling.

-Maximum cable size 5.5mm

Rating – 5A at 200 Vdc/150 Vac max.

Insulation resistance – 100M Ω at 500 Vdc

Material

Centre contact :Brass, flash gold plated


Ground contact :Brass, flash gold plated

Insulation :Noryl SE1

Cable clamp :Brass, flash gold plated

Spring :Spring steel, black chrome plated

Cap :Brass, black chrome plated

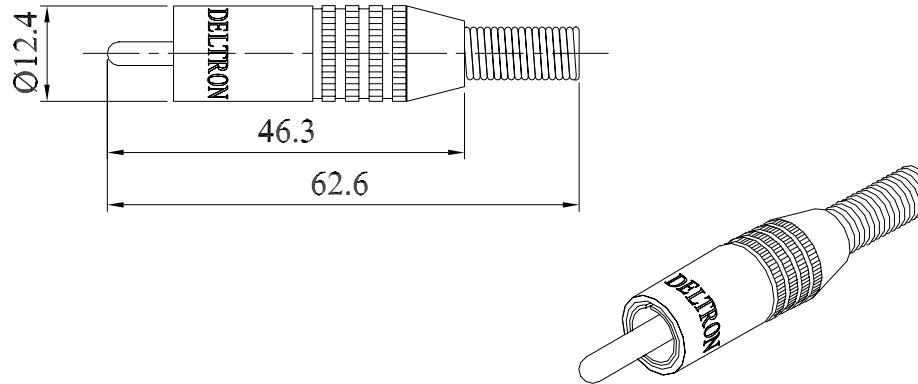


Deltron Part No.	Description
335-0000	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING
335-0100	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (BLACK ID RING)
335-0200	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (BLUE ID RING)
335-0500	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (RED ID RING)
335-0600	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (WHITE ID RING)
335-0700	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (YELLOW ID RING)

CONVERTED FROM PS0359 ISS2 (04.01.94) IN JAN 2003

DrgNo 335 SERIES

TITLE PROFESSIONAL PHONO LINE PLUG

ALL DIMENSIONS IN MM
ANGLES IN DECIMAL DEGREES



DELTRON Components

ISSUE

2

GENERAL SPECIFICATION
FOR 335 SERIES

CUSTOMER

FILTER REF

Aprvd Date 03/02/03 Aprvd By MC Drwn by BS Scale: NTS Sheet 1 / 1