


CIRCUIT: SPDT

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
DN	NONE	DN	
2-3	OPEN	2-1	

POS. 1 POS. 2

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 5A @120VAC OR 28VDC;
2A @250VAC
 5. FIXED TERM. & MOVING CONTACT;
Copper Alloy W/Silver plate.
 6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
 7. INSULATION RESISTANCE: 1,000M ohm min.
 8. DIELECTRIC STRENGTH: 1000V RMS @sea level
 9. OPERATING TEMP.: -30°C to 85°C
 10. 2002/95/EC (ROHS) COMPLIANT

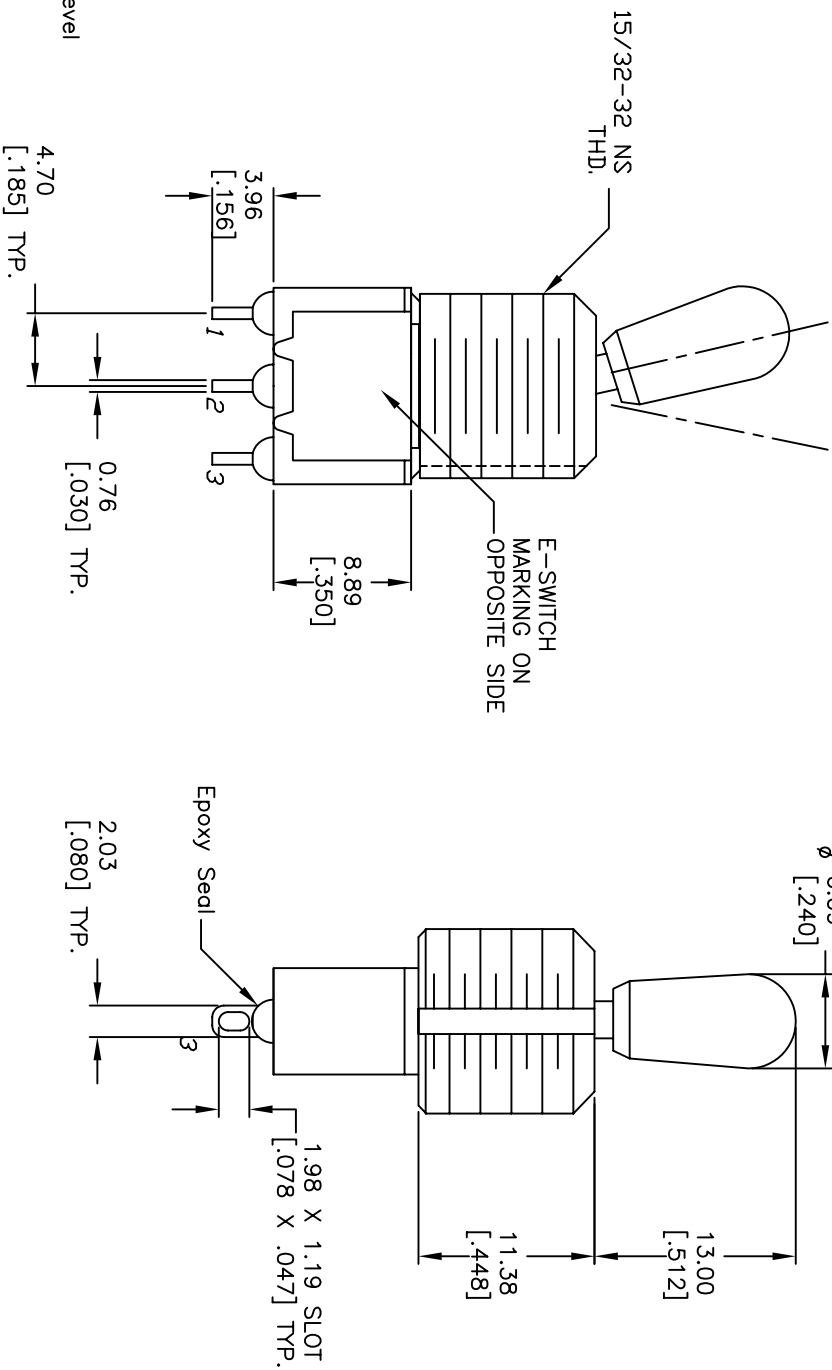

E-SWITCH®					
TITLE					
100 SP-1 T7 B13 M1 Q E					
SCALE		DATE	DR	DWG	REV
2:1		12/11/01	CJB	T111082	C
C	15519	ADD ROHS NOTE	11/10/05	PH	
B	14164	UPDATE ACTUATOR	7/13/04	AR	
A	11854	RELEASED FOR PRODUCTION	12/11/01	CJB	
REV.	ECN No.	DESCRIPTION	DATE	CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[100SP1T7B13M1QE](#)