



MURD1040DDFCT


Superfast Recovery Rectifiers

FEATURES

- Low profile package
- Fast reverse recovery time
- Easy to pick and place
- Low forward Voltage drop
- High temperature soldering : 260°C/10 seconds at terminals
- Lead free in comply with EU ROHS 2011/65/EU directives



ITO-220AB

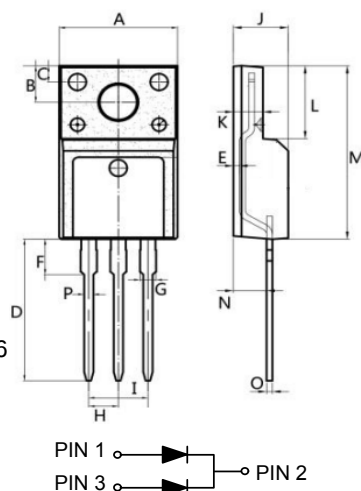

Dim.	Min.	Max.
A	9.95	10.25
B	2.95	3.25
C	1.25	1.45
D	12.95	13.25
E	0.50	0.65
F	2.80	3.30
G	1.30	1.45
H	Typ2.54	
I	Typ5.08	
J	4.50	4.75
K	2.50	2.65
L	6.35	6.55
M	15.40	16.00
N	2.75	3.05
O	0.48	0.52
P	0.76	0.84
All Dimensions in millimeters		

Mechanical Data

- **Case** : ITO-220AB
- **Terminals** : Solder plated, solderable per MIL-STD-750, Method 2026
- **Polarity** : Cathode line denotes the cathode end
- **Mounting Position** : Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load. For capacitive load, derate current by 20%

CHARACTERISTICS	Symbols	MURD1040DDFCT	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	400	V
Maximum RMS Bridge Input Voltage	V_{RMS}	280	V
Maximum DC Blocking Voltage	V_{DC}	400	V
Maximum Average Forward Rectified Current Per Leg Total	$I_{(AV)}$	5 10	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	70	A
Maximum Forward Voltage at 5A	V_F	1.3	V
Maximum DC Reverse Current $T_A=25^{\circ}C$ at Rated DC Blocking Voltage $T_A=125^{\circ}C$	I_R	1.0 100	μA
Maximum Reverse Recovery Time (Note1)	TRR	35	ns
Typical Thermal Resistance (Note2)	$R_{\theta JC}$	4	$^{\circ}C/W$
Operating Temperature Range	T_J	-55 to +150	$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to +150	$^{\circ}C$

NOTES: 1. Measured with $I_F = 0.5 A$, $I_R = 1 A$, $I_{rr} = 0.25 A$

2. Thermal resistance from Junction to case



MURD1040DDFCT

Superfast Recovery Rectifiers

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

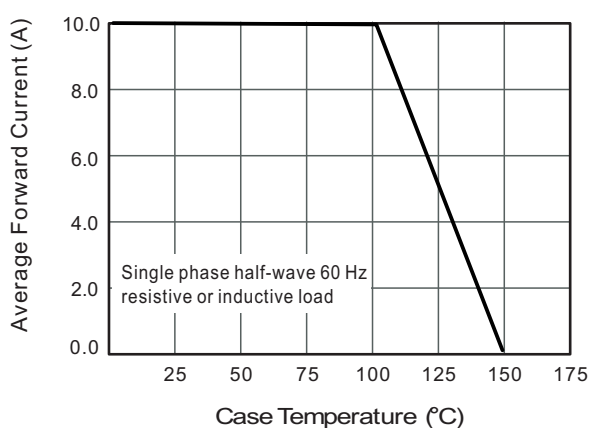


Fig.2 Typical Reverse Characteristics

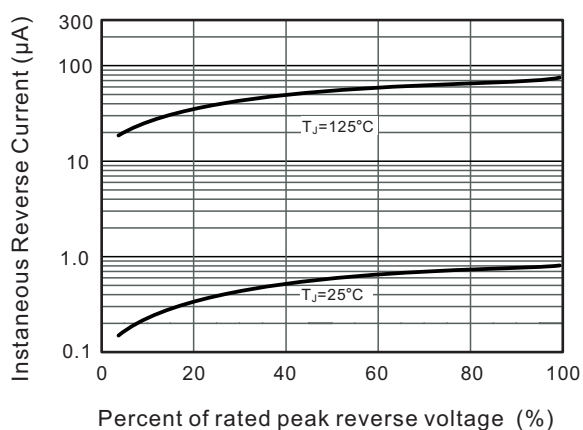


Fig.3 Typical Forward Characteristics

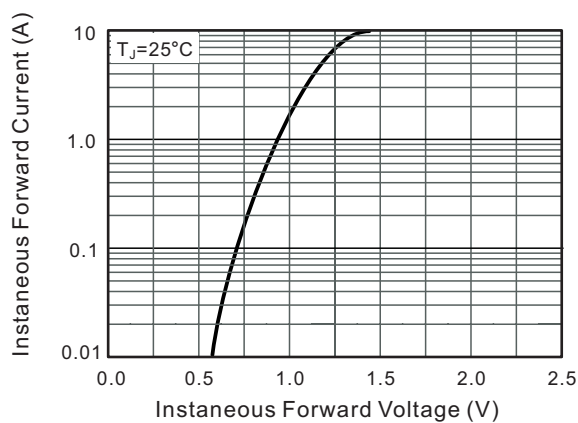


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

