







Rated Current (A)	Body Color	Rated Voltage	I _t
2	Gray	32V	3.0
3	Violet		10
4	Pink		17
5	Tan		30
7.5	Brown		72
10	Red		120
15	Light Blue		350
20	Yellow		530
25	Clear		1250
30	Green		1700

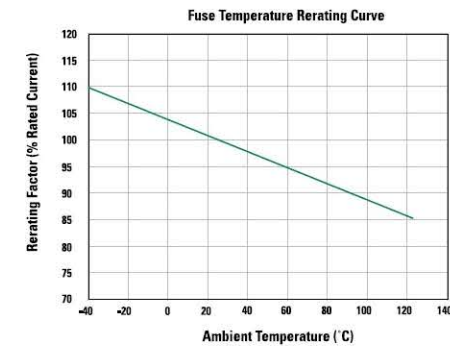

Unit: ±0.2mm

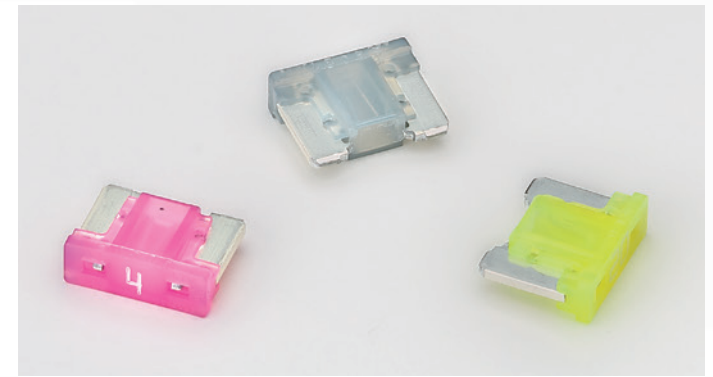

Interrupting Ratings: 1000A @ 32 VDC
 Operating Temperature Range: -40°C to +120°C

% of Rated Current	Operating Time
110%	100 h
135%	0.75 ~1800 s
200%	0.15~5 s
350%	0.08~ 0.5 s
600%	0.02~0.2s

Materials:

Body: Color-Coded P.C.;
 Terminals: Zinc alloy.

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN MM
 TOLERANCE
 DECIMALS ANGULAR
 X ± 0.5 ± 2°
 XX ± 0.25
 DO NOT SCALE DRAWING



P/N	
REV	1.5

CUSTOMER NO.

DRAWN BY Lin

CHECKED BY Shuai

APPROVED BY Hao

DATE 2011.7.6

SCALE

Vicfuse 深圳市威可特电子科技有限公司

TITLE

Fast-acting blade type fuses

PART NO. ATT Series

DRAWING NO. Vicfused20110706003