


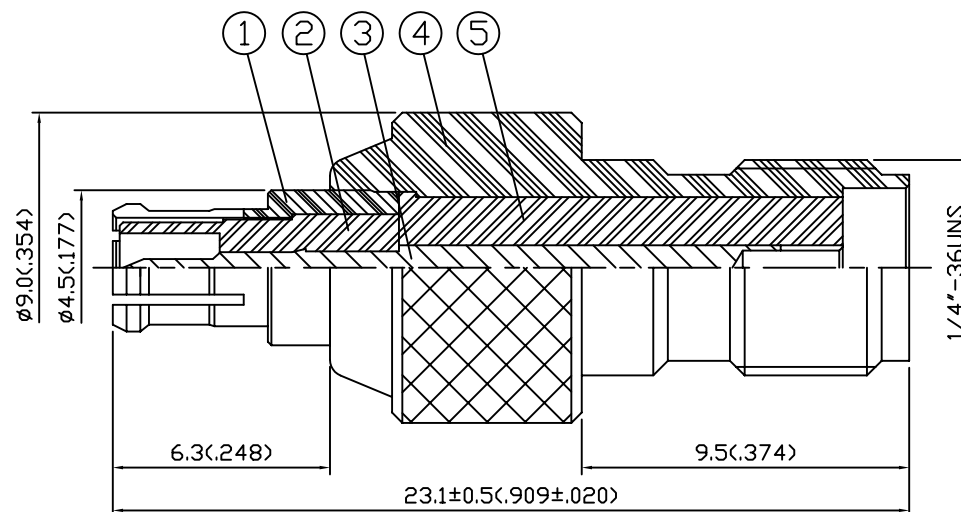

NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
BERYLLIUM COPPER PER JIS-C1730B
2. PIN: BERYLLIUM COPPER PER JIS-C1730B
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
CONNECTOR INTERFACE PER CECC 22220
5. PART TO BE CLEAN AND FREE OF BURRS

5	INSULATION	TEFLON	1	NONE
4	BODY	BRASS	1	GOLD 3μ" MIN.
3	PIN	Be Cu	1	GOLD 50μ" MIN.
2	INSULATION	TEFLON	1	NONE
1	CHASSIS	Be Cu	1	GOLD 3μ" MIN.
NO	DESCRIPTION	MATERIAL	Q' TY	FINISH

製圖	DRAWN	TOLERANCE		品名		901227 (50Ω)	日期	DATE	版次	REV.			
		.X	±0.2	TITLE				12.29.01	A-0				
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO.	901227		佳楠精密電子股份有限公司	CHIN NAN PRECISION ELECTRONICS CO.,LTD.			
		.XXX	±0.05		mm								
認定	APPROVAL	ANGLE	±5°	比例	SCALE								
				6:1									