


NO	DESCRIPTION	DATE
①	REDUCE SPRING FROM 2 PCS TO 1 PC	06.06.97'
②	BACKGROUND FORMAT UPDATED	05.02.02'
③	RUBBER → SILICONE BACKGROUND FORMAT UPDATED	07.21.09'

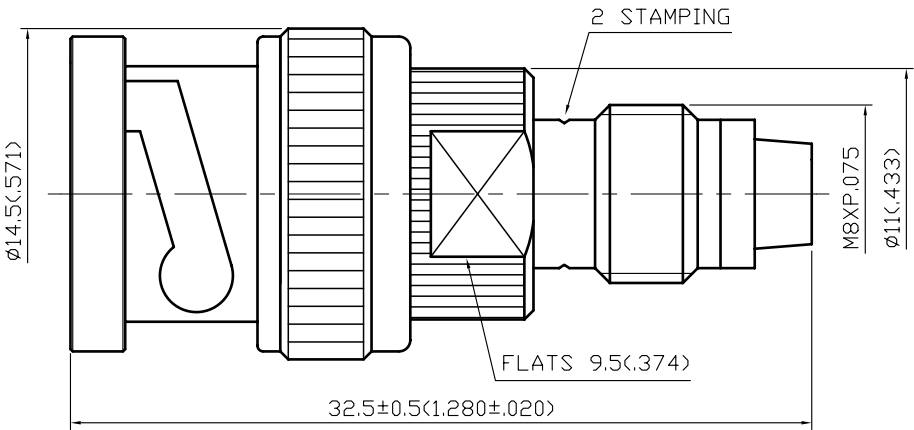

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-900 MHz

1.2 NOMINAL IMPEDANCE: 50 OHM

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS-C3604

2.2 CENTER CONTACT: BRASS PER JIS-C3604

2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 ENVIRONMENTAL

4.1 OPERATING TEMPERATURE RANGE: -55° C TO +125° C

9	INSULATION II	TEFLON	1	NONE
8	CENTER CONTACT	BRASS	1	GOLD
7	BODY	BRASS	1	NICKEL 100 μ" MIN.
6	WASHER	BRASS	1	NICKEL
5	SPRING WASHER	SK-5	1	NICKEL
4	WASHER	BRASS	1	NICKEL
3	GASKET	SILICONE	1	RED
2	INSULATION I	TEFLON	1	NONE
1	SHELL	BRASS	1	NICKEL 100 μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED

by _____ DATE: _____

DESCRIPTION		FME JACK - BNC PLUG							
製圖	DRAWN	TOLERANCE		品名	23-16	T.G.N	日期	DATE	版次
	Yoko	.X	±0.2	TITLE	\ROHS COMPLIANT <50Ω>		07.10.92'		A-3
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO. 23-0048			
	Jacky	.XXX	±0.05	比例	SCALE				
認定	APPROVAL	.XXX	±5°	比例	SCALE				
	Lewis	ANGLE	±5°						



佳楠精密電子股份有限公司
CHIN NAN PRECISION ELECTRONICS CO.,LTD.