






THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION 
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
BREAK DISTANCE - - - - - .040 APPROX	CONTACT ARRANGEMENT 8X S P D T	DO NOT SCALE PRINT
	15A-1/3 HP-125 OR 250 VAC 1/2A-125 VDC; 1/4A-250 VDC	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
		WEIGHT 6.5 OZ MAX

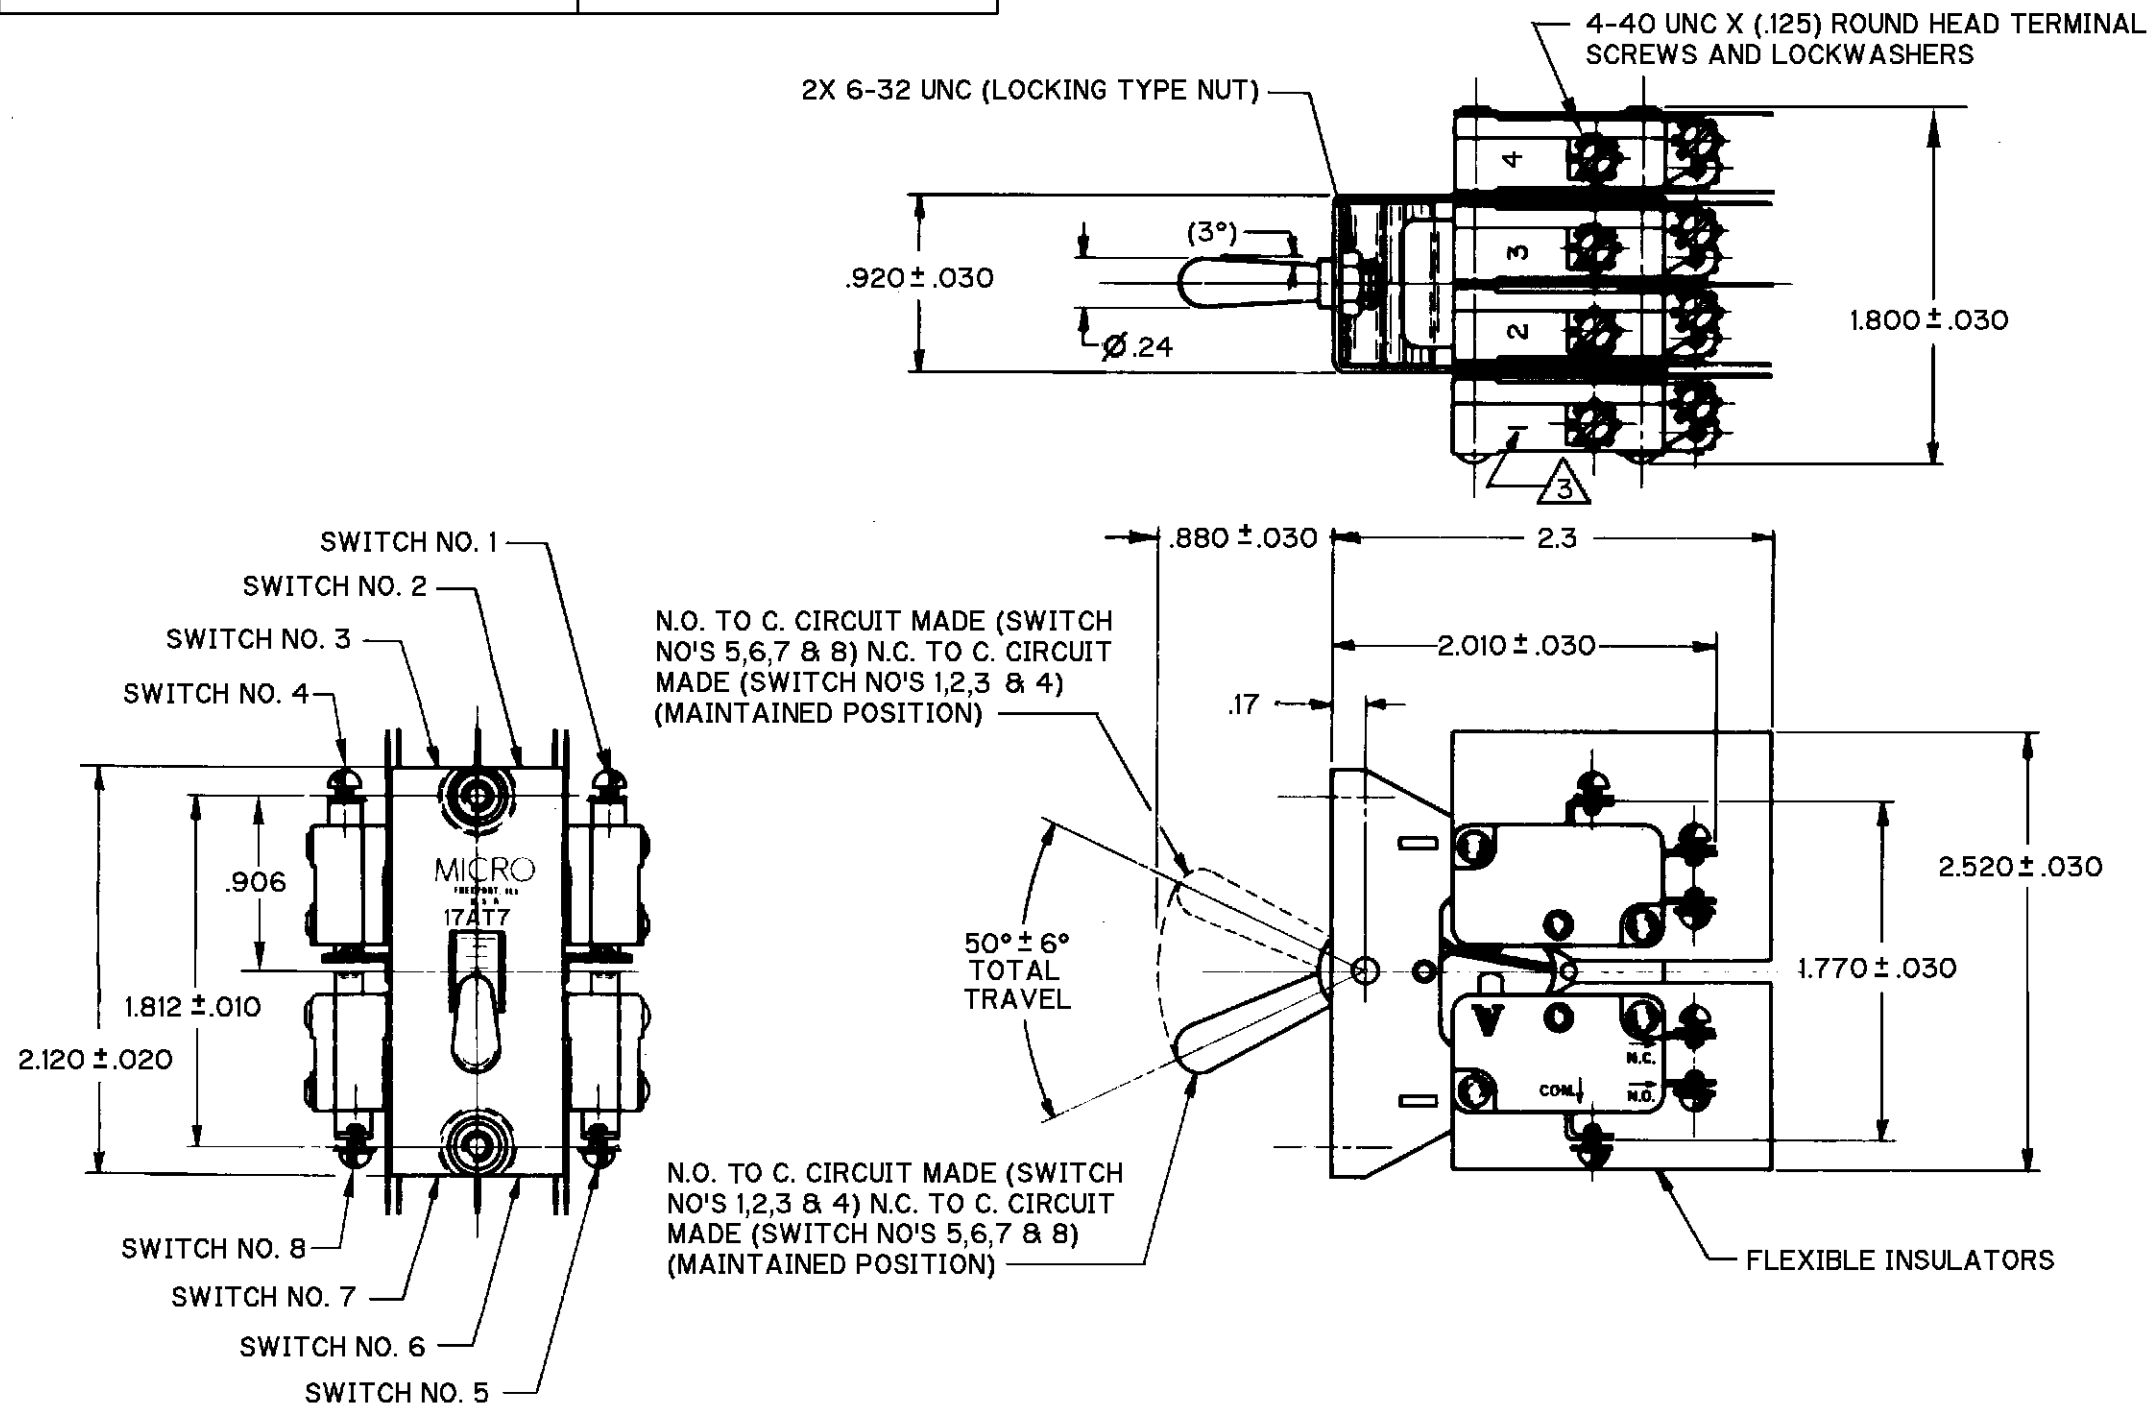

NOTES

- 1 - UNIT INCLUDES 8X CATALOG LISTING V3-1 BASIC SWITCHES
- 2 - SWITCHES DO NOT OPERATE SIMULTANEOUSLY
- 3 - BASIC SWITCH NUMBER MARKED ON EACH BASIC SWITCH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION 
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
BREAK DISTANCE - - - - - .040 APPROX	CONTACT ARRANGEMENT 8X S P D T	DO NOT SCALE PRINT
	15A-1/3 HP-125 OR 250 VAC 1/2A-125 VDC; 1/4A-250 VDC	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
		WEIGHT 6.5 OZ MAX