
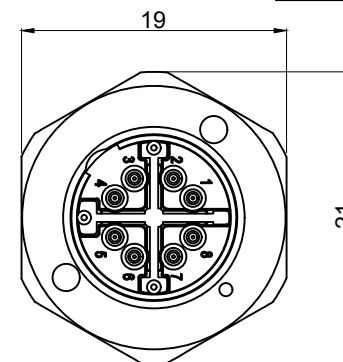
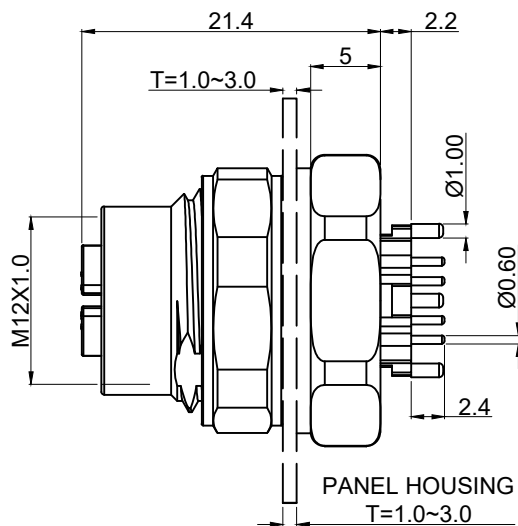
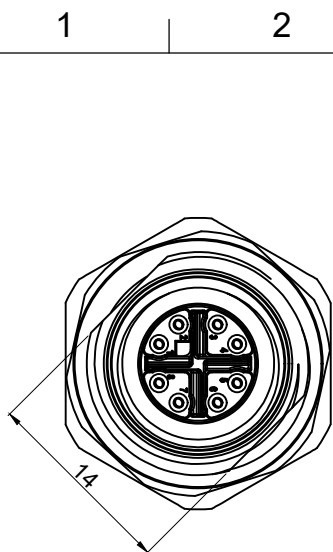


RECOMMENDED PCB LAYOUT

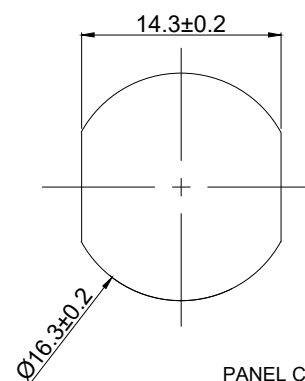

PANEL CUT OUT

Mark	Qty	Engineering Change Area

NOTE:

1. ELECTRICAL:

1.1.RATED VOLTAGE:50VAC/60 DC

1.2.RATED CURRENT:0.5A

1.3.CONTACT RESISTANCE:≤15mΩ

1.4.INSULATION RESISTANCE:≥100MΩ

1.5.Rated impulse voltage:800V

2. ENVIRONMENTAL:

2.1.OPERATING TEMPERATURE: -25°C TO +85°C

2.2.PROTECTION GRADE:IP67,WHEN TIGHT LOCKED

2.3.POLLUTION DEGREE:3

3.CONTACT MATERIAL: BRASS NI PLATED UNDER GOLD PLATED


4.CONFORM TO IEC 61076-2-109

* UNLESS OTHERWISE SPECIFIED
TOLERANCES ON DECIMAL IS:


X. ± 0.50 X° ± 2°

X.X ± 0.30

X.XX ± 0.20



All dimensions
are in mm

 All dimensions are in mm			Material:								
			Finishing:								
			Signature		Date		Phase Marking		Weight	Scale	拓宜(上海)工控电器设备有限公司 Topone(Shanghai) Industrial Control Electrical Equipment Co., Ltd
							1:1				
Created by								Part Name: C12B-FSX-RM-8 SH1			
Checked by				P/N		61060007					
Approved by				MD/CD						Rev. 01	
State		First Release						Page: 1 OF 1			