

ASSEMBLY- TOGGLE SWITCH

CATALOG LISTING
22AT63-4-M

22AT63-4-M
 PAGE 1 OF 1

M

DRAWING
 NUMBER

8

ISSUE

REPLACES

RELEASE NO. PR-12401

CHECK

REVISIONS

A 0020596
 TRF 31MAR06

CHECK

31MAR06

TRF


CHECK

31MAR06

RASTER

DRAWN

TRF

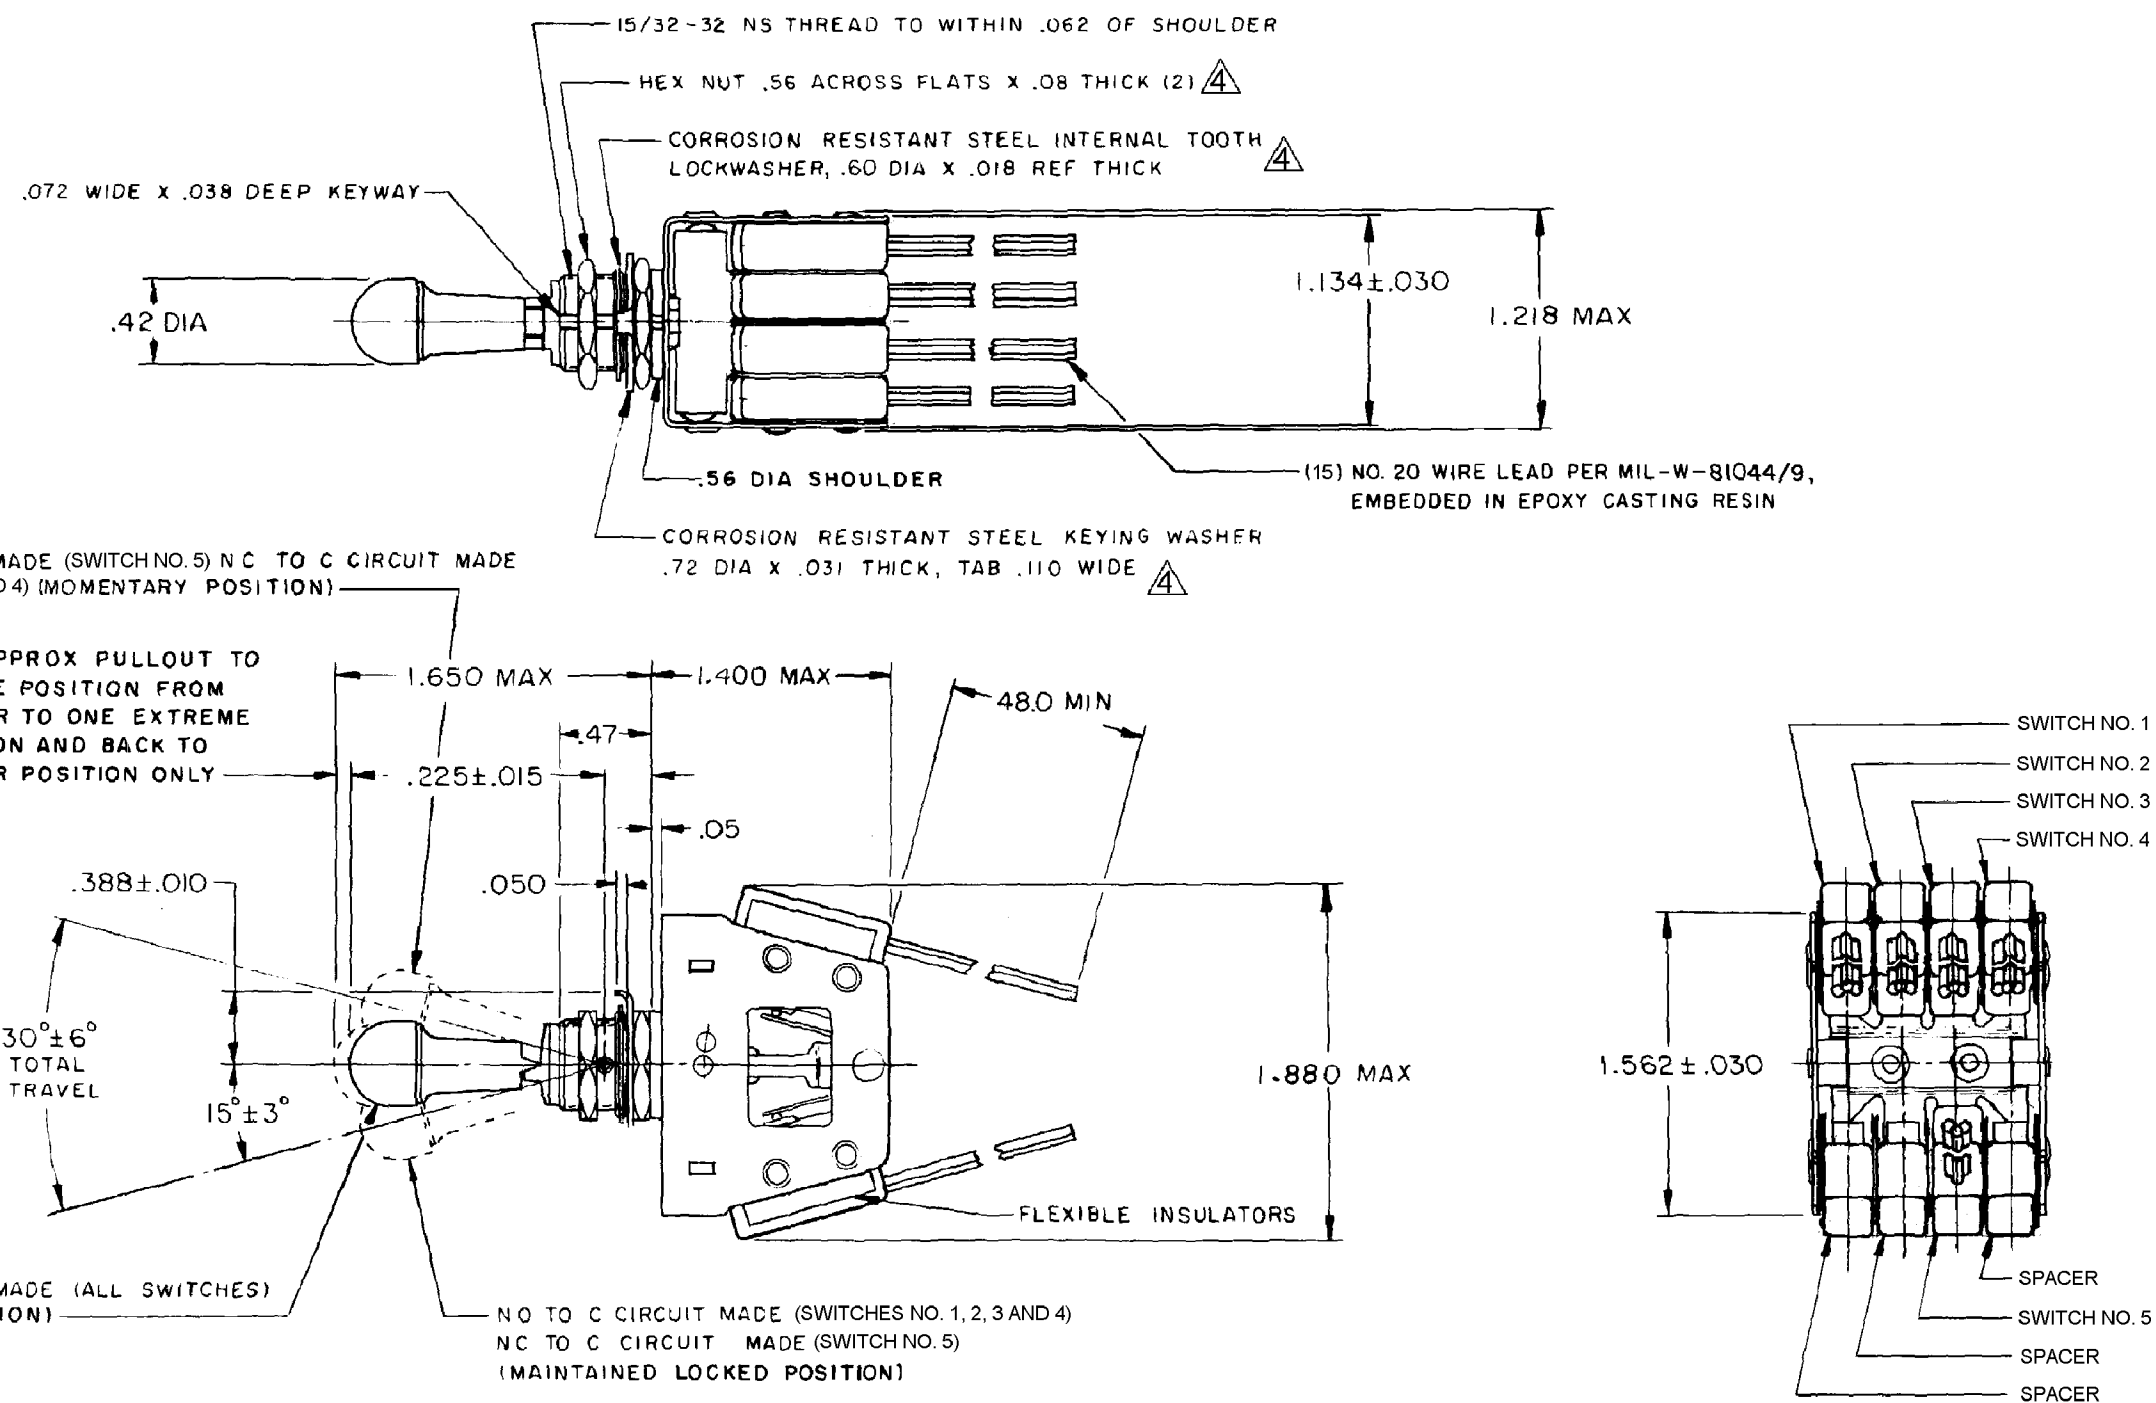

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
	CONTACT ARRANGEMENT SPDT (5)	DO NOT SCALE PRINT
250 VAC ————— 5 AMP		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
30 VOLTS DC RATING		TOLERANCES ARE:
INDUCTIVE ——— SEA LEVEL ——— 3 AMP		ONE PLACE (.0) ± .030
50,000 FT ——— 2.5 AMP		TWO PLACE (.00) ± .015
RESISTIVE ——— SEA LEVEL ——— 5 AMP		THREE PLACE (.000) ± .005
50,000 FT ——— 5 AMP		ANGLES ±
MAXIMUM INRUSH ——— 24 AMP		
		WEIGHT .65 LB MAX

NOTES

- 1 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 2 - UNIT INCLUDES 11SM1-T TYPE BASIC SWITCH (5)
- 3 - LEAD WIRES MARKED AT APPROXIMATELY 3.0 INCH INTERVALS WITH SWITCH NUMBER AND CIRCUIT IDENTIFICATION (1 - NO), (1 - NC), (1 - C), (2 - NC), (2 - C), (2 - NO), (3 - C), (3 - NC), (3 - NO), (4 - C), (4 - NC), (4 - NO), (5 - C), (5 - NC) AND (5 - NO)
- 4 - HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PRF-8805
- 5 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA312-AT