
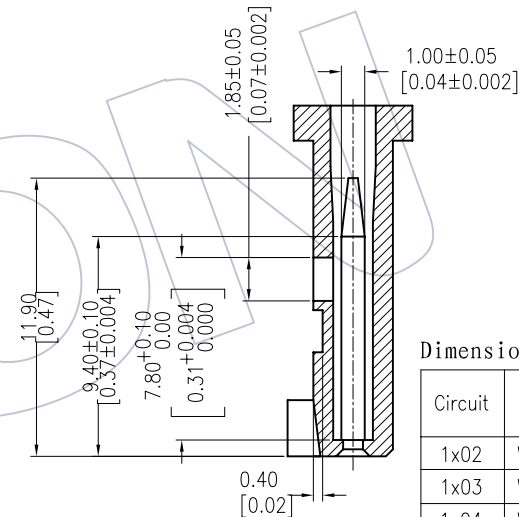

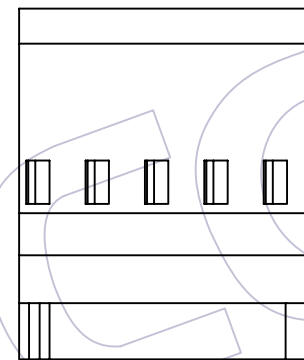
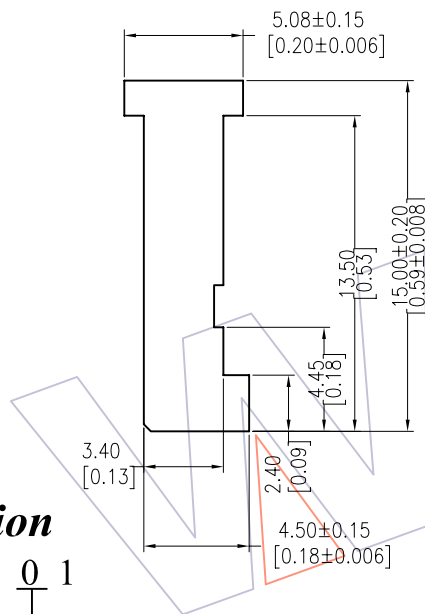


HSF

NOTES:
 Rated Current:3.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +85℃
 Insulator Material:PBT+30%G.F UL94V-0

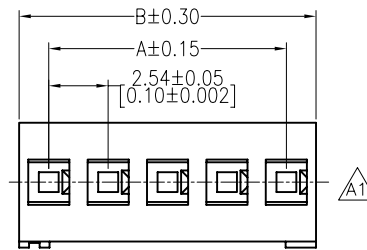

Section A-A

Ordering Information

WF2547 - 1 H XX X 0 1

No. of pins
02P~20P

Color
E=Beige
W=White
B=Black
U=Blue

Packing
0=PE Bag

Dimensional & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
1x02	WF2547-1H02U01	2.54	5.08
1x03	WF2547-1H03U01	5.08	7.62
1x04	WF2547-1H04U01	7.62	10.16
1x05	WF2547-1H05U01	10.16	12.70
1x06	WF2547-1H06U01	12.70	15.24
1x07	WF2547-1H07U01	15.24	17.78
1x08	WF2547-1H08U01	17.78	20.32
1x09	WF2547-1H09U01	20.32	22.86
1x10	WF2547-1H10U01	22.86	25.40
1x12	WF2547-1H12U01	27.94	30.48
1x15	WF2547-1H15U01	35.56	38.10
1x18	WF2547-1H18U01	43.18	45.72
1x20	WF2547-1H20U01	48.26	50.80

				OPERATION		DRAW BEN	DATE 2012/02/23	SCALE	FIT	PART NO. SEE TABLE	WCON Http: www.wcon.com WCON—Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON—Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X	±0.40			UNIT	mm		
A1	2012/02/23	Modify drawing	——	X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: "T" 2.54mm Housing Single Row	
AO	2009/07/23	NEW	——	X.XXX	±0.15			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'	APPROVE	DATE	PROJ.		Customer NO.	
				DIM	TOL						