


注記

- 1) 適用電線サイズ : CAVS 0.5
- 2) カハメス ターミナル品番 : 7116-1456
- 3) 適用オス コネクタ品番 : 7222-7735, 7222-7736-90

△ NOTES

- 1) APPLICABLE WIRE SIZE: CAVS 0.5
- 2) MATING FEMALE TERMINAL PART NO.: 7116-1456
- 3) APPLICABLE MALE CONNECTOR PART NO.: 7222-7735, 7222-7736-90

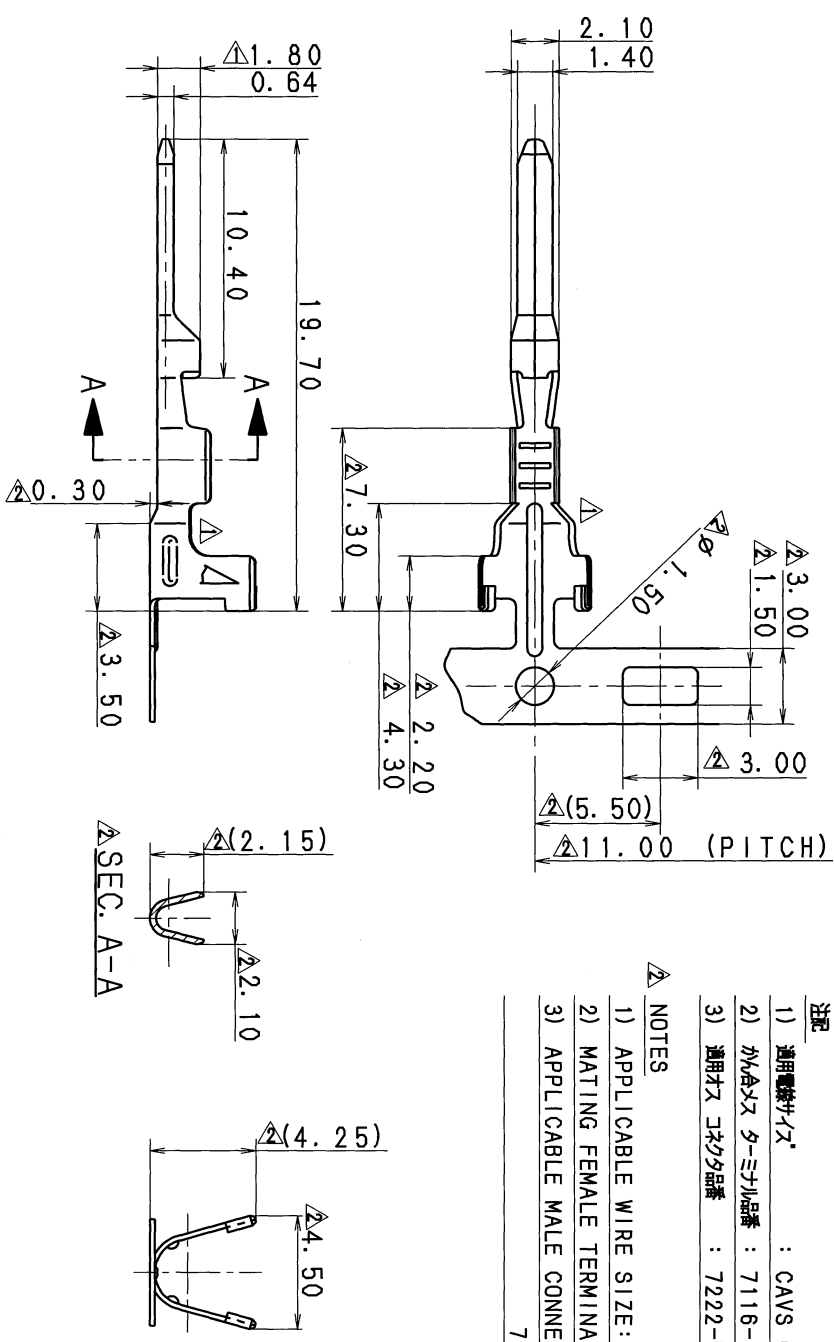

										MATERIAL SPEC.		Δ BRASS (t=0.25) & FIN.		TREAT. Δ Sn PLATING											
Δ 2012/02/08ADDED GENERAL TOLERANCE ETC.										C12-7228		J. N		CUSTOMER											
Δ 1989/03/09 CHANGED FORM										C89-6370		永野		CUSTOMER PART NO.		CUSTOMER DWG NO.									
1987/07/01 NEW										7MC-0310		大高		OFFICE		TRIAL PART NO.									
LET DATE										REVISION RECORD		NO.		CHKD		VENDOR									
Δ GENERAL TOLERANCE														VENDOR NO.											
A 10MAX 50MAX 100MAX 250MAX 2500VR										ANGLE		ECCENT		DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE	
A ±0.15 ±0.2 ±0.3 ±0.5 ±0.75 ±30'										±0.3 ±0.5 ±0.75 ±30'		0.1		R		NEW		1987/07/01		mm		5:1		3	
B ±0.2 ±0.3 ±0.55 ±0.95 ±1.4 ±30'										±0.3 ±0.5 ±0.75 ±30'		0.1		APPROVED		CHECKED		CHECKED		DESIGN		DRAWN			
C ±0.3 ±0.5 ±0.8 ±1.4 ±2 ±30'										±0.3 ±0.5 ±0.75 ±30'		0.15		M. KASHIYAMA		Y. FUKASE				大高		J. NICOLAS			
SPECIFIED										MASS				2012/02/08		2012/02/08				1987/07/01		2012/02/08			
																								</	

ISSUE MARK

TREAT. △ Sn PLATING

NAME △ YV TYPE TERMINAL (M)

PART NO. 7114-1456

DWG NO. 7114-1456:R

YAZAKI CORPORATION