

HSF

NOTES:

Rated Current:3.0AMP

Contact Resistance:20mΩ max

Withstand Voltage:1000V AC/DC


Insulation Resistance:1000MΩ min

Operation Temperature:-25℃ to +85℃

Insulator Material:PBT+30%G.F UL94V-0

Use with: WF2543-T

Mated with: WF2543-Wafer


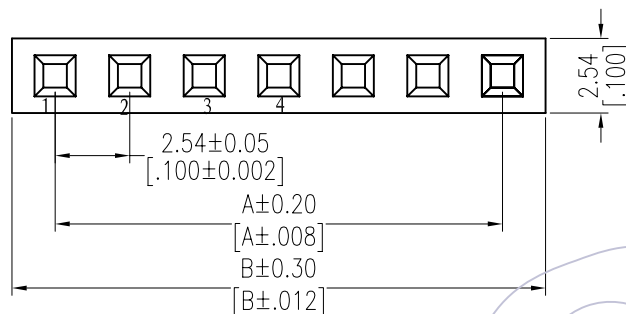


Ordering Information

WF2543 -1 H XX X 0 1



No.of pins
01P~20P
Color
W=White
B=Black
Packing
0=PE Bag

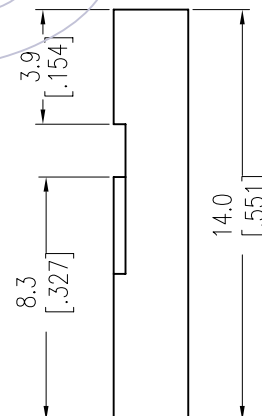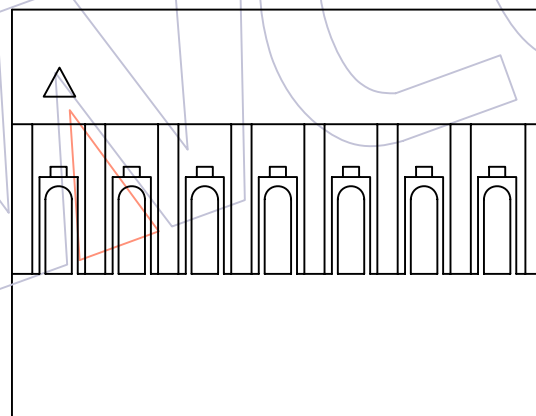

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
1x01	WF2543-1H01X01	2.54	2.54
1x02	WF2543-1H02X01	2.54	5.08
1x03	WF2543-1H03X01	5.08	7.62
1x04	WF2543-1H04X01	7.62	10.16
1x05	WF2543-1H05X01	10.16	12.7
1x06	WF2543-1H06X01	12.70	15.24
1x07	WF2543-1H07X01	15.24	17.78
1x08	WF2543-1H08X01	17.78	20.32
1x09	WF2543-1H09X01	20.32	22.86
1x10	WF2543-1H10X01	22.86	25.40
1x11	WF2543-1H11X01	25.40	27.94
1x12	WF2543-1H12X01	27.94	30.48
1x13	WF2543-1H13X01	30.48	33.02
1x14	WF2543-1H14X01	33.02	35.56
1x15	WF2543-1H15X01	35.56	38.10
1x16	WF2543-1H16X01	38.10	40.64
1x17	WF2543-1H17X01	40.64	43.18
1x18	WF2543-1H18X01	43.18	45.72
1x19	WF2543-1H19X01	45.72	48.26
1x20	WF2543-1H20X01	48.26	50.80

A2	2013/01/14	MODIFY PART NO.	—	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com	
A2	2012/12/28	MODIFY PART NO.	—	X.X ±0.40	JYHuang	2013/01/14	UNIT	mm	SEE TAB		
A1	2012/11/19	MODIFY DIM "B"	—	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:	SINGLE ROW 2.54 HOUSING	
AO	2012/09/08	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle DIM TOL			PROJ.			WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com