

HSF

NOTES:

Rated Current:3.0AMP

Contact Resistance:20m Ω max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω min

Operation Temperature:-25℃ to +85℃

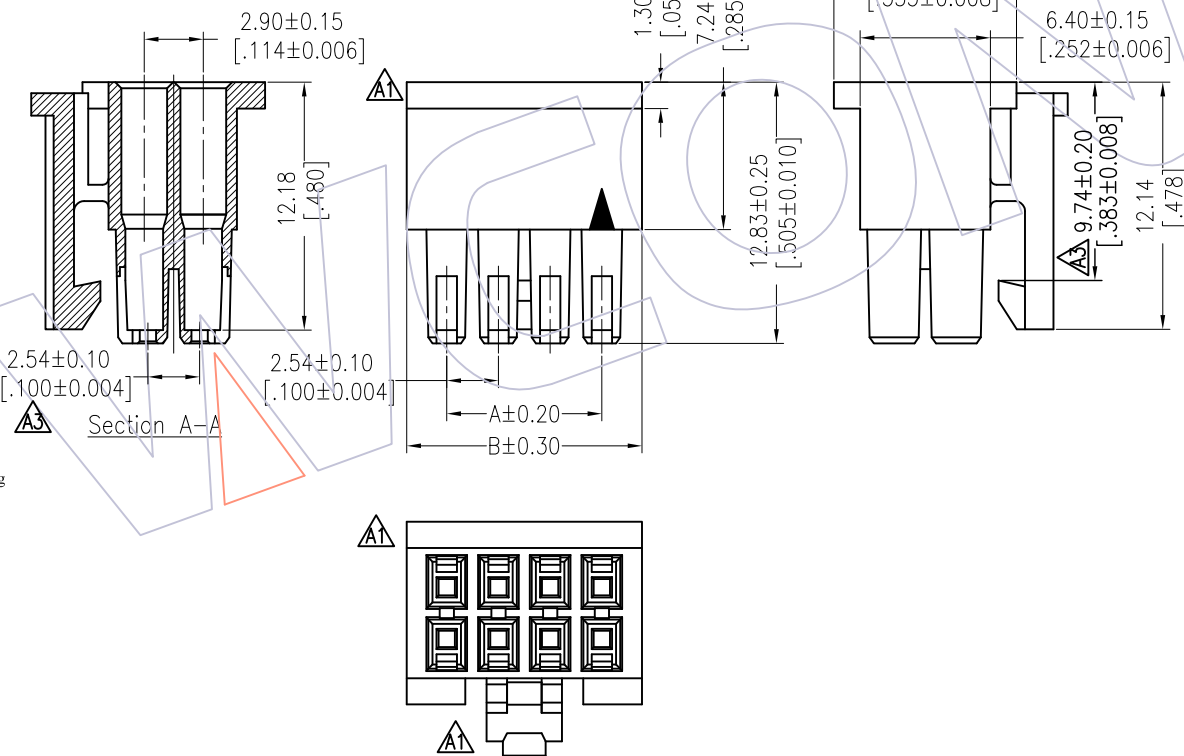
Insulator Material:PA66 (UL94-V0)

Use with:WF2549-T

Mated With:WF2549-Wafer

Ordering Information

WF2549- 2 H XX X 0 1

No.of Pins per
Row: 02~25PColour
W=White
B=BLACKPacking
0=PE Bag

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x02	WF2549-2H02X01	2.54	8.26
2x03	WF2549-2H03X01	5.08	9.02
2x04	WF2549-2H04X01	7.62	11.56
2x05	WF2549-2H05X01	10.16	14.10
2x06	WF2549-2H06X01	12.70	16.64
2x07	WF2549-2H07X01	15.24	19.18
2x08	WF2549-2H08X01	17.78	21.72
2x09	WF2549-2H09X01	20.32	24.26
2x10	WF2549-2H10X01	22.86	26.80
2x11	WF2549-2H11X01	25.40	29.34
2x12	WF2549-2H12X01	27.94	31.88
2x13	WF2549-2H13X01	30.48	34.42
2x14	WF2549-2H14X01	33.02	36.96
2x15	WF2549-2H15X01	35.56	39.50
2x16	WF2549-2H16X01	38.10	42.04
2x17	WF2549-2H17X01	40.64	44.58
2x18	WF2549-2H18X01	43.18	47.12
2x19	WF2549-2H19X01	45.72	49.66
2x20	WF2549-2H20X01	48.26	52.20
2x21	WF2549-2H21X01	50.80	54.74
2x22	WF2549-2H22X01	53.34	57.28
2x23	WF2549-2H23X01	55.88	59.82
2x24	WF2549-2H24X01	58.42	62.36
2x25	WF2549-2H25X01	60.96	64.90

A4	2018/02/09	ADD THE COLOR	—	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2016/07/27	MODIFY DRAWING	—	X.X	Ding	2018/02/09	UNIT		SEE TAB
A2	2013/05/10	ADD 2*03PIN ,2*02PIN DRAWING	—	X.XX	CHECK	DATE	SIZE	A4	TITLE:
AO	2012/09/10	NEW	—	X.XXX	APPROVE	DATE	SHEET	1/1	2.54mm HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle DIM	± 3° TOL		PROJ.		Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.comWCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com