


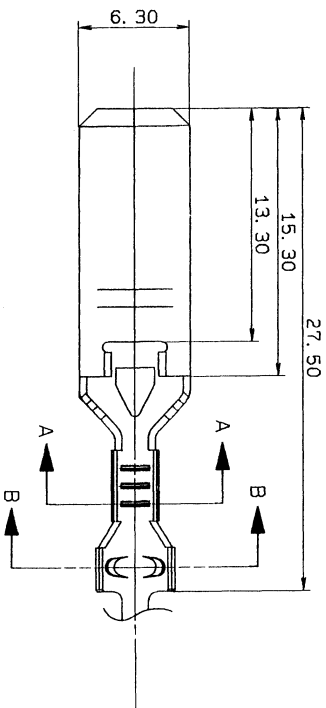


PART NO.	C	D	MATERIAL	TREAT & FIN	APPLICABLE WIRE SIZE
7114-2870	2.7	4.5	C2680 1-0.4		AV 0.5 AVS 0.3-0.5
7114-2870-02	2.7	4.5		TIN PLATED	AV 0.5 AVS 0.3-0.5
7114-2871	3.7	5.5			AV 0.85-2 AVS 0.85-2
7114-2871-02	3.7	5.5		TIN PLATED	AV 0.85-2 AVS 0.85-2
7114-2872	4.7	6.5			AV 3, AVS 3
7114-2872-02	4.7	6.5		TIN PLATED	AV 3, AVS 3



SECTION A-A

SECTION B-B

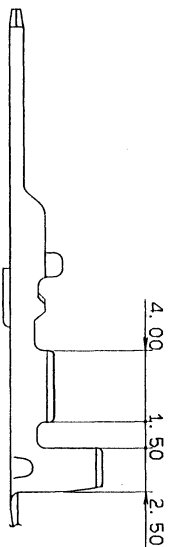

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30°	0.15
SPECIFIED							
WEIGHT							

CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.	MATL. SEE TABLE	TREAT. & FIN.	ISSUE MARK
OFFICE		STD LIB NO.	NAME	M TYPE TERMINAL (M)	
VENDOR NO.					

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	7114-2870 ETC.
R	NEW	90.09.07	mm	5/1	3		
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.	7114-2870:R
			SAKAI	T. MAKITA		TRIAL PART NO.	

LET	DATE	REVISION RECORD	NO.	CHKD
		NEW	390-L976 M.K	

YAZAKI CORPORATION	
--------------------	--