



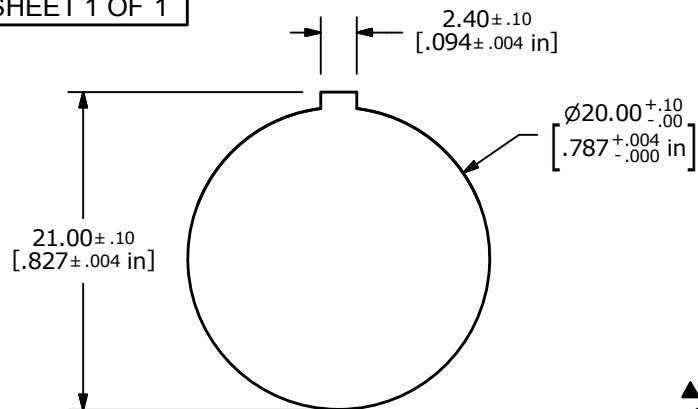




PANEL CUTOUT

| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| ON              | OFF    |
| 1-2             | OPEN   |



## NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 20A 125VAC T65 [UL, cUL]  
12A 250VAC T65 [UL, cUL]  
10(4)A 250V~ 5E4 T125/55 [ENEC10, VDE]
6. CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC
7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]  
50,000 CYCLES [ENEC10, VDE: 10(4)A 250V~]
10. OPERATING TEMPERATURE: -20°C TO 65°C [UR, cUR]  
-20°C TO 125°C [ENEC10, VDE: 10(4)A 250V~]
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

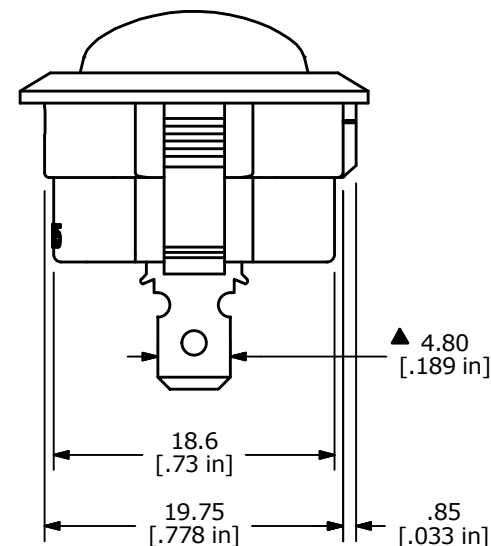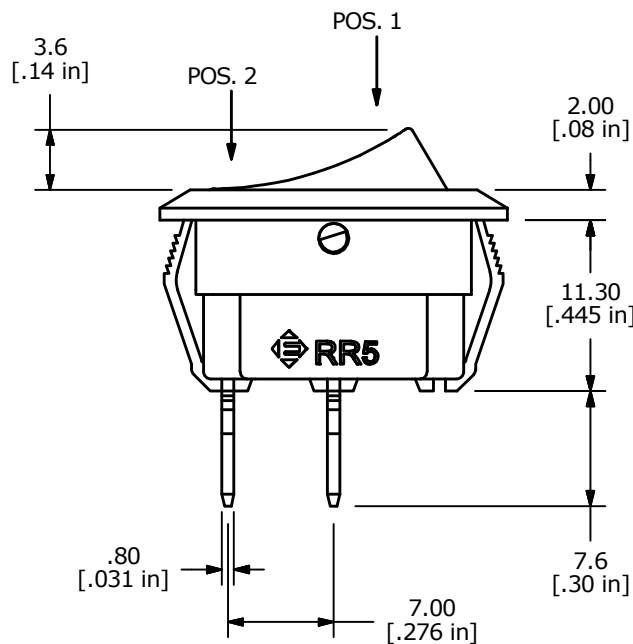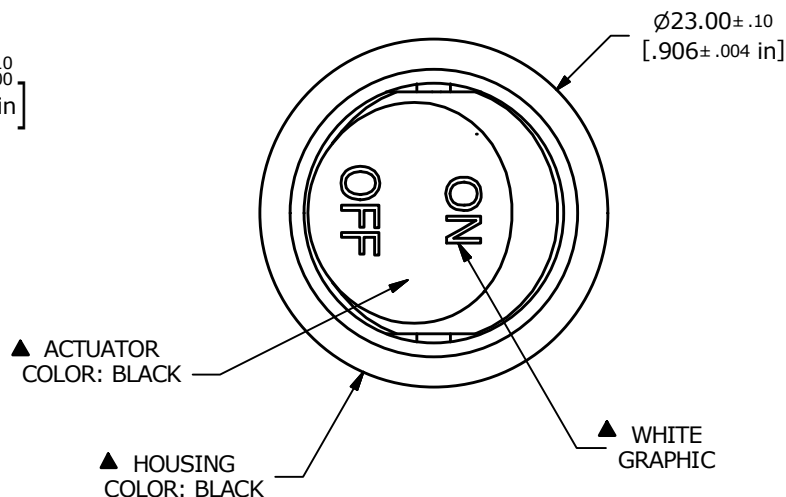

TITLE RR511D1123

|     |        |                        |         |    |
|-----|--------|------------------------|---------|----|
| A   | 22078  | RELEASE FOR PRODUCTION | 12/8/15 | MW |
| REV | PCR NO | DESCRIPTION            | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|              |                   |          |                      |          |
|--------------|-------------------|----------|----------------------|----------|
| SCALE<br>2:1 | DATE<br>12/8/2015 | DR<br>MW | DWG<br>14-RR511D1123 | REV<br>A |
|--------------|-------------------|----------|----------------------|----------|