

液态小型铝电解电容器产品编码规则



1	2	3	4	5	6	7	8	9	10	11	12	13	14
↓		↓		↓		↓		↓		↓		↓	
系列	代码	产品直径	代码	产品高度	代码	额定电压(V)	代码	静电容量(μF)	代码	容量范围	代码	附属码(国内)	
L3M	L3M	3.5	F	3.95	039	6.3	0J	0.1	R10	±20%	M	O	引线30F/35F
LMM	LMM	3.55	W	4.5	045	10	1A	0.22	R22	±10%	K	H	引线33F/38F
LK7	LK7	4	A	5	050	16	1C	0.33	R33	0%~+10%	R	F	引线22F/27F
LK	OLK	4.5	G	5.4	054	20	1D	0.47	R47	0%~+10%	T	A	切直脚A图
KCX	KCX	5	B	5.7	057	25	1E	0.56	R56	-10%~+20%	V	B	切脚成型B图
KCG	KCG	5.5	H	5.8	058	27	1N	0.68	R68	-20%~+5%	L	C	切脚成型C图
KCM	KCM	6.3	C	6.5	065	35	1V	0.82	R82	-10%~+5%	G	D	切脚成型D图
LKF	LKF	7	T	7	070	40	1G	1.0	1R0	-10%~+15%	H	E	切脚成型E图
LKM	LKM	8	D	7.7	077	50	1H	2.2	2R2	0%~+40%	I	Q	切脚折弯90° F图A型(右)
LKG	LKG	10	E	8	080	63	1J	3.3	3R3	±15%	J	P	切脚折弯90° F图B型(左)
LKZ	LKZ	12.5	L	8.5	085	70	1L	4.7	4R7	-20%~+50%	A	X	切脚成型G图
LLK	LLK	13	S	9	090	80	1K	5.6	5R6	-5%~+20%	B	g	切脚双折弯90° H图A型(右)
LKX	LKX	16	I	9.5	095	90	1F	6.8	6R8	-5%~+20%	E	f	切脚双折弯90° H图B型(左)
LKL	LKL	18	J	10	100	100	2A	8.2	8R2	-15%~+5%	C	K	编带A图
IKI(R)	IKI(R)	20	N	10.5	105	110	2R	10	100	-15%~+5%	D	J	编带B图
LKJ	LKJ	22	K	11	110	120	2K	22	220	0%~+20%	F	V	SMD
LKD	LKD	25	M	11.5	115	125	2B	33	330	0%~+15%	N	TM	涂膜
V4M	V4M			12	120	130	1Q	47	470	-5%~+15%	W	CG	车规
V3MC	V3MC			12.5	125	140	2Q	56	560	-20%~+0%	S	附属码(IND)	
V3M	V3M			13	130	160	2C	68	680	-20%~+10%	P	2	引线30F/35F
VMM	VMM			13.5	135	180	2M	82	820	0%~+5%	Q	3	引线33F/38F
VK7	VK7			14	140	200	2D	100	101			4	切直脚A图
VKO	VKO			14.5	145	250	2E	220	221			5	切脚成型B图
VKM	VKM			15	150	270	2N	330	331			6	切脚成型C图
VKG	VKG			16	160	300	2S	470	471			7	切脚成型D图
VKL	VKL			16.5	165	315	2F	560	561			8	切脚成型E图
VKL(R)	VKL(R)			17	170	320	1U	680	681			9	引线22F/27F
				18	180	330	2U	820	821			M	编带A图
				19	190	350	2V	1000	102			N	编带B图
				20	200	375	2P	1500	152				
				21	210	400	2G	2200	222				
				22	220	420	2T	3300	332				
				23	230	450	2W	4700	472				
				25	250	480	2L	6800	682				
				28	280	500	2H	10000	103				
				30	300	550	2I	22000	223				
				31.5	315	600	2J	33000	333				
				32	320	630	2Y						
				35.5	355	650	2X						
				36	360								
				40	400								
				41.5	415								
				45	450								
				50	500								



LKG


- ◆长寿命 耐高频大纹波电流 高频低阻抗 电源专用产品
- ◆105℃环境下8000~12000小时
- ◆符合AEC-Q200 RoHS指令对应品




主要技术参数

项目		特性									
使用温度范围		≤120V -55~+105℃ ； 160~500V -40~+105℃									
标称电压范围		10~500V									
容量允许偏差		±20% (25±2℃ 120Hz)									
漏电流(μA)		10~120WV I≤0.01CV or 3μA 取大者 C:标称容量(μF) V:额定电压(V) 2分钟读数									
		160~500WV I≤0.02CV+10(μA) C:标称容量(μF) V:额定电压(V) 2分钟读数									
损耗角正切值 (25±2℃ 120Hz)		额定电压(V)	10	16	25	35	50	63	80	100	
		tg δ	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.09	
		额定电压(V)	120	160	200	250	350	400	450	500	
		tg δ	0.09	0.09	0.08	0.08	0.10	0.10	0.12	0.20	
		标称容量超过1000μF者, 则每增加1000μF, 损耗角正切值增加0.02									
温度特性 (120Hz)		额定电压(V)		10	16	25	35	50	63	80	100
		阻抗比Z(-40℃)/Z(20℃)		6	4	3	3	3	3	3	3
		额定电压(V)		120	160	200	250	350	400	450	500
		阻抗比Z(-40℃)/Z(20℃)		5	5	5	5	7	7	7	8
耐久性		在105℃烘箱中, 施加含额定纹波电流的额定电压, 持续规定时间后, 置于常温16小时后测试, 测试温度: 25±2℃, 电容器的性能应满足如下要求									
		容量变化率				在初始值的±20%以内					
		损耗角正切值				在规定值的200%以下					
		漏电流				在规定值以下					
		负荷寿命				10~120WV		Φ5 8000小时			
								Φ6.3 10000小时			
160~500WV						≥Φ8 12000小时					
						Φ5~Φ6.3 10000小时 ≥Φ8 12000小时					
高温储存		在105℃下, 储存1000小时, 置于常温16小时后测试, 测试温度25±2℃, 电容器的性能应满足如下要求									
		容量变化率				在初始值的±20%以内					
		损耗角正切值				在规定值的200%以下					
		漏电流				在规定值的200%以下					

产品尺寸图 (单位: mm)

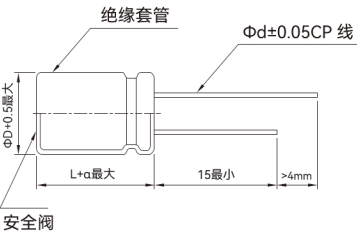

备注: ≥Φ6.3 产品有安全阀



L=9	α=1.0
L≤16	α=1.5
L > 16	α=2.0

D	5	6.3	8	10	12.5	16	18
d	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5

纹波电流补偿系数

①频率修正系数

频率(Hz)	50	120	1K	10K~50K	100K
修正因子	0.40	0.50	0.80	0.90	1.00

②温度修正系数

环境温度(℃)	50℃	70℃	85℃	105℃
修正因子	2.1	1.8	1.4	1.0



LKG

■ 标准品一览表

电压(V)	10			16			25			35		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)
10	5×9	1.05	57	5×9	1.05	72	5×9	1.05	92	5×9	1.50	102
15	5×9	1.05	77	5×9	1.05	92	5×9	1.05	112	5×9	1.50	122
22	5×9	0.40	92	5×9	0.4	112	5×9	0.40	122	5×9	1.50	170
33	5×9	0.40	107	5×9	0.4	122	5×9	0.40	152	5×9	0.40	220
39	5×9	0.40	137	5×9	0.4	152	5×9	0.40	182	5×11	0.36	240
47	5×9	0.25	144	5×9	0.25	162	5×9	0.25	212	5×11	0.32	350
56	5×9	0.25	152	5×9	0.25	172	5×9	0.25	320	6.3×9	0.32	495
68	5×9	0.25	162	5×9	0.25	182	5×11	0.23	350	6.3×11	0.260	550
68										8×9	0.260	580
82	5×9	0.25	172	5×9	0.25	212	6.3×9	0.20	550	6.3×11	0.250	550
82										8×9	0.250	580
100	5×9	0.25	182	5×11	0.23	350	6.3×9	0.20	550	6.3×11	0.250	550
100										8×9	0.250	580
120	5×9	0.25	320	5×11	0.23	550	6.3×11	0.0980	550	8×9	0.250	864
120							8×9	0.0980	580			
150	5×11	0.23	350	6.3×9	0.20	550	6.3×11	0.0980	550	8×11.5	0.0980	960
150							8×9	0.0980	580	10×9	0.0980	980
180	5×11	0.23	350	6.3×9	0.1600	550	8×9	0.0980	864	8×11.5	0.0980	960
180										10×9	0.0980	980
220	6.3×9	0.20	550	6.3×11	0.0980	550	8×11.5	0.0608	960	8×11.5	0.0980	1270
220				8×9	0.0980	580	10×9	0.0608	980			
270	6.3×9	0.1600	550	8×9	0.0980	580	8×11.5	0.0608	960	8×16	0.0700	1270
270							10×9	0.0608	980	10×12.5	0.0629	1330
330	6.3×11	0.0980	550	8×9	0.0980	864	8×14	0.0532	960	10×12.5	0.0629	1330
330	8×9	0.0980	580									
390	8×9	0.0980	580	8×11.5	0.0608	960	8×16	0.0485	1270	8×20	0.0550	1720
390				10×9	0.0608	980	10×12.5	0.0485	1270	10×16	0.0550	1850
470	8×9	0.0980	864	8×11.5	0.0608	960	10×12.5	0.0429	1330	10×16	0.0550	1850
470				10×9	0.0608	980				12.5×14	0.0550	1890
560	8×11.5	0.0608	960	8×16	0.0485	1270	8×20	0.0313	1530	10×20	0.0480	2250
560	10×9	0.0608	980	10×9	0.0485	1330	10×14	0.0313	1850	12.5×16	0.0480	2330
680	8×11.5	0.0608	960	8×16	0.0485	1270	10×16	0.0308	1850	10×23	0.0398	2330
680	10×9	0.0608	980	10×12.5	0.0429	1330				12.5×20	0.0350	2330
820	8×14	0.0585	1170	8×20	0.0313	1530	10×20	0.0280	2250	12.5×20	0.0280	2480
820	10×12.5	0.0608	1270	10×14	0.0313	1850	12.5×16	0.0350	2330			
1000	8×16	0.0485	1270	8×20	0.0313	1530	10×20	0.0280	2330	12.5×20	0.0280	2480
1000	10×12.5	0.0429	1330	10×16	0.0308	1850	12.5×16	0.0350	2330			
1200	8×20	0.0313	1530	10×16	0.0308	1960	12.5×20	0.0280	2480	12.5×25	0.0265	2900
1200	10×14	0.0308	1760									



LKG

■ 标准品一览表

电压(V)	10			16			25			35		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)
1500	8×20	0.0313	1530	10×20	0.0280	1960	12.5×20	0.0280	2480	12.5×30	0.0243	3450
1500	10×16	0.0308	1850	12.5×16	0.0350	2330				16×20	0.0265	3250
1800	10×20	0.0280	1960	10×20	0.0280	2250	12.5×25	0.0230	2900	12.5×35	0.0220	3570
1800	12.5×16	0.0201	2330	12.5×16	0.0280	2480				16×25	0.0243	3630
2200	10×20	0.0280	1960	12.5×20	0.0280	2480	12.5×25	0.0143	3450	16×25	0.0243	3630
2200	12.5×16	0.0201	2330				16×20	0.0165	3250			
2700	10×23	0.0198	2250	12.5×20	0.0218	2900	12.5×35	0.0132	3570	16×35.5	0.0210	4010
2700	12.5×20	0.0280	2480				16×25	0.0143	3630	18×31.5	0.0210	4180
3300	12.5×20	0.0280	2480	12.5×25	0.0165	3450	12.5×40	0.0121	3890	16×40	0.0210	4220
3300							16×25	0.0143	3630	18×35.5	0.0160	4220
3900	12.5×25	0.0165	2900	12.5×30	0.0143	3450	16×31.5	0.0121	3890	18×35.5	0.0160	4500
3900				16×20	0.0165	3250	18×25	0.0132	3650			
4700	12.5×30	0.0143	3450	12.5×30	0.0143	3570	16×31.5	0.0110	4010			
4700	16×20	0.0165	3450	16×25	0.0143	3630	18×25	0.0110	4180			
5600	12.5×30	0.0143	3570	16×31.5	0.0121	3890	18×35.5	0.0100	4220			
5600	16×20	0.0165	3250	18×25	0.0132	3650						
6800	12.5×35	0.0132	3570	16×31.5	0.0121	3890	18×40	0.0100	4500			
6800	16×25	0.0143	3630	18×25	0.0132	3650						
8200	16×31.5	0.0121	3890	16×35.5	0.0110	4010						
8200	18×25	0.0132	3650	18×31.5	0.0110	4010						
10000	16×31.5	0.0121	3890	18×35.5	0.0100	4080						
10000	18×25	0.0132	3650									

电压(V)	50			63			80			100		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)
0.47	5×9	4.00	22	5×9	3.00	24	5×9	3.00	25	5×9	3.00	25
1.0	5×9	4.00	32	5×9	3.00	35	5×9	3.00	36	5×9	3.00	36
1.2	5×9	4.00	32	5×9	3.00	35	5×9	3.00	36	5×9	3.00	36
1.5	5×9	4.00	38	5×9	3.00	42	5×9	3.00	44	5×9	3.00	44
1.8	5×9	4.00	38	5×9	3.00	42	5×9	3.00	44	5×9	3.00	44
2.2	5×9	1.50	40	5×9	3.00	46	5×9	3.00	48	5×9	3.00	48
2.7	5×9	1.50	40	5×9	3.00	56	5×9	3.00	56	5×9	3.00	56
3.3	5×9	1.50	55	5×9	3.00	60	5×9	3.00	63	5×9	3.00	63
3.9	5×9	1.50	55	5×9	3.00	79	5×9	3.00	82	5×9	1.35	82
4.7	5×9	1.50	90	5×9	3.00	99	5×9	3.00	102	5×9	1.35	102



LKG

■ 标准品一览表

电压(V)	50			63			80			100		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)
5.6	5×9	1.50	92	5×9	3.00	101	5×9	3.00	107	5×11	1.12	107
6.8	5×9	1.50	95	5×9	3.00	105	5×9	3.00	112	5×11	1.12	112
8.2	5×9	1.50	97	5×9	3.00	110	5×9	1.35	127	5×11	0.88	127
10	5×9	1.50	102	5×9	3.00	112	5×11	1.35	170	6.3×9	0.88	275
12	5×9	1.50	122	5×9	3.00	122	5×11	0.78	248	6.3×11	0.78	300
12										8×9	0.78	300
15	5×9	1.50	122	5×9	1.35	170	6.3×9	0.61	275	6.3×11	0.78	400
15										8×9	0.78	416
18	5×9	1.05	170	5×11	0.78	278	6.3×9	0.61	275	6.3×11	0.61	400
18										8×9	0.61	416
22	5×11	0.95	180	6.3×9	0.74	356	6.3×11	0.78	400	8×11.5	0.39	462
22							8×9	0.78	416	10×9	0.39	500
27	5×11	0.95	180	6.3×9	0.61	356	6.3×11	0.78	400	8×11.5	0.27	585
27							8×9	0.78	416	10×9	0.27	624
33	6.3×9	0.74	356	6.3×11	0.38	400	6.3×11	0.61	400	8×11.5	0.27	585
33				8×9	0.38	482	8×9	0.61	416	10×9	0.27	624
39	6.3×9	0.62	356	6.3×11	0.38	400	8×11.5	0.39	462	8×16	0.27	585
39				8×9	0.38	482	10×9	0.61	500	10×12.5	0.27	624
47	6.3×11	0.32	356	6.3×11	0.32	520	8×11.5	0.39	462	8×16	0.27	585
47	8×9	0.26	395	8×9	0.24	520	10×9	0.61	500	10×12.5	0.27	624
56	6.3×11	0.21	666	8×9	0.24	520	8×11.5	0.27	585	10×12.5	0.25	750
56	8×9	0.21	666				10×9	0.28	585			
68	8×9	0.21	666	8×11.5	0.23	520	8×16	0.27	585	8×20	0.20	770
68				10×9	0.24	535	10×12.5	0.25	624	10×14	0.19	780
82	8×11.5	0.15	740	8×11.5	0.17	722	8×20	0.25	624	10×16	0.19	780
82	10×9	0.15	666	10×9	0.17	650	10×12.5	0.25	624	12.5×14	0.18	858
100	8×11.5	0.15	740	8×16	0.17	722	8×20	0.20	800	10×20	0.13	1040
100	10×9	0.15	666	10×12.5	0.17	722	10×16	0.19	780	12.5×16	0.14	975
120	8×14	0.13	970	8×16	0.17	722	10×16	0.19	780	10×23	0.12	1170
120	10×12.5	0.13	985	10×12.5	0.17	722	12.5×14	0.18	858	12.5×20	0.0930	1430
150	8×16	0.11	970	8×20	0.12	890	10×20	0.13	1040	12.5×20	0.0930	1430
150	10×12.5	0.11	985	10×16	0.12	998	12.5×16	0.14	975			
180	8×20	0.10	1220	10×16	0.12	998	10×20	0.13	1040	12.5×25	0.0660	1620
180	10×14	0.10	1370				12.5×16	0.14	975			
220	8×20	0.0500	1220	10×20	0.0860	1200				12.5×25	0.0660	1620
220	10×16	0.0460	1370	12.5×16	0.0804	1250	12.5×20	0.0940	1430			
270	10×20	0.0420	1580	10×20	0.0860	1200	12.5×20	0.0940	1430	12.5×30	0.0560	1950
270	12.5×14	0.0500	1752	12.5×16	0.0804	1250				16×20	0.0640	1750
330	10×20	0.0420	1580	10×23	0.0760	1410	12.5×20	0.0660	1620	12.5×35	0.0470	2140



LKG

■ 标准品一览表

电压(V)	50			63			80			100		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)
330	12.5×16	0.0500	1752	12.5×20	0.0660	1570				16×25	0.0480	2210
390	10×20	0.0420	1870	12.5×20	0.0660	1570	12.5×30	0.0560	1950	12.5×40	0.0400	2340
390							16×20	0.0640	1750	16×25	0.0480	2210
470	12.5×20	0.0560	2050	12.5×25	0.0470	1990	12.5×35	0.0470	2140	16×31.5	0.0360	2400
470							16×25	0.0480	2210	18×25	0.0420	2270
560	12.5×20	0.0560	2410	12.5×30	0.0390	2410	12.5×40	0.0400	2340	16×35.5	0.0320	2600
560				16×20	0.0390	2410	16×25	0.0480	2210	18×31.5	0.0340	2470
680	12.5×25	0.0560	2410	12.5×30	0.0360	2620	16×31.5	0.0360	2400	16×40	0.0300	2860
680				16×25	0.0350	2730	18×25	0.0420	2270	18×35.5	0.0300	2860
820	12.5×25	0.0450	2960	12.5×35	0.0300	2940	16×35.5	0.0320	2600	18×40	0.0285	3510
820	16×20	0.0420	2730	16×25	0.0350	2730	18×25	0.0420	2270			
1000	12.5×30	0.0350	2960	16×31.5	0.0260	2990	16×40	0.0300	2860			
1000	16×25	0.0350	3010	18×25	0.0340	2800	18×31.5	0.0340	2470			
1200	16×31.5	0.0247	3280	16×31.5	0.0260	2990	18×35.5	0.0300	2860			
1200	18×25	0.0323	3060	18×25	0.0340	2800						
1500	16×31.5	0.0247	3280	16×35.5	0.0230	3040	18×40	0.0285	3510			
1500	18×25	0.0323	3300	18×31.5	0.0280	3300						
1800	16×35.5	0.0218	3040	16×40	0.0210	3570						
1800	18×31.5	0.0266	3300	18×35.5	0.0220	3570						
2200	18×35.5	0.0210	3570	18×40	0.0285	3900						
2700	18×40	0.0200	3900									

电压(V)	120			160			200			250		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)
0.47	5×9	3.00	25									
1.0	5×9	3.00	38	5×11	27.00	52	5×11	27.00	52	6.3×9	26.00	72
1.2	5×9	3.00	38	5×11	27.00	57	5×11	27.00	57	6.3×9	26.00	72
1.5	5×9	3.00	44	5×11	27.00	64	5×11	27.00	64	6.3×9	26.00	72
1.8	5×9	3.00	44	5×11	27.00	70	5×11	27.00	70	6.3×9	26.00	108
2.2	5×9	3.00	48	5×11	27.00	77	5×11	27.00	77	6.3×9	26.00	117
2.7	5×9	3.00	56	5×11	27.00	85	5×11	27.00	85	6.3×9	26.00	117
3.3	5×9	3.00	63	5×11	27.00	95	6.3×9	26.00	108	6.3×9	10.15	140
3.9	5×11	1.35	82	5×11	21.00	108	6.3×9	16.00	108	6.3×11	10.15	140
3.9										8×9	10.15	144
4.7	5×11	1.35	102	6.3×9	21.00	108	6.3×11	10.15	130	6.3×11	10.15	144



LKG

■ 标准品一览表

电压(V)	120			160			200			250		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)
4.7							8×9	10.15	153	8×9	10.15	144
5.6	6.3×9	1.12	107	6.3×9	12.78	130	6.3×11	10.15	130	8×9	10.15	144
5.6							8×9	10.15	153			
6.8	6.3×9	1.12	112	6.3×11	12.78	130	8×9	10.15	153	8×9	10.15	160
6.8				8×9	12.78	117						
8.2	6.3×9	1.12	127	8×9	12.78	140	8×9	10.15	160	8×11.5	10.15	160
8.2										10×9	10.15	144
10	6.3×11	0.88	275	8×9	12.78	140	8×11.5	10.15	170	8×11.5	9.50	290
10							10×9	10.15	180	10×9	9.50	365
12	8×9	0.80	300	8×11.5	10.15	168	8×14	8.5	270	8×14	8.5	270
12				10×9	10.15	168						
15	8×11.5	0.78	358	8×11.5	10.00	261	8×16	3.65	290	8×16	3.65	290
15	10×9	0.78	358	10×9	10.00	261	10×12.5	4.50	365	10×12.5	3.24	380
18	8×11.5	0.61	358	8×14	7.50	290	8×20	3.24	370	8×20	3.24	370
18	10×9	0.61	358	10×9	7.50	261	10× 14	3.24	380	10×14	3.24	400
22	8×14	0.48	450	8×14	7.50	350	8×20	3.24	370	8×20	3.24	370
22	10×9	0.48	450	10×12.5	7.50	380	10×14	3.24	400	10×14	3.24	400
27	8×16	0.37	550	8×16	2.65	350						
27	10×12.5	0.37	550	10×12.5	2.65	380						
33	8×16	0.37	585	8×20	2.65	650	10×20	1.65	650	10×20	1.65	650
33	10×12.5	0.37	585	10×14	2.65	760	12.5×14	1.65	760	12.5×14	1.65	760
39	8×20	0.28	624	10×16	2.65	650						
39	10×14	0.28	624	12.5×14	2.65	760						
47	10×14	0.28	624	10×20	2.65	750	12.5×20	1.38	980	12.5×20	1.38	980
47				12.5×14	2.65	760						
56	10×16	0.25	750	10×20	2.65	920	12.5×20	1.38	980	12.5×20	1.38	980
56	12.5×14	0.25	750	12.5×16	2.27	1180						
68	10×20	0.21	770	12.5×16	2.27	1280	12.5×25	1.25	1300	12.5×25	1.25	1300
68	12.5×14	0.21	780				16×20	1.25	1420	16×20	1.25	1420
82	12.5×16	0.19	900	12.5×20	2.27	1280	12.5×25	1.25	1390	12.5×30	1.15	1390
82							16×20	1.18	1420	16×20	1.18	1420
100	12.5×20	0.13	1040	12.5×20	2.27	1280	12.5×30	1.15	1390	16×25	1.18	1950
100							16×20	1.18	1420	18×20	1.02	1950
120	12.5×20	0.12	1240	12.5×25	1.43	1550	12.5×30	1.15	1420	18×20	1.02	1950
120				16×20	1.25	1420	16×25	1.18	1950	16×31.5	0.98	1990
150	12.5×25	0.0930	1430	12.5×30	1.43	1960	16×25	1.18	1950	16×31.5	0.98	2030
150	16×20	0.0930	1430	16×25	1.43	1890				18×25	0.98	2030
180	16×20	0.0930	1530	16×25	1.43	1890	16×35.5	0.80	2300	16×35.5	0.80	2300
180							18×31.5	0.80	2300	18×31.5	0.80	2300



LKG

■ 标准品一览表

电压(V)	120			160			200			250		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)
220	16×25	0.0660	1750	16×31.5	1.14	2450	18×31.5	0.80	2300	18×35.5	0.74	2680
220	18×20	0.0660	1750	18×25	1.14	2370						
270	16×31.5	0.0560	1950	16×31.5	1.14	2450						
270	18×25	0.0640	1950									
330	16×31.5	0.0470	2210	18×31.5	1.10	3200						
330	18×25	0.0480	2210									
390	16×35.5	0.0400	2430	18×35.5	0.95	3450						
390	18×31.5	0.0400	2430									
470	18×35.5	0.0320	2600									
560	18×40	0.0320	2860									

电压(V)	350			400			450			500		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)
1.0	6.3×9	55.00	81	6.3×9	55.00	77	6.3×9	55.00	81	6.3×12	55.00	48
1.2	6.3×9	34.00	99	6.3×9	34.00	81	6.3×9	50.00	81	6.3×12	50.00	48
1.5	6.3×9	34.00	99	6.3×9	34.00	81	6.3×9	50.00	81	6.3×12	50.00	48
1.8	6.3×9	34.00	99	6.3×9	34.00	81	6.3×11	45.00	86	8×11.5	45.00	84
1.8							8×9	38.00	86			
2.2	6.3×9	34.00	130	6.3×9	28.00	100	8×9	38.00	95	8×11.5	16.50	90
2.7	6.3×11	23.00	144	8×9	23.00	144	8×9	38.00	126	8×14	12.00	110
2.7	8×9	23.00	144									
3.3	8×9	16.00	144	8×9	16.00	160	8×11.5	28.00	140	8×14	12.00	110
3.3							10×9	28.00	150			
3.9	8×9	16.00	155	8×11.5	16.00	160	8×11.5	28.00	140	8×16	12.00	130
3.9				10×9	16.00	220	10×9	28.00	150			
4.7	8×11.5	16.00	155	8×11.5	16.00	160	8×14	21.80	175	8×20	12.00	130
4.7	10×9	16.00	180	10×9	16.00	220	10×9	18.50	180			
5.6	8×11.5	12.50	200	8×14	12.50	240	8×16	12.50	190	10×16	12.00	140
5.6	10×9	16.00	170	10×12.5	12.50	250	10×12.5	12.50	200			
6.8	8×14	10.50	220	8×16	10.50	270	8×20	9.80	230	10×16	11.00	250
6.8	10×9	12.50	240	10×12.5	10.50	280	10×14	9.80	210			
8.2	8×16	7.50	290	8×20	7.50	290	8×20	6.20	230	10×20	11.00	250
8.2	10×12.5	12.50	315	10×14	7.50	315	10×14	6.20	280			
10	8×20	12.50	290	8×20	7.50	315	10×16	6.20	280	10×20	10.00	280
10	10×14	7.50	350	10×14	7.50	350	12.5×14	6.20	360	12.5×14	7.00	320



LKG

■ 标准品一览表

电压(V)	350			400			450			500		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2℃)	纹波电流 (mA r.m.s/ 105℃ 100kHz)
12	10×16	6.20	370	10×20	6.20	490	10×20	6.20	410	12.5×16	6.50	420
15	10×16	6.20	370	10×20	6.20	490	10×20	6.20	410	12.5×20	6.00	480
15	12.5×14	6.20	490	12.5×16	6.20	550	12.5×16	6.20	460			
18	10×20	6.20	490				12.5×20	4.50	500	12.5×25	6.00	480
18	12.5×14	6.20	510	12.5×16	6.20	550						
22	10×20	6.20	550	12.5×20	6.20	1000	12.5×20	4.25	500	12.5×25	4.50	520
22	12.5×16	6.20	1060									
33	12.5×20	2.25	1060	12.5×25	4.00	1060	12.5×30	2.82	770	12.5×35	2.20	740
33				16×20	3.00	1150	16×20	3.00	730	16×25	2.20	740
47	12.5×25	2.25	1150	12.5×30	2.00	1180	16×25	2.82	1240	16×31.5	2.00	850
47	16×20	2.25	1150	16×25	2.00	1180	18×20	2.82	1200			
56	12.5×30	2.02	1220	16×25	1.82	1580	16×31.5	1.50	1240	16×35.5	2.00	850
56	16×25	2.02	1320	18×20	1.82	1530	18×25	1.50	1200	18×31.5	2.00	850
68	16×25	1.38	1580	16×31.5	1.38	1580	16×35.5	1.25	1400	18×31.5	1.80	1200
68	18×20	1.38	1530	18×25	1.38	1530	18×31.5	1.25	1460			
82	16×31.5	1.38	1580	16×35.5	1.25	2280	16×40	1.25	1460	18×35.5	1.50	1200
82	18×25	1.38	1530	18×31.5	1.25	2280	18×31.5	1.25	1460			
100	16×35.5	1.25	1945	18×31.5	1.07	2580	18×35.5	0.90	1970	18×40	1.25	1200
100	18×31.5	1.25	2280									
120	18×31.5	1.25	2780	18×35.5	0.95	2850	18×40	0.90	1970	18×45	0.98	1268
150	18×35.5	0.97	2850	18×40	0.95	2980	18×45	0.85	2080			