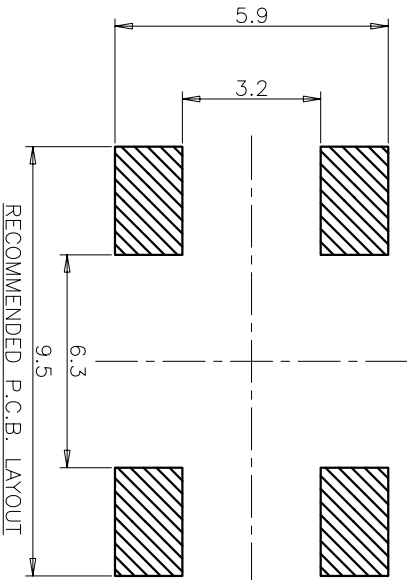
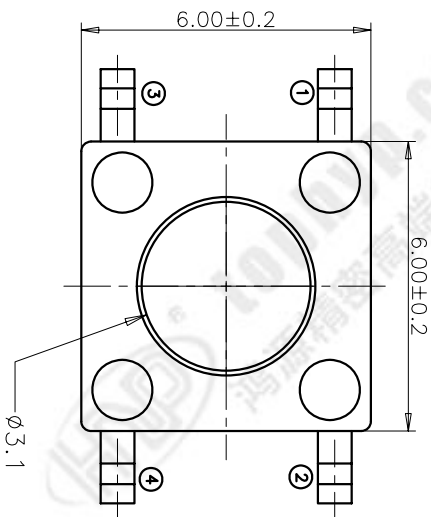

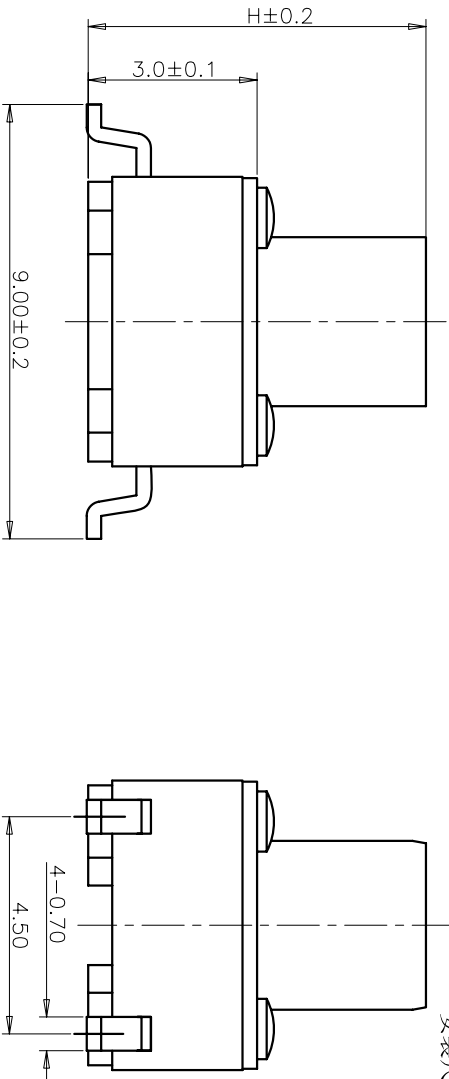


安装尺寸图
RECOMMENDED P.C.B. LAYOUT

规格 Specifications		
额定负荷 Rating	DC 12V/50mA	
接触电阻 Contact Resistance	100mΩ max.	
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.	
抗电强度 Dielectric strength	AC250V(50~60HZ) 60S min.	
操作力 Operation force	260±50gf	
寿命试验 Operating Life	100,000 cycles	
行程 Travels	0.25±0.1mm	

回路图
CIRCUIT DIAGRAM

PRODUCT NO.: 1TS 005F***0***0A2 - CT

轻触开关
系列:
外形:
按钮颜色:
底座颜色:
盖板颜色:
材质:
0=初始材质
1=新增材质
依次增加
非编带, 不启用

产品高度 (H):

430=4.3mm

500=5.0mm

600=6.0mm

700=7.0mm

800=8.0mm

900=9.0mm

操作力度:

120=120gf

160=160gf

200=200gf

260=260gf

初始颜色, 则不启用

手感:

0=常规(弹片)

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
5	COVER	1	BRASS	Ni-PLATED
4	ACTUATOR	1	PPA	BLACK
3	DOME	1	Stainless Steel/Ag	Ag-PLATED
2	TERMINAL	1	BRASS	Ag-PLATED
1	HOUSING	1	PPA	BLACK
NAME(INTENDED USE)		HON YUAN		
6X6 SERIES		HON YUAN PRECISION IND. CO.,LTD.		
TACT SWITCH		SHENZHEN, CHINA.		
PART NO.(INTENDED USE)		TITLE:		
1TS005F-2600-7000A2		PRODUCT DRAWING		
APPD:		DWG NO.:		
W.P.Lu 2018.3.31		1TS005F-2600-7000A2-CT		
CHKD:		SCALE		
S.L.Li 2018.3.31		SHEET		
DR:		REV.		
Y.Y.Chen 2018.3.31		A		

REV	ECN NO.	APPD
A	HS-18-0039	PRUJOM